
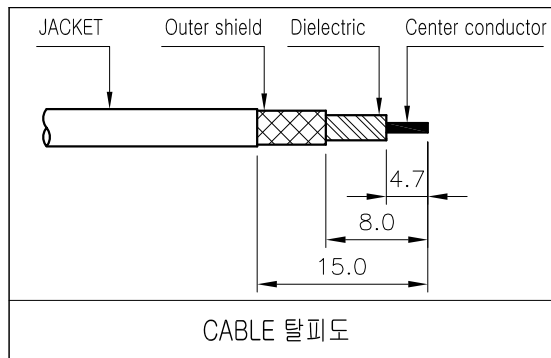



ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~3GHz
3. VSWR (Max) : 1.2
4. INSERTION LOSS : 0.2dB (Max)

■Applicable Standards
MIL-STD 348
MIL-PRF-39012

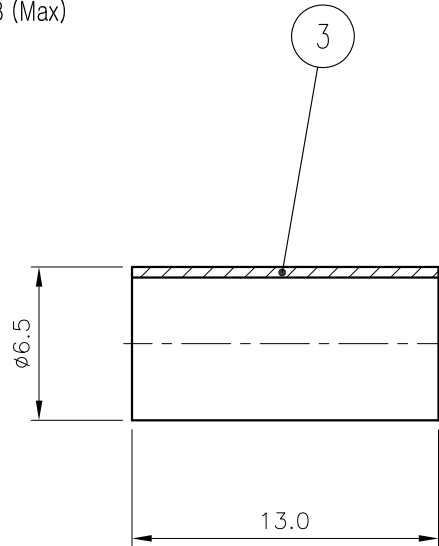

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2012.03.28.
1	[설변No.201509-0005]BODY 닙시 바늘 추가	H.J.LEE	I.C.KIM	2015.09.07.
2	설변처리No.201803-0008 상대품 체결시 가스켓 눌림현상 없음 -바디 .캡 수정	S.Y.EUN	I.C.KIM	2018.03.19.
3	커넥터 압착부 바디 부러짐 현상 방지로 인한 R추가	S.Y.EUN	S.H.KIM	2022.01.03.

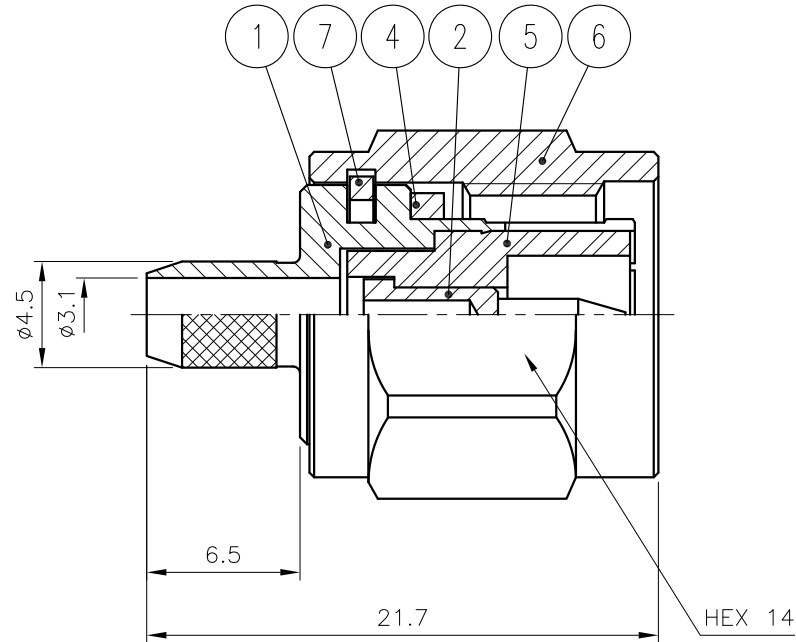

7	SPRING RING	1	SUS	Passivated	DSR00024-5/1
6	COUPLING CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00135-5/6 DCU00135-5/1
5	INSULATOR	1	TEFLON		DIN00564-N/1
4	GASKET	1	SILICONE RUB		DGK00008-N/1
3	FERRULE	1	MBsBD C3604BD-F	Nickel Plate	DFE00059-5/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT00554-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD01816-5/3 DBD01816-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.1	DATE 2022. 01. 03.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	S.H.KIM	
MATERIAL		CHECKED BY		TITLE TNC50 CABLE PS RG58
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	3/1	DWG NO. CN00375-7/3
		UNIT	mm	
A4		REVISION	3	SHEET 1 of 1