


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM	I.C.KIM	2012.10.05.

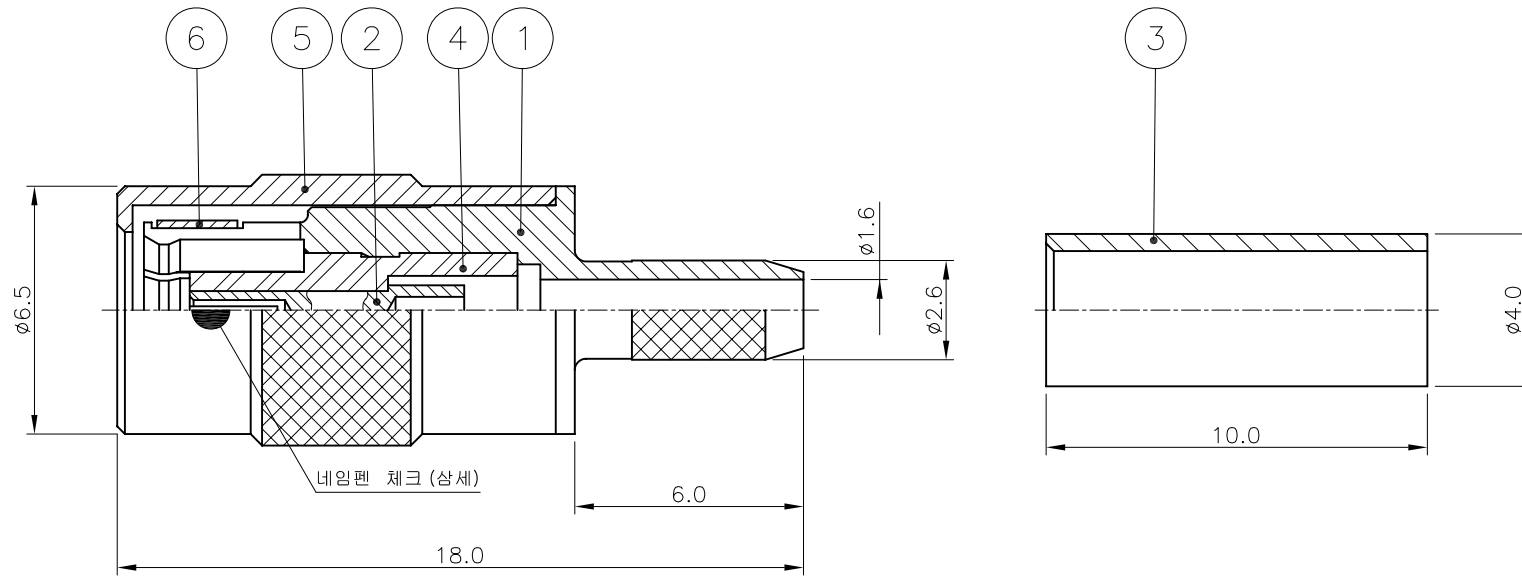

주 기

- 상대물과 삽입력, 이탈력 (상대물과 Mating 5회 이후 측정치)
 - 삽입력 : 2~4kgf 이하
 - 이탈력 : 5~8kgf 이상
- 상대물 Female 외경 $\varnothing 3.64 \sim 3.67$ 이며, MAX치로 관리하도록 되어있음.
- 도금사양

내장용 (실내)

- Nickel Plate : $5\mu\text{m}$ 이상 (BODY, JACK)

- Gold Plate : $0.4\mu\text{m}$ 이상 (CONTACT)

외장용 및 수분, 유해가스 접촉부

- Gold Plate : $0.4\mu\text{m}$ 이상 (BODY, CONTACT, JACK, CAP)

6	SPRING RING	1	BeCu	Copper Plate	DSR00009-5/1
5	CAP	1	MBsBD	Nickel Plate $5\mu\text{m}$	DCU00033-5/1
4	INSULATOR	1	TEFLON		DIN02079-N/1
3	FERRULE	1	MBsBD	Nickel Plate	DFE00034-5/2
2	CONTACT	1	BeCu	Gold Plate $0.4\mu\text{m}$	DCT01156-5/1
1	BODY	1	MBsBD	Nickel Plate $5\mu\text{m}$	DBD00484-5/4
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2012. 10. 05.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		TITLE SMB50 CABLE PS RG316
		DRAWN BY	I.C.KIM	
FINISH		SCALE	5/1	DWG NO. CN00859-7/6
		UNIT	mm	REVISION I R SHEET 1 of 1

A4