


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2020.03.25.

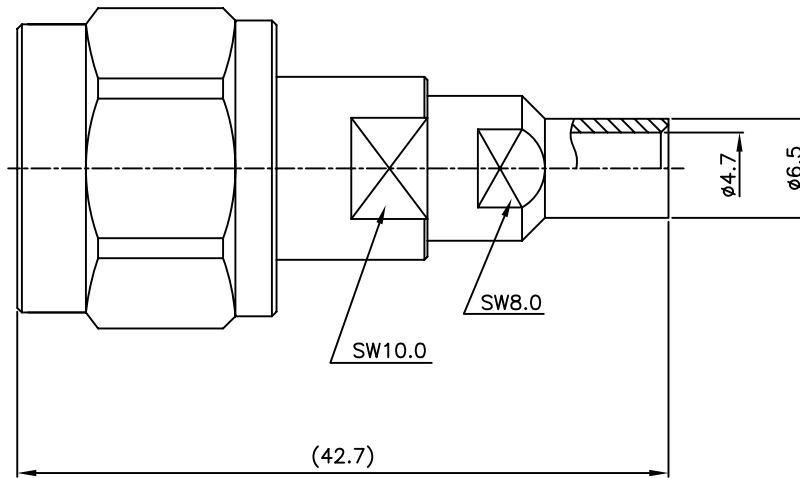

ENVIRONMENTAL DATA:


1. TEMPERATURE RANGE : -40°C ~ +85°C

ELECTRICAL DATA :

1. IMPEDANCE : 50ohm

2. FREQUENCY RANGE : DC~10GHz

3. VSWR (Max) : 1.2

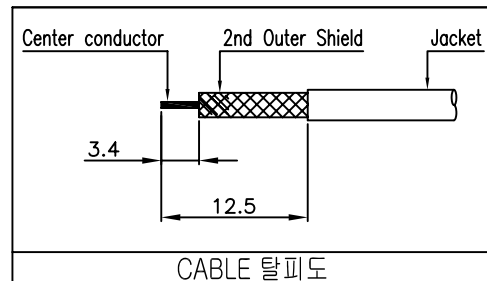

8	C-RING	1	PBR	Nickel Plate	DSR00020-5/1
7	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00063-5/3
6	INSERT	1	MBsBD C3604BD-F	Gold Plate	DIS00297-5/2
5	BACK NUT	1	MBsBD C3604BD-F	Nickel Plate	DBN00216-5/2
4	INSULATOR	1	TEFLON		DIN03051-N/1
3	GASKET	1	SILICONE RUB		DGK00013-N/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT04016-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD04495-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2020. 03. 25.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE N50 CABLE PS 141FJ/MF/141Suhner
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	UNIT	A4 DWG NO. CN01262-7/4 REVISION I R SHEET 1 of 1
		2/1	mm	