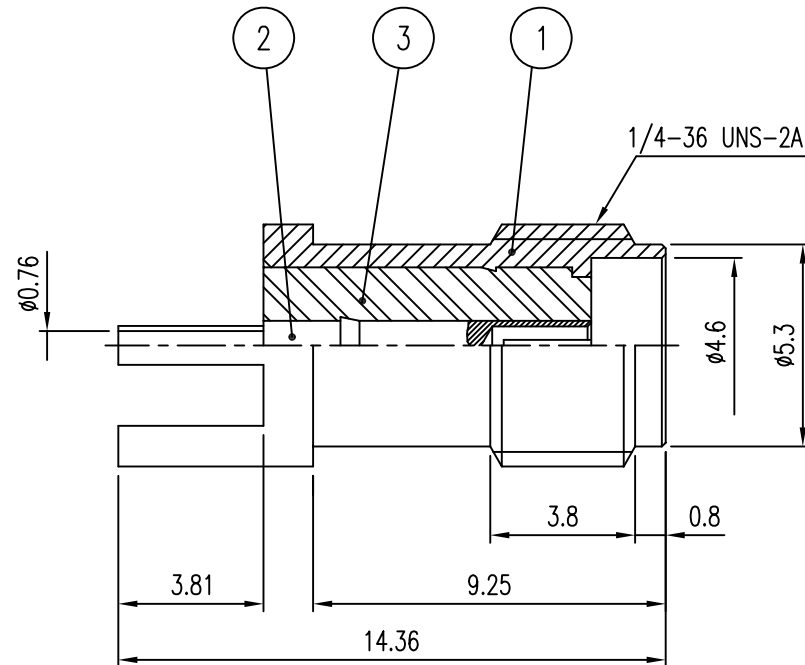
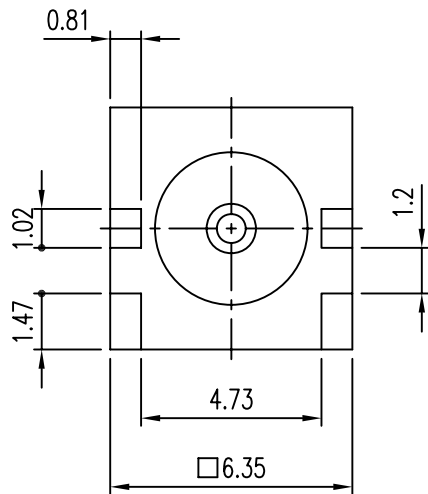


[illegible]

Notes

1. RoHS & Pb-FREE

* ELECTRICAL SPEC.

- Impedance : 50 Ω (Nominal)
- Frequency Range : DC ~ 8 GHz
- Dielectric withstanding voltage : 1000V rms
- Working voltage : 480V rms
- Insulation resistance : $\geq 5000\text{M}\Omega$
- Contact resistance : Center contact - $\leq 3.0\text{m}\Omega$
Outer contact - $\leq 2.5\text{m}\Omega$

1	3	INSULATOR	1	PTFE		DIN01366-N/1
	2	CONTACT	1	BeCu C17300	Gold Plated	DCT01662-5/1
	1	BODY	1	MBsFD C3604BD-F	Gold Plated	DBD02138-5/1
	NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	REMARKS

CUSTOMER	DATE		2015. 07. 13.		 RF & MICROWAVE TECHNOLOGY Tel : 82-02-347-8015 Fax : 82-02-347-8017
	APPROVED BY	I.C.KIM			
CUSTOMER CODE	CHECKED BY	S.M.LEE		TITLE	SMA50 PCB JS-4R
	DRAWN BY	H.J.LEE			
TOLERANCES .* .* ±0.1	SCALE	UNIT	WEIGHT	A4	DWG NO. CN02157-7/1
	5/1	mm	—		OLD CODE.