


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	S.H.KIM	2022.02.24.

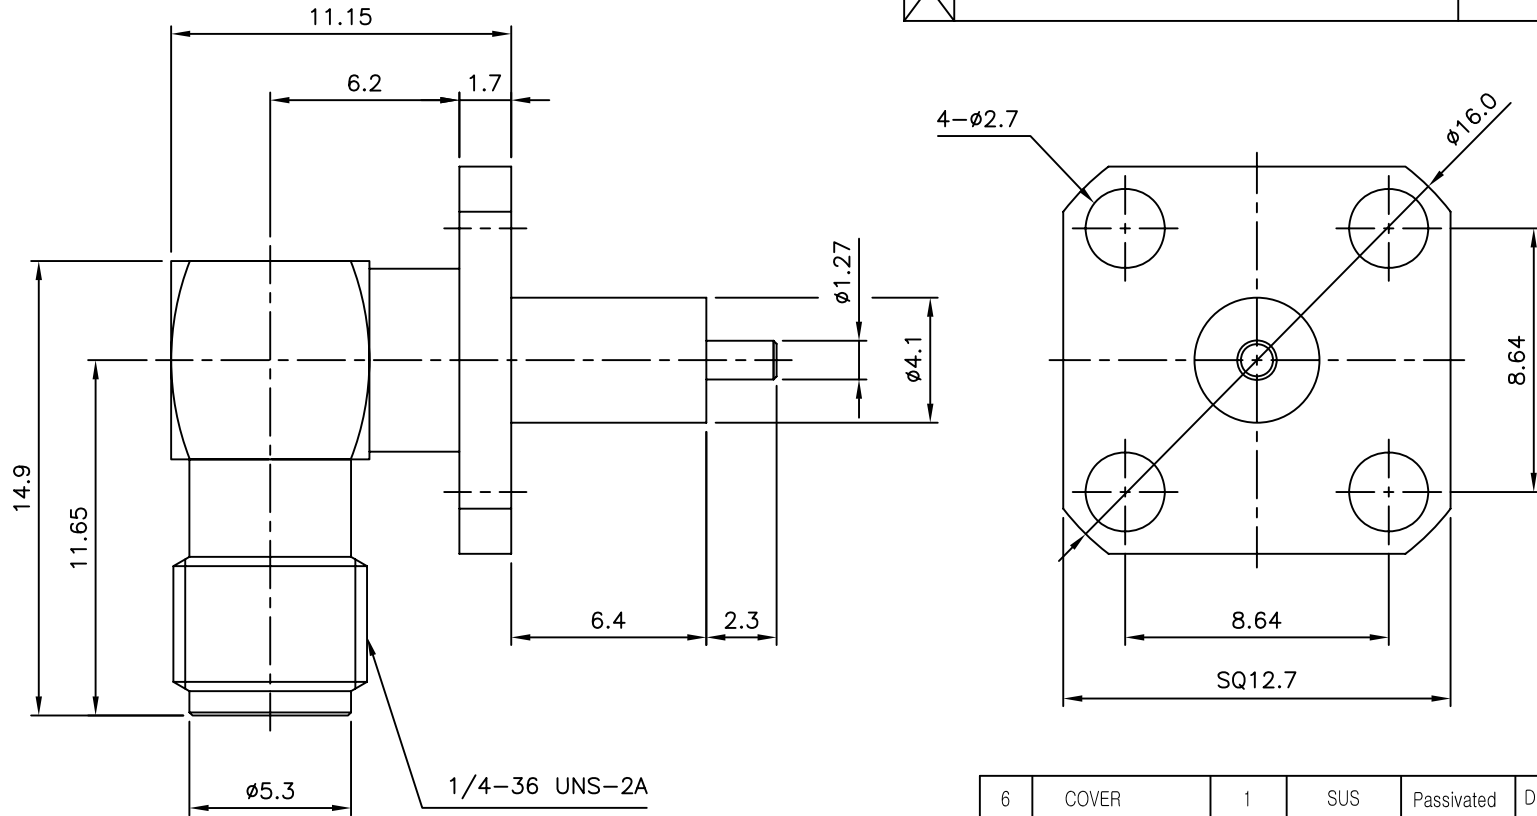

* ELECTRICAL SPECIFICATIONS

Impedance : 50Ω

Frequency Range : DC ~ 8.5GHz

V.S.W.R (Max.) : 1.35 : 1

* 주 기

1. 조립 & 전기적 스펙 (Data) 측정 방법

1-1 CN0220-7/1 (FLANGE TERMINATOR JIG)를 준비한다.

1-2 그림 A와 같이 조립된 JIG에 제품 FLANGE 면을 밀착시켜
M2.6-6mm 나사 4ea를 체결한다.

1-3 계측기 장비를 이용하여 주파수 범위 DC~8.5GHz까지

1 PORT SMA FEMALE CALIBRATION을 한다.

1-4 CALIBRATION 된 상태에서 1-2까지 조립된 제품을 측정한다.

6	COVER	1	SUS	Passivated	DCO00078-5/1
5	INSULATOR	1	TEFLON		DIN01390-N/3
4	INSULATOR	1	TEFLON		DIN01389-N/1
3	CONTACT	1	MBsBD C3604BD-F	Gold Plated	DCT01706-5/4
2	CONTACT	1	BeCu C17300	Gold Plated	DCT01707-5/1
1	1-2 BODY (B)	1	SUS	Passivated	DBD02213-N/1
	1-1 BODY (A)	1	SUS	Passivated	DBD02212-N/3
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2022. 02. 24.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	S.H.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE SMA50 SOLDER END JL-4H
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	4/1	A4 DWG NO. CN02316-7/4 REVISION I R SHEET 1 of 1
		UNIT	mm	