
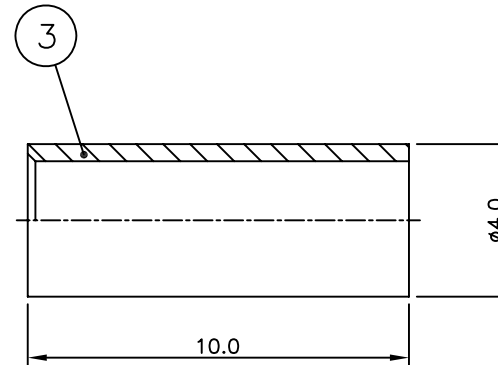


주 기

- 상대물과 삽입력과 이탈력 (상대물과 Mating 5회 이후 측정치)
 - 삽입력 : 2~4kgf
 - 이탈력 : 5~8kgf
- 상대물 Female 외경 $\phi 3.64 \sim 3.670$ 이며 MAX쪽으로 관리하도록 되어있음
- 도금 사양
내장용(실내)
 - Nickel Plate : $5\mu\text{m}$ 이상 (BODY, JACK, COVER)
 - Gold Plate : $0.4\mu\text{m}$ 이상 (CONTACT)

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	E.H.KIM	J.H.YOUN	2009.07.16.
1	[설번처리No.연구200907-0017]신뢰성 향상(특성 및 조립성 개선 으로 인한 내부 구조 변경)	E.H.KIM	J.H.YOUN	2009.07.30.
2	[설번처리No.연구200912-0004]업체 요구 (품번 3 번 FERRULE 삭제)	E.H.KIM	J.H.YOUN	2009.07.30.
3	[설번No.201006-0013]공용화 (부품 공용화로 인한 TEFLON 변경)	I.C.KIM	Y.H.CHOI	2010.06.16.
4	[설번처리 No.연구201310-0012] 업체요청 (커버,절연커버 구성 삭제)	E.H.KIM	I.C.KIM	2013.10.24.
5	[설번 No.201501-0015] 요청으로 인한 COVER 및 FERRULE 구성 추가	H.J.LEE	I.C.KIM	2015.01.21.

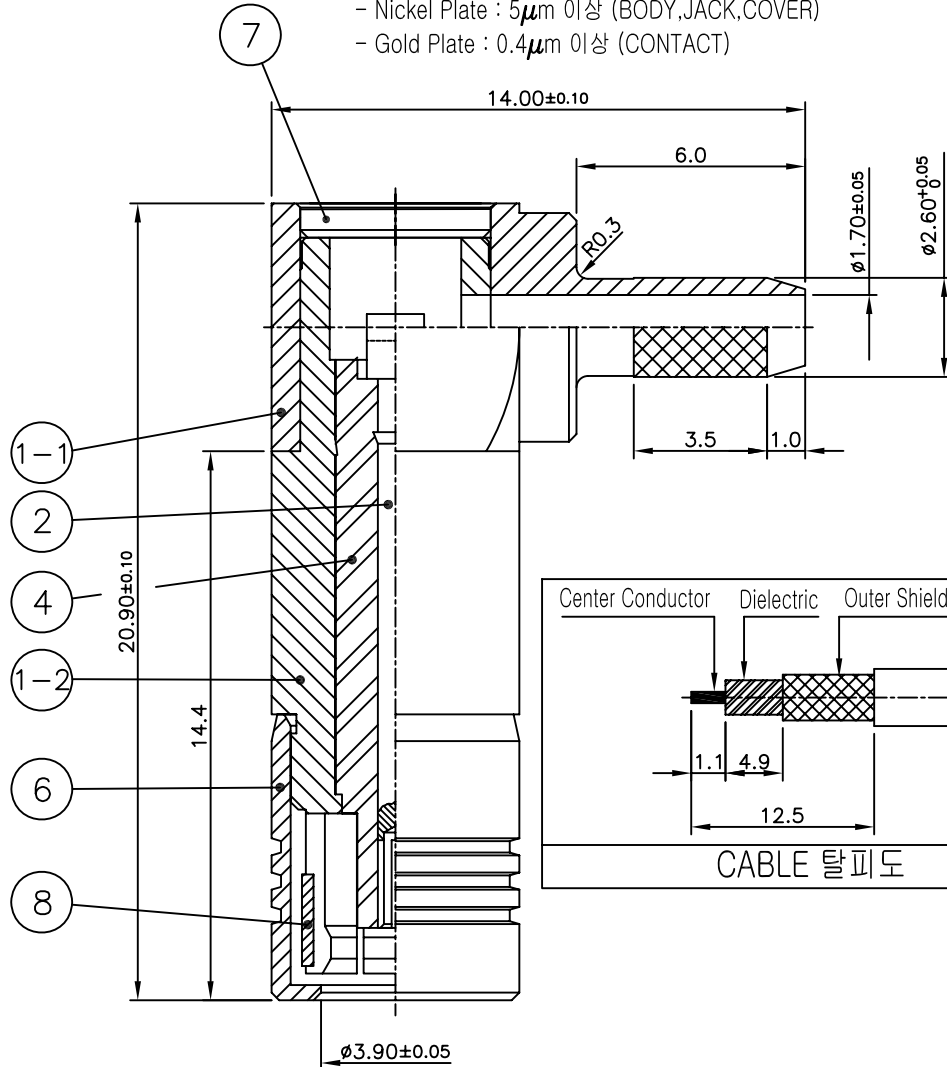

8	SPRING RING	1	BeCu C17300	COPPER Plate	DSR00009-5/1 (R3009)
7	COVER	1	MBsBD C3604BD-F	Nickel Plate $5\mu\text{m}$	DCO00029-5/1 (L3016)
6	CAP	1	MBsBD C3604BD-F	Nickel Plate $5\mu\text{m}$	DCU00030-5/1 (K3021)
5	INSULATOR	1	PTFE	White	DIN00922-N/1 (H3143) DIN00937-N/1 (H3106)
4	INSULATOR	1	PTFE	White	DIN01619-N/1 DIN01241-N/1 (H3153)
3	FERRULE	1	MBsBD C3604BD-F	Nickel Plate	DFE00034-5/2
2	CONTACT	1	BeCu C17200	Gold Plate $0.4\mu\text{m}$	DCT01459-5/1 (E3171)
1-2	원형 BODY	1	MBsBD C3604BD-F	Nickel Plate $5\mu\text{m}$	DBD02549-3/1 DBD02415-3/1
1-1	사각 BODY	1	MBsBD C3604BD-F	Nickel Plate $5\mu\text{m}$	DBD00243-5/1 DBD00456-3/1 (D3158A)

NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE
DATE 2015. 01. 21.					
TOLERANCE			APPROVED BY I.C.KIM		
MATERIAL			CHECKED BY		
FINISH			DRAWN BY H.J.LEE		
SCALE 5/1			UNIT mm		
DATE 2015. 01. 21.			TITLE SMB50 CABLE PL RG316(LONG)		
DWG NO. CN02352-7/2			REVISION 5		
SHEET 1 of 1			A4		

