


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2009.04.29.
A	부적합 개선 [설번처리No.연구200912-0007] (부적합 개선 으로 인한 너어림부 치수 공차 추가)	2009.12.10.

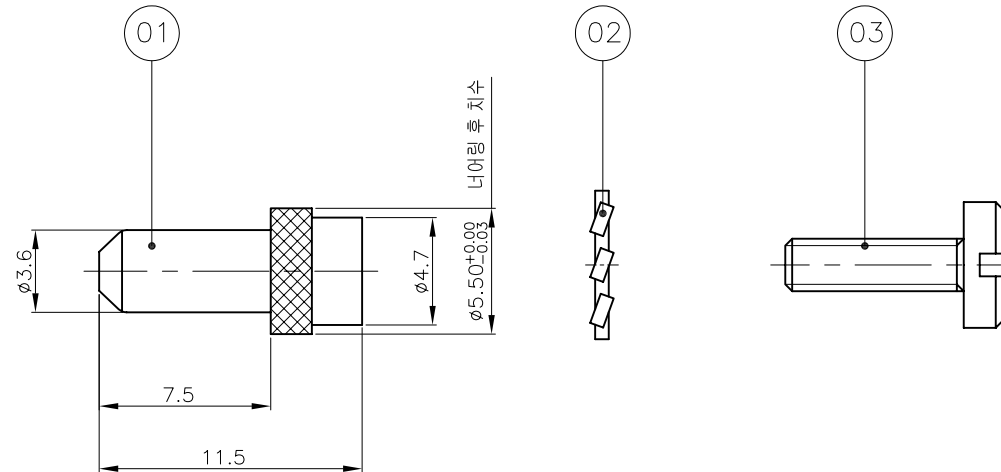

* NOTE *

Electrical Performance

- Current Rating 40 amp max
- Resistance 1 m max

Operating Environment

- Temperature Range -30°c to -90°c

* NOTE *

1. 구매시 HOUSING은 별도 입니다

3	BOLT	1	MBsBD	Nickel Plate (0.1μm이상)	DBT00980-N/1
2	WASHER	1	MBsBD	Gold Plate	DWA00095-N/1
1	BODY	1	MBsBD	Gold Plate (0.9μm이상)	DBD02454-N/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2009. 12. 10.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN		
MATERIAL	±1°	CHECKED BY	I.C.KIM		TITLE POWER INSERT SCREW TYPE
		DRAWN BY	D.W.KANG		
FINISH		SCALE	UNIT	 A4	DWG NO. CN02383-N/2
		3/1	mm		REVISION A