
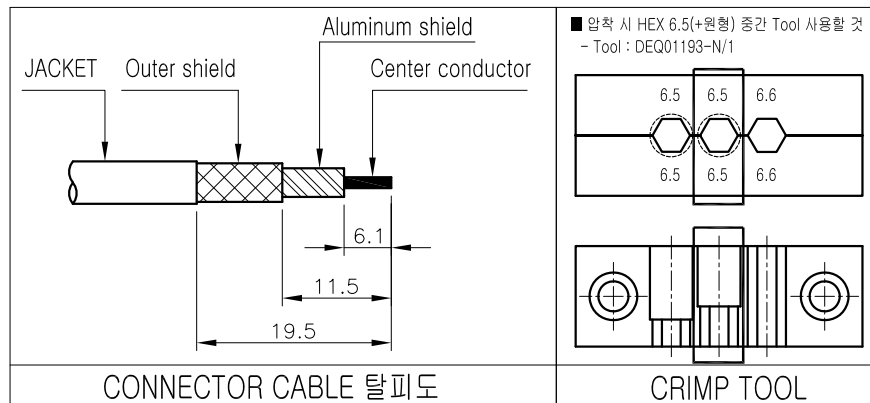


ELECTRICAL DATA


1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~3GHz
3. VSWR (Max) : 1.2

5/8-24 UNEF-2A

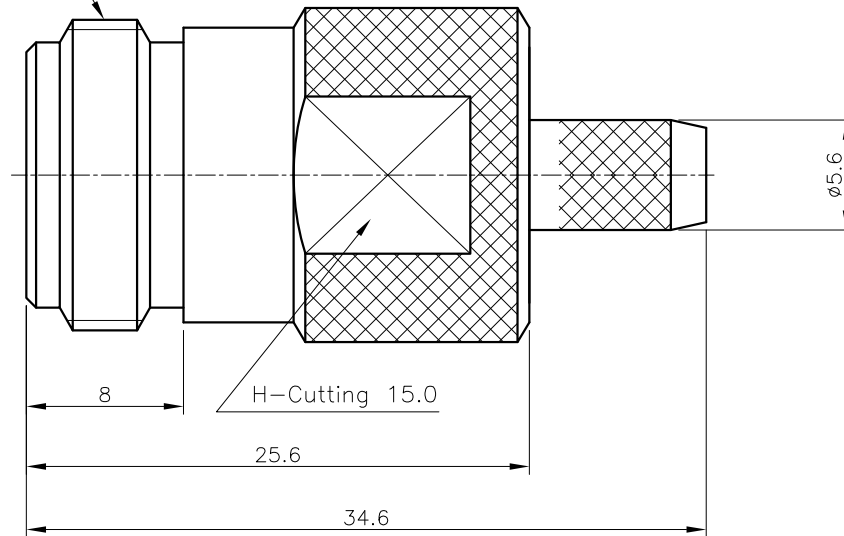

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM	Y.H.CHO	2010.06.11.
1	BODY 스페너 부위 H-CUTTING 추가	I.C.KIM		2018.10.04.
2	BODY 날링 추가	S.Y.EUN	I.C.KIM	2020.07.29.
3	특성 개선 핀 형상 변경	S.H.KIM		2022.06.20.
4	본딩튜브 외경 및 길이 변경	S.H.KIM		2023.12.26.

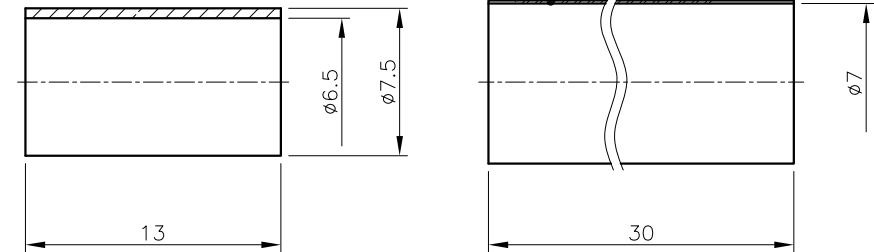

4	6	BONDING TUBE	1	—	—	ATU00350-N/1 Ø7-30 Black ATU00351-N/1 Ø8-50 Black
	5	INSULATOR	1	TEFLON		DIN00672-N/1 (H8226)
	4	FERRULE	1	MBsBD C3604BD-F	Nickel Plate	DFE00062-5/2
	3	CONTACT	1	BeCu C17300	Gold Plate	DCT00669-5/6 DCT00669-5/2
	2	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD01301-5/2
	1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD02789-5/2 DBD02789-5/1
	NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.2	DATE 2023. 12. 26.			 COMTECH KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°	APPROVED BY				
MATERIAL _____	CHECKED BY			TITLE N50 CABLE JS LMR240		
	DRAWN BY S.H.KIM					
FINISH _____	SCALE 2.5/1	UNIT mm		A4	DWG NO. CN02504-7/1	
					REVISION 4	SHEET 1 of 1