
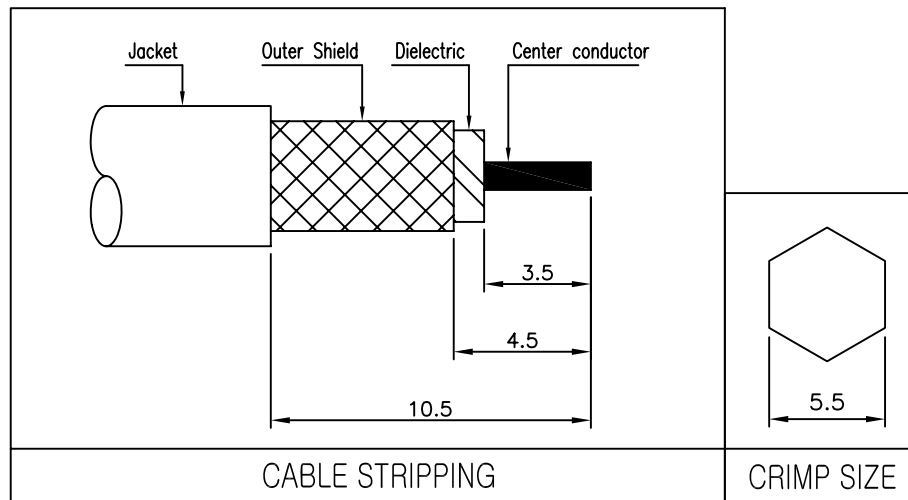
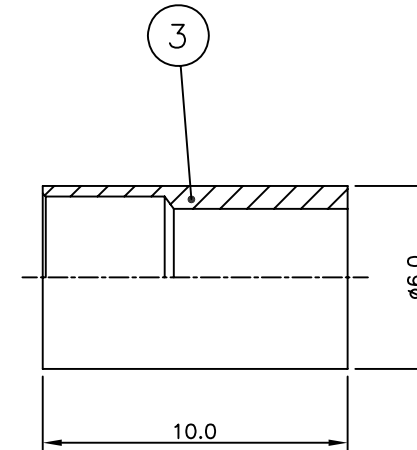


* 측정 ADAPTOR : AD00644-7/2
- 2.92mm (J) 2.92mm (J)

■ 작업 전 샘플로 PIPE 전체 압착하여 특성 확인 후, 해당 Lot 모두 PIPE 전체 압착하여 작업할 것

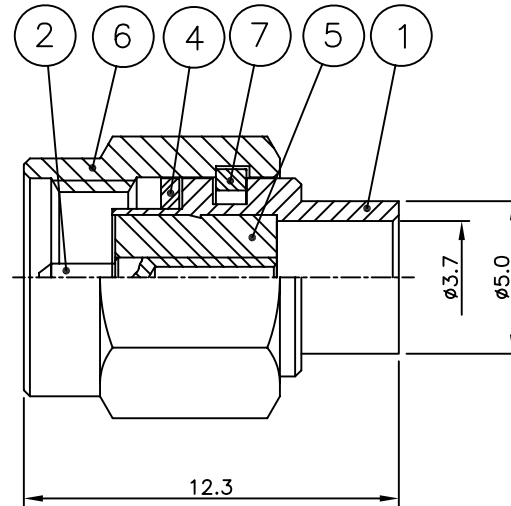

7	SPRING RING	1	SUS	Passivated	DSR00002-5/1 (R2001)
6	COUPLING CAP	1	MBsBD C3604BD-F	Gold Plate	DCU00005-5/1
5	INSULATOR	1	TEFLON		DIN00173-N/1 (H2306)
4	GASKET	1	SILICONE RUB		DGK00004-N/1 (G2001)
3	FERRULE	1	MBsBD C3604BD-F	Nickel Plate	DFE00162-5/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT00286-5/1 (E2143)
1	BODY	1	MBsBD C3604BD-F	Gold Plate	DBD03205-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2016. 03. 30.	
	Angle	APPROVED BY	I.C.KIM
MATERIAL	-	CHECKED BY	H.J.LEE
		DRAWN BY	C.K.KIM
FINISH	-	SCALE	4/1
		UNIT	mm

		RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
KJ COMTECH CO.,LTD.		TITLE SMA50 CABLE PS 141MF(50Ω)	
DWG NO. CN02764-7/4		REVISION I R	
A4		SHEET 1 of 1	