
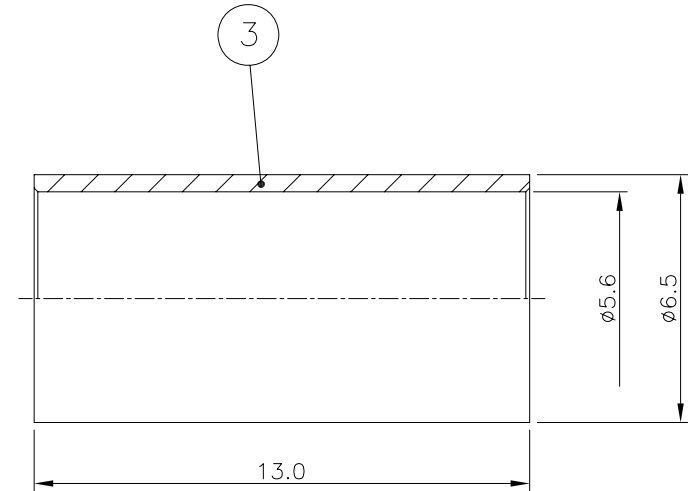


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	E.H.KIM	I.C.KIM	2012.02.23.

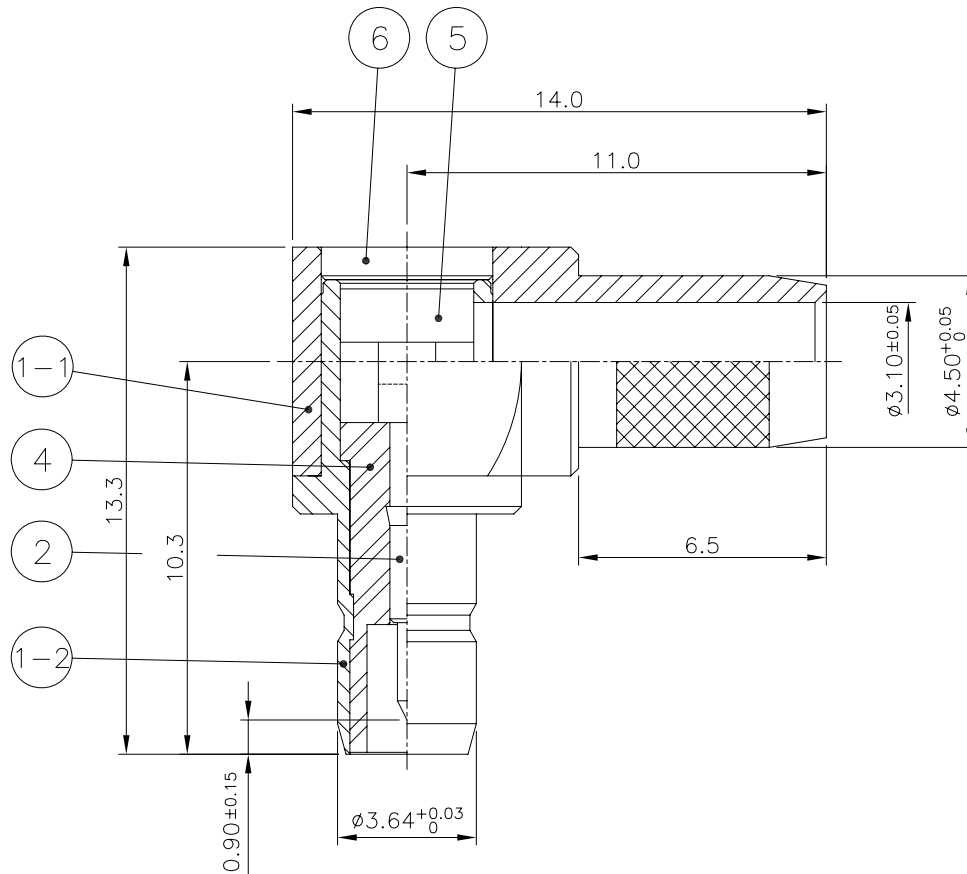

주 기

- 상대물과의 삽입력, 이탈력 (상대물과 Mating 5회 이후 측정치)
-삽입력 : 2~4kgf 이하
-이탈력 : 5~8kgf 이상
- 상대물 Male Jack 내경 $\phi 3.44 \sim 3.45$ 관리
- 도금 사양

내장용(실내)

- Nickel Plate : $5\mu\text{m}$ 이상 (BODY, JACK, COVER)
- Gold Plate : $0.4\mu\text{m}$ 이상 (CONTACT)

외장용 및 수분, 유해가스 접촉부

- Gold Plate : $0.4\mu\text{m}$ 이상 (BODY, CONTACT, JACK, COVER)

6	COVER	1	MBsBD	Nickel Plate ($5\mu\text{m}$)	DCO00020-5/1
5	INSULATOR	1	TEFLON		DIN00922-N/1
4	INSULATOR	1	TEFLON		DIN01978-N/1
3	FERRULE	1	MBsBD	Nickel Plate	DFE00059-5/1
2	CONTACT	1	MBsBD	Gold Plate ($0.4\mu\text{m}$)	DCT02555-3/1
1	1-2 BODY	1	MBsBD	Nickel Plate ($5\mu\text{m}$)	DBD03025-3/1
	1-1 BODY	1	MBsBD		DBD02998-3/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2012.02.23.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO., LTD. TITLE SMB50 CABLE JL RG58 L/L
		DRAWN BY	E.H.KIM	
FINISH		SCALE	2.5/1	A4 DWG NO. CN02769-7/1 REVISION I R SHEET 1 of 1
		UNIT	mm	