



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	E.H.KIM	I.C.KIM	2013. 03. 05.
1	내부 방수 가스켓 추가	I.C.KIM		2020. 05.13.
2	고객사 요청사항으로 인한 포장사양 추가 (2page)	S.Y.EUN	I.C.KIM	2020. 10.27.
3	특성 뛰는 현상 발생, BODY-B 억지끼움 외경 늘림 변경	S.H.KIM		2023. 06.22.

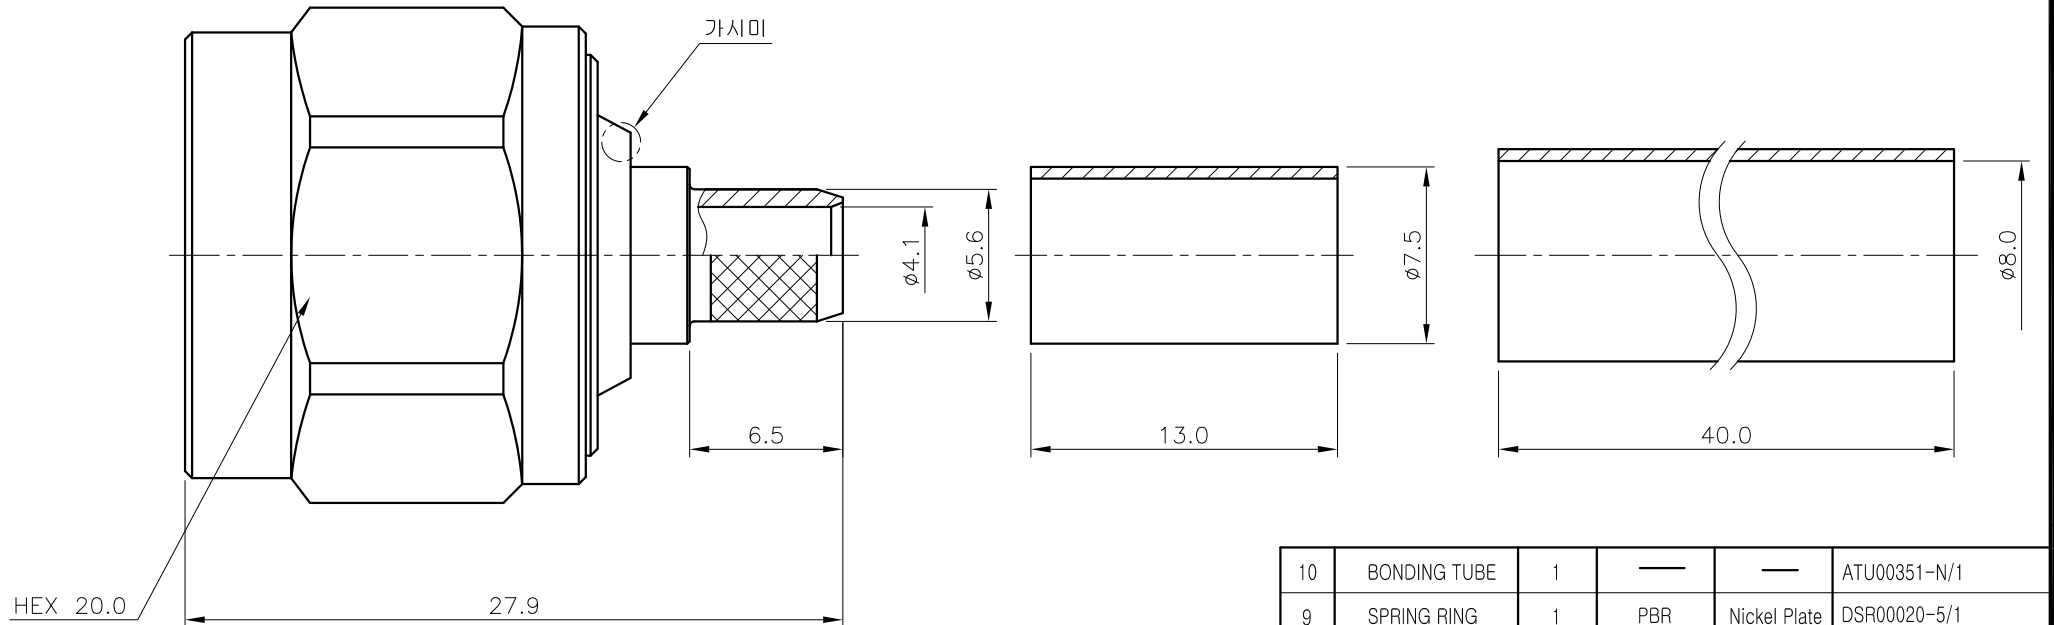

*Pin Solder type

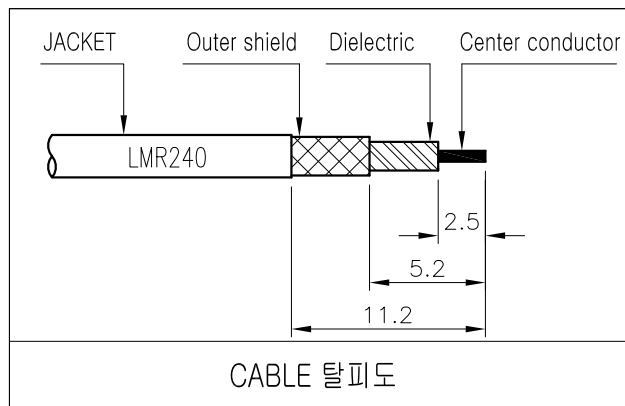

ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~4GHz
3. VSWR (Max) : 1.2

10	BONDING TUBE	1	—	—	ATU00351-N/1
9	SPRING RING	1	PBR	Nickel Plate	DSR00020-5/1
8	COUPLING CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00063-5/3
7	INSULATOR	1	TEFLON		DIN02014-N/1
6	GASKET	1	SILICONE RUB		DGK00269-N/2
5	GASKET	1	SILICONE RUB		DGK00013-N/1
4	FERRULE	1	MBsBD C3604BD-F	Nickel Plate	DFE00062-5/2
3	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT02608-5/1
2	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD03076-5/3 DBD03076-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD03071-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.3	DATE 2023. 06. 22.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY			
MATERIAL _____		CHECKED BY			TITLE N50 CABLE PS LMR240
		DRAWN BY S.H.KIM			
FINISH _____		SCALE 3/1	UNIT mm		A4
					DWG NO. CN02806-7/3
					REVISION 3
					SHEET 1 of 1