



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	I.C.KIM		2021. 09. 24.
1	특성 뒤는 현상 발생, BODY-B 억지끼움 외경 늘림 변경	S.H.KIM		2023.06.22.

*Pin Solder type

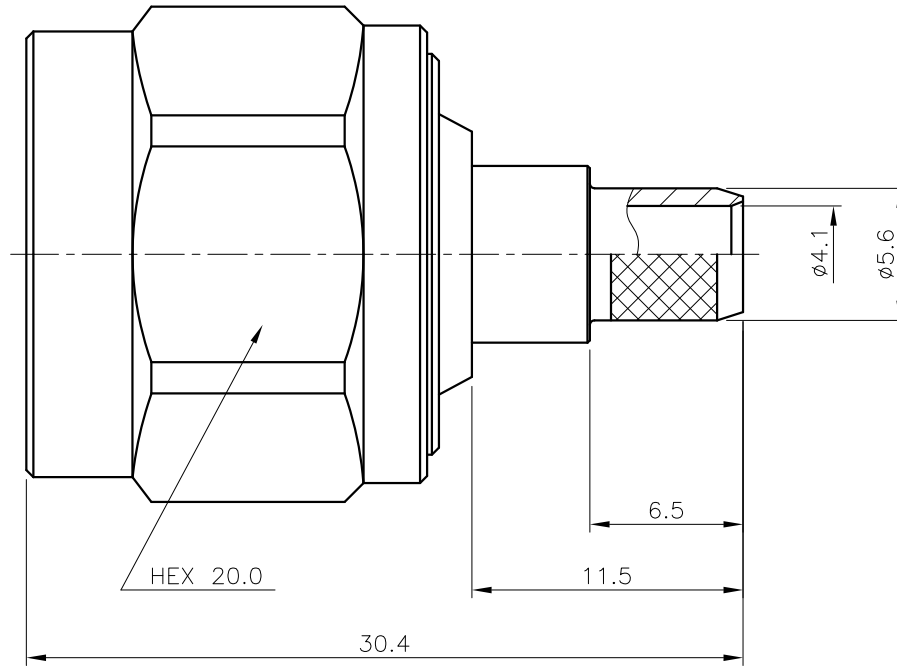


ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~4GHz
3. VSWR (Max) : 1.2

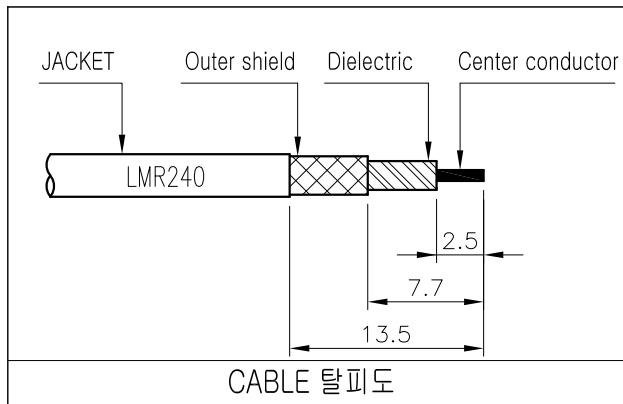

10	BONDING TUBE	1	—	—	ATU00351-N/1
9	SPRING RING	1	PBR	Nickel Plate	DSR00020-5/1
8	COUPLING CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00063-5/3
7	INSULATOR	1	TEFLON		DIN02014-N/1
6	GASKET	1	SILICONE RUB		DGK00269-N/2
5	GASKET	1	SILICONE RUB		DGK00013-N/1
4	FERRULE	1	MBsBD C3604BD-F	Nickel Plate	DFE00062-5/2
3	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT02608-5/1
2	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD03076-5/5 DBD03076-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD03071-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.3	DATE 2023. 06. 22.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°	APPROVED BY				
MATERIAL _____		CHECKED BY			TITLE N50 CABLE PS LMR240	
		DRAWN BY S.H.KIM				
FINISH _____		SCALE 3/1	UNIT mm		A4	DWG NO. CN02806-7/7
					REVISION 1	SHEET 1 of 1