



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2019.10.25.

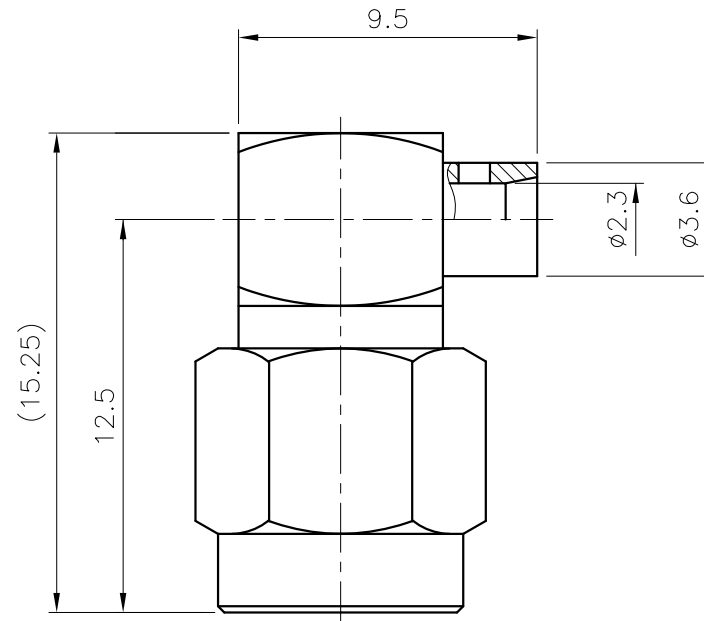

ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~12GHz
3. VSWR (Max) : 1.2

7	SPRING RING	1	SUS	Passivated	DSR00002-5/1
6	COVER	1	MBsBD C3604BD-F	Gold Plate	DCO00096-5/3
5	COUPLING CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00005-5/2
4	INSULATOR	1	TEFLON		DIN03095-N/1
3	GASKET	1	SILICONE RUB		DGK00004-N/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT04080-5/1
1	BODY	1	MBsBD C3604BD-F	Gold Plate	DBD04109-5/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

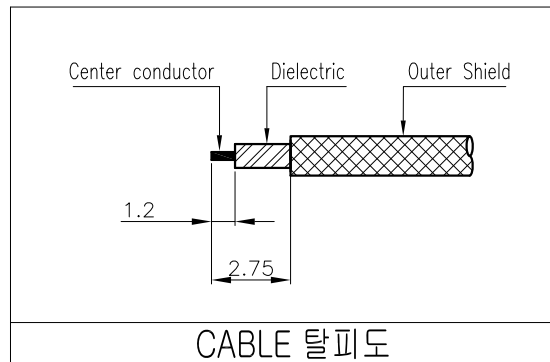

TOLERANCE	Decimal ±0.3	DATE 2019. 10. 25.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°	APPROVED BY				
MATERIAL -		CHECKED BY			TITLE SMA50 CABLE PL 85F(50Ω)	
		DRAWN BY I.C.KIM				
FINISH -		SCALE 4/1	UNIT mm		DWG NO. CN02810-7/7	SHEET 1 of 1
					REVISION I R	