
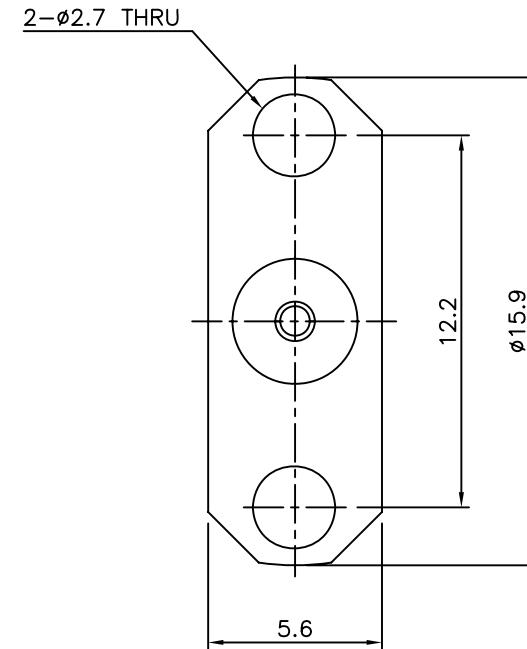


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM	I.C.KIM	2012.09.12.

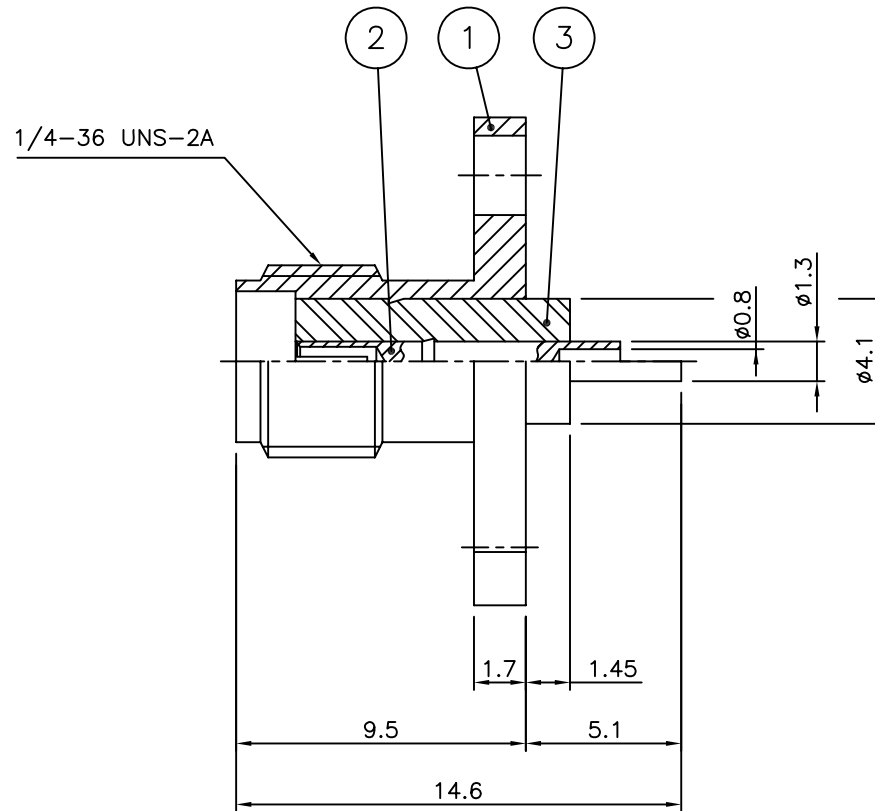

*SMA Female 받침 JIG이용하여 조립 진행

* ELECTRICAL SPECIFICATIONS

Impedance : 50Ω

Frequency Range : DC~18GHz

Insulation Resistance = 5000mΩ max

Insertion Loss = $\leq 0.07/f(\text{GHz})^{1/2}\text{dB}$ @6GHz

3	INSULATOR	1	PTFE		DIN01997-N/1
2	CONTACT	1	Beryllium copper	Gold Plated	DCT02663-5/1
1	BODY	1	Stainless steel	Passivated	DBD03145-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2012. 09. 12.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		TITLE SMA50 SOLDER END JS-2H
		DRAWN BY	I.C.KIM	
FINISH		SCALE	4/1	DWG NO. CN02852-7/1
		UNIT	mm	
				REVISION I R SHEET 1 of 1