

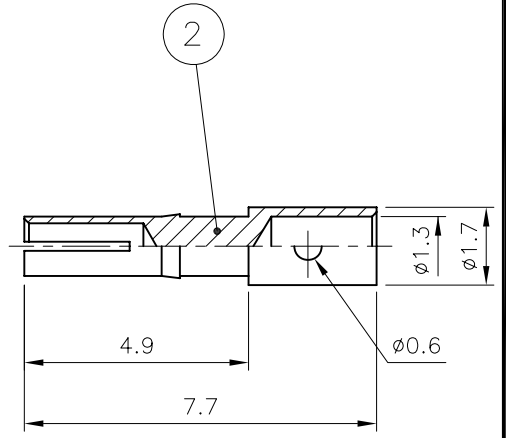
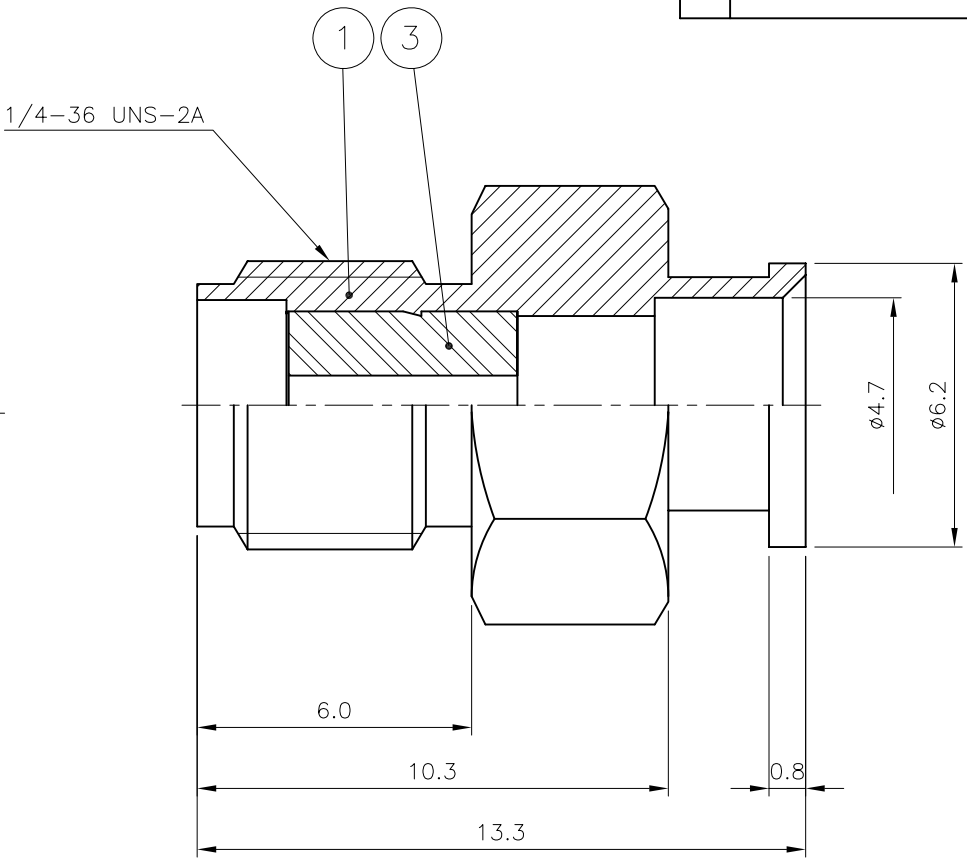


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM	I.C.KIM	2012.10.05.

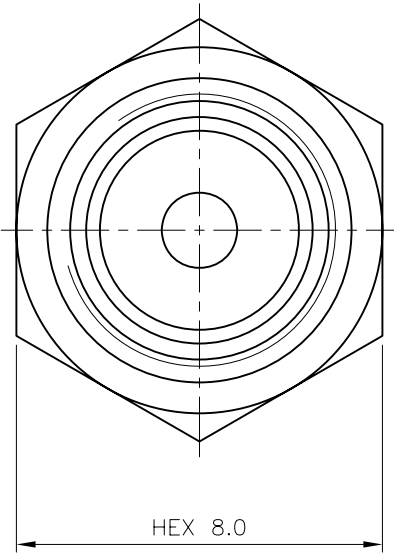

SMA-P-010(J)

* ELECTRICAL SPECIFICATIONS
 Impedance : 50Ω
 Frequency Range : DC~5GHz
 V.S.W.R (MAX) : 1.15
 Dielectric Withstanding Voltage : 1000V
 Insulation resistance (MΩ) : ≥5000
 * Environmental data
 Operating Temperature : -40 ~ 80°C
 RoHS Compliant

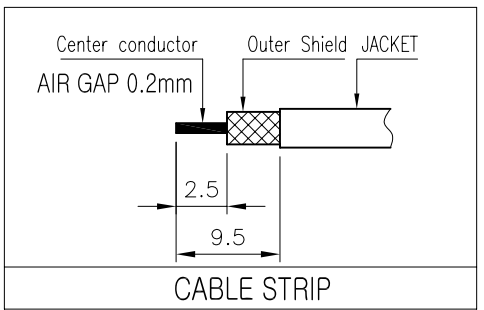

3	INSULATOR	1	PTFE		DIN02067-N/1
2	CONTACT	1	Beryllium copper	Silver Plate (5μm)	DCT02667-5/1
1	BODY	1	BRASS	Silver Plate (4μm)	DBD03151-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2012. 10. 05.	
	Angle	APPROVED BY	I.C.KIM
MATERIAL		CHECKED BY	
		DRAWN BY	I.C.KIM
FINISH		SCALE	UNIT
		6/1	mm

RF & MICROWAVE TECHNOLOGY
 Tel : 82-32-347-8015
 Fax : 82-32-347-8017

KJ COMTECH CO.,LTD.

TITLE
SMA50 CABLE JS FLEXIFORM 380HFJ

DWG NO. **CN02856-7/1**

REVISION | R | SHEET 1 of 1

A4