
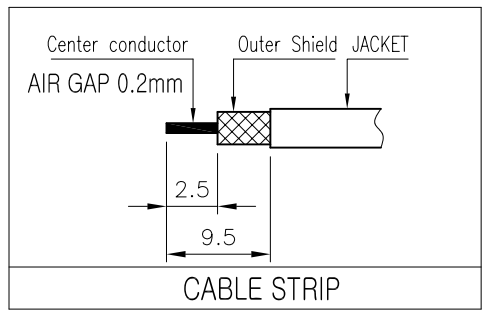
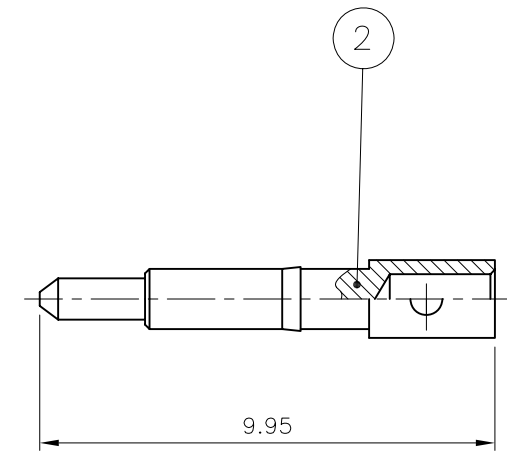


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM	I.C.KIM	2012.09.19.

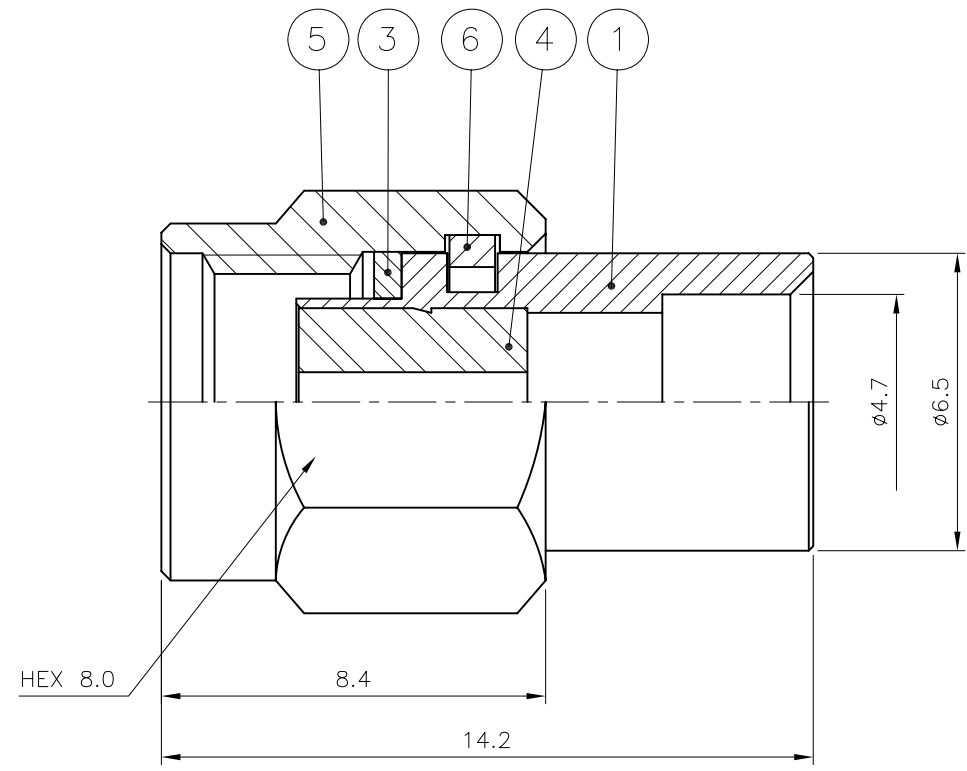

* ELECTRICAL SPECIFICATIONS
 Impedance : 50Ω
 Frequency Range : DC~5GHz
 V.S.W.R (MAX) : 1.15
 Dielectric Withstanding Voltage : 1000V
 Insulation resistance (MΩ) : ≥5000
 * Environmental data
 Operating Temperature : -40 ~ 80°C
 RoHS Compliant

6	SPRING RING	1	Stainless steel	Passivated	DSR00002-5/1
5	CAP	1	BRASS	SUCO Plate (3μm)	DCU00005-5/4
4	INSULATOR	1	PTFE		DIN02067-N/1
3	GASKET	1	SILICONE RUB		DGK00004-N/1
2	CONTACT	1	BRASS	Silver Plate (5μm)	DCT02668-5/1
1	BODY	1	BRASS	Silver Plate (4μm)	DBD03152-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2012. 09. 19.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		TITLE SMA50 CABLE JS FLEXIFORM 380HFJ
		DRAWN BY	I.C.KIM	
FINISH		SCALE	6/1	DWG NO. CN02857-7/1 REVISION I R SHEET 1 of 1
		UNIT	mm	

A4