
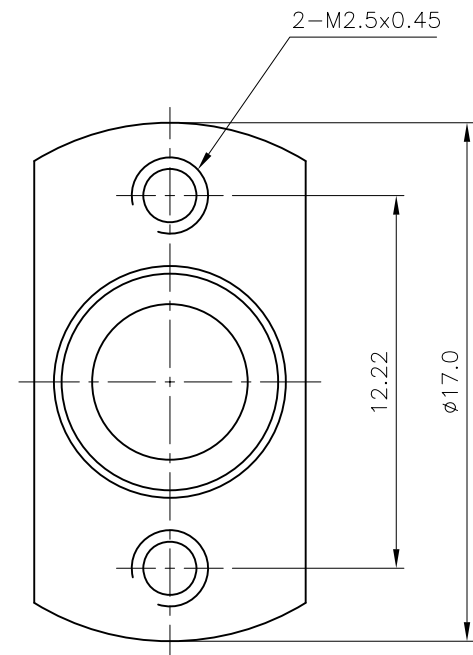


REVISION					
REV	DESCRIPTION			DRAWN	APPR
IR	Initial Registration			I.C.KIM	I.C.KIM
					DATE
					2012.09.19.

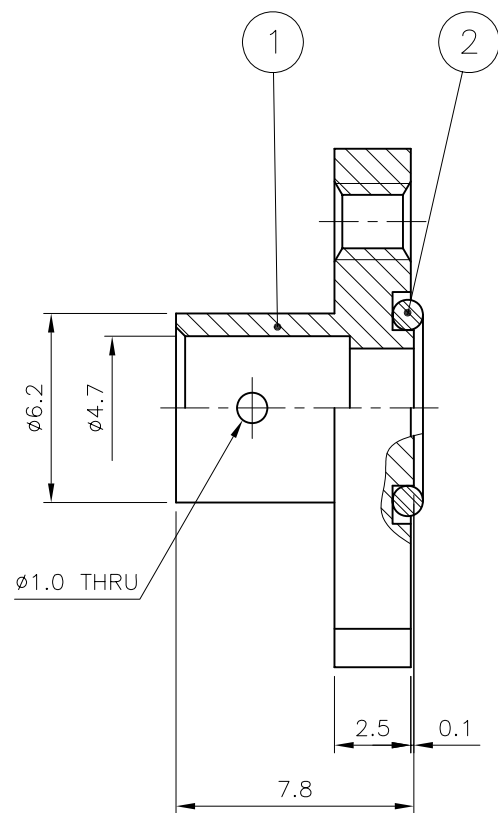

* ELECTRICAL SPECIFICATIONS

Impedance : 50Ω

Frequency Range : DC~5GHz

V.S.W.R (MAX) : 1.15

Dielectric Withstanding Voltage : 1000V

Insulation resistance (MΩ) : ≥5000

* Environmental data

Operating Temperature : -40 ~ 80°C

RoHS Compliant

2	GASKET	1	SILICONE RUB		DGK00237-N/1
1	BODY	1	BRASS	Silver Plate (4μm)	DBD03155-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE2012. 09. 19.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM		
MATERIAL	±0.1	CHECKED BY			TITLE TERMINATOR CABLE H2 FLEXIFORM 380HFJ
	±1°	DRAWN BY	I.C.KIM		
FINISH		SCALE	UNIT	 A4	DWG NO. CN02859-7/1 REVISION I R SHEET 1 of 1
		4/1	mm		