
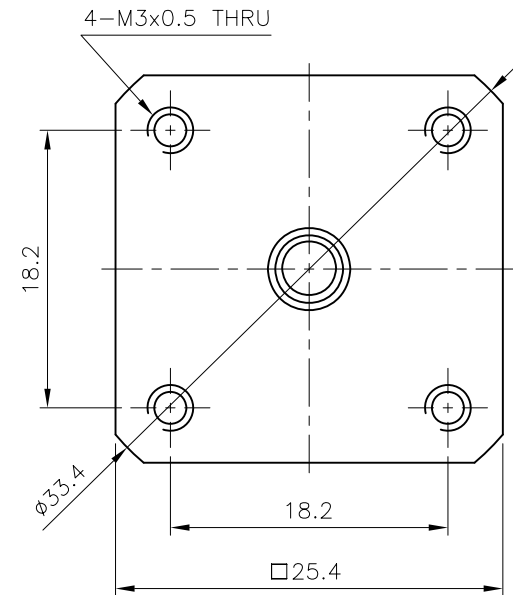


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM	I.C.KIM	2012.12.05.

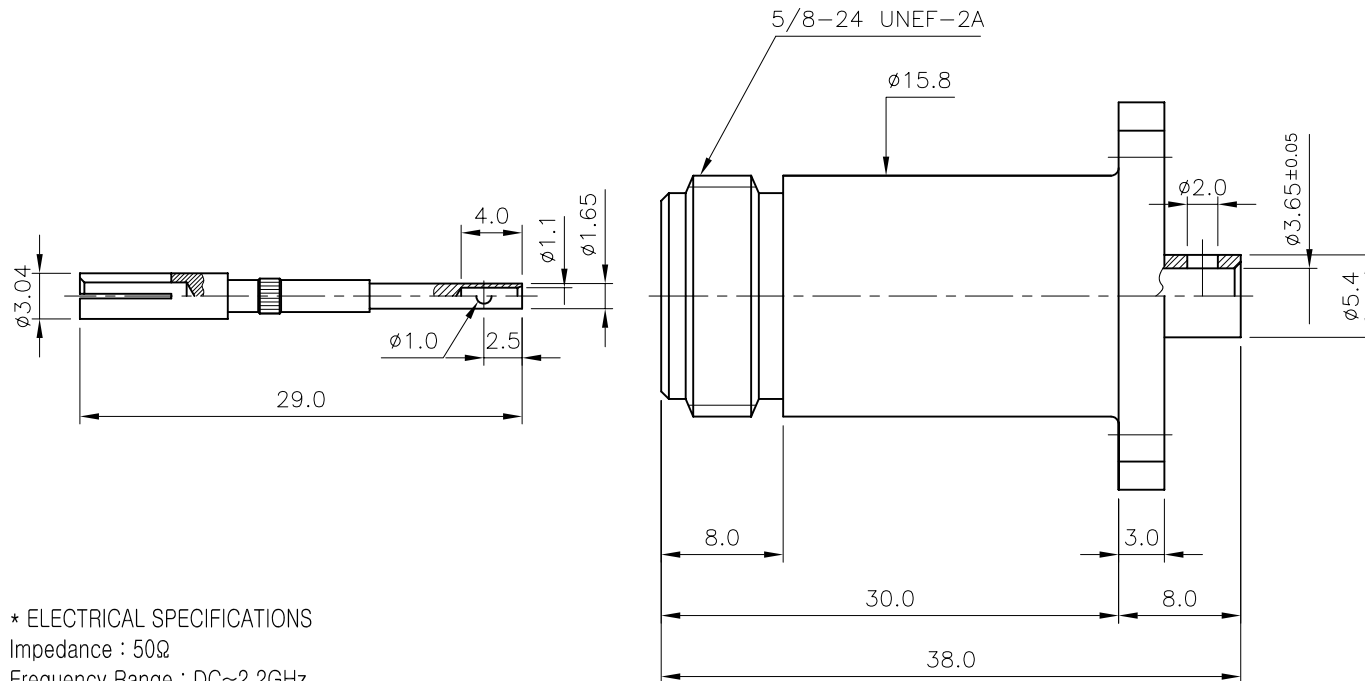

* ELECTRICAL SPECIFICATIONS

Impedance : 50Ω

Frequency Range : DC~2.2GHz

V.S.W.R (MAX) : ≤ 1.07 (1884.5~2170MHz)

PIM(dBm) : ≤ -110 (2x43dBm, 1800MHz, 2100MHz)


Insertion Loss (dB) : ≤ 0.05

Insulation resistance (M Ω) : ≥ 5000

Proof voltage (V) : 1000

Conductor resistance (m Ω) : Outer conductor < 0.4

Inner conductor < 0.8

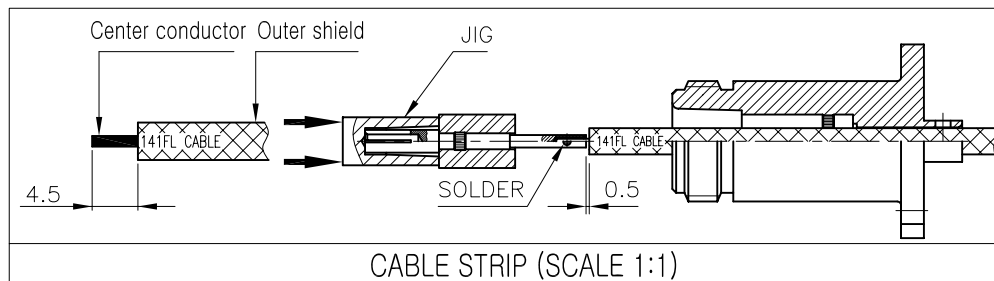

3	INSULATOR	1	PTFE		DIN02108-N/1
2	CONTACT	1	Beryllium copper	Silver Plate (3 μ m)	DCT02717-5/1
1	BODY (A)	1	BRASS	SUCO Plate (5 μ m)	DBD03211-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2012. 12. 05.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY	E.H.KIM	KJ COMTECH CO.,LTD. TITLE N50 CABLE JS-4H 141
		DRAWN BY	I.C.KIM	
FINISH		SCALE	UNIT	A4 DWG NO. CN02862-7/3 REVISION I R SHEET 1 of 1
		2/1	mm	