

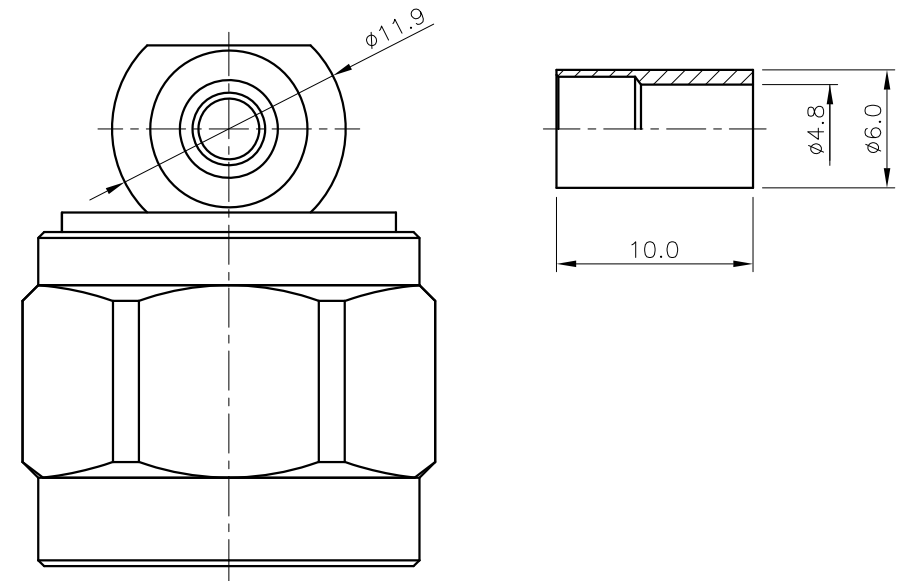


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration	S.H.KIM		2022.10.25

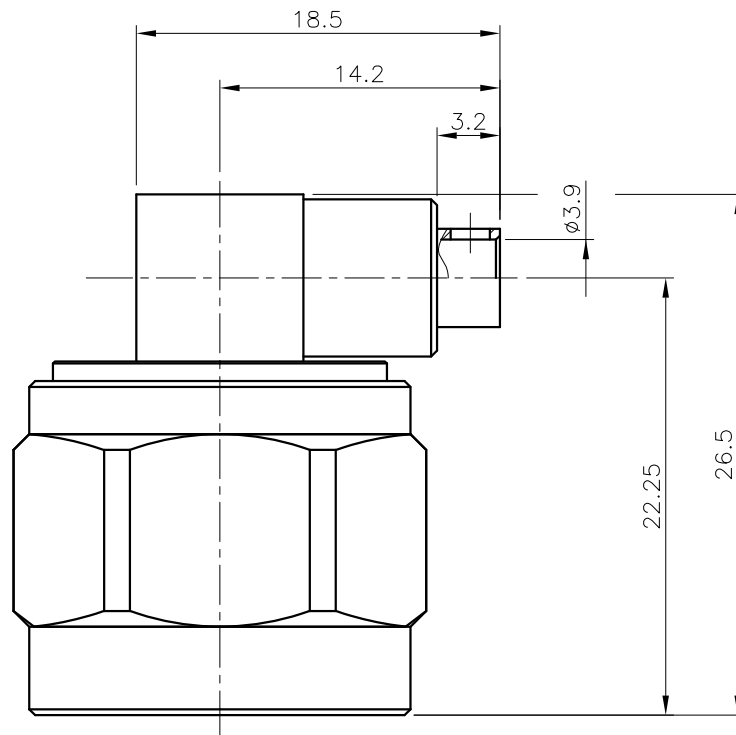

ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~8.5GHz
3. VSWR (Max) : 1.2

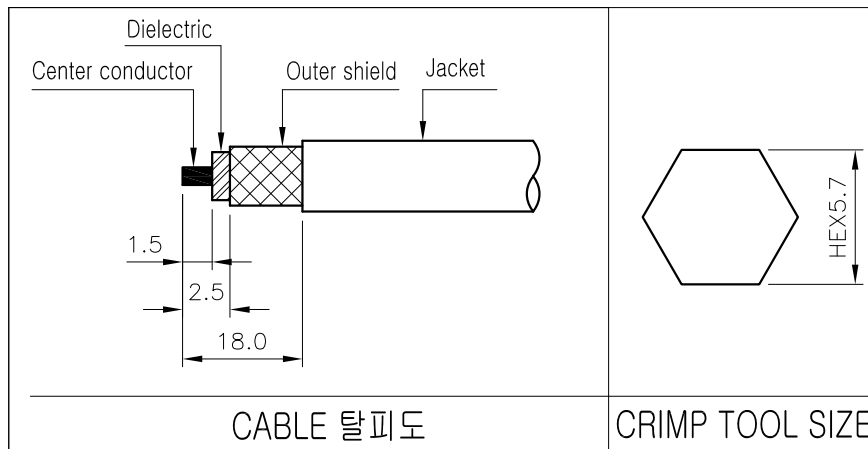

8	SPRING RING	1	PBR	Nickel Plate	DSR00020-5/1	
7	COVER	1	MBsBD C3604BD-F	Nickel Plate	DCO00087-5/1	
6	COUPLING CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00063-5/3	
5	INSULATOR	1	TEFLON		DIN03051-N/3	
4	GASKET	1	SILICONE RUB		DGK00013-N/1	
3	FERRULE	1	MBsBD C3604BD-F	Nickel Plate	DFE00163-5/1	
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT04338-5/1	
1	1-2 BODY	1	MBsBD C3604BD-F	Nickel Plate	DBB00324-5/3	DBD03189-1/3
	1-1 BODY	1	MBsBD C3604BD-F	Nickel Plate		DBD04866-1/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE	

TOLERANCE	Decimal ±0.3	DATE 2022. 10. 25		 KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY		
MATERIAL _____	CHECKED BY			TITLE N50 CABLE PL 141FJ(50Ω)
	DRAWN BY	S.H.KIM		
FINISH _____	SCALE 2.5/1	UNIT mm		DWG NO. CN02889-7/6 REVISION R SHEET 1 of 1