

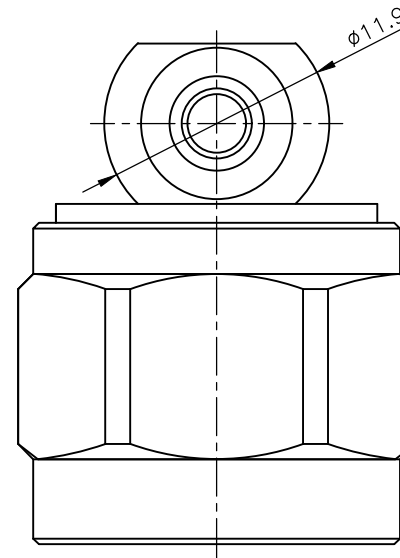


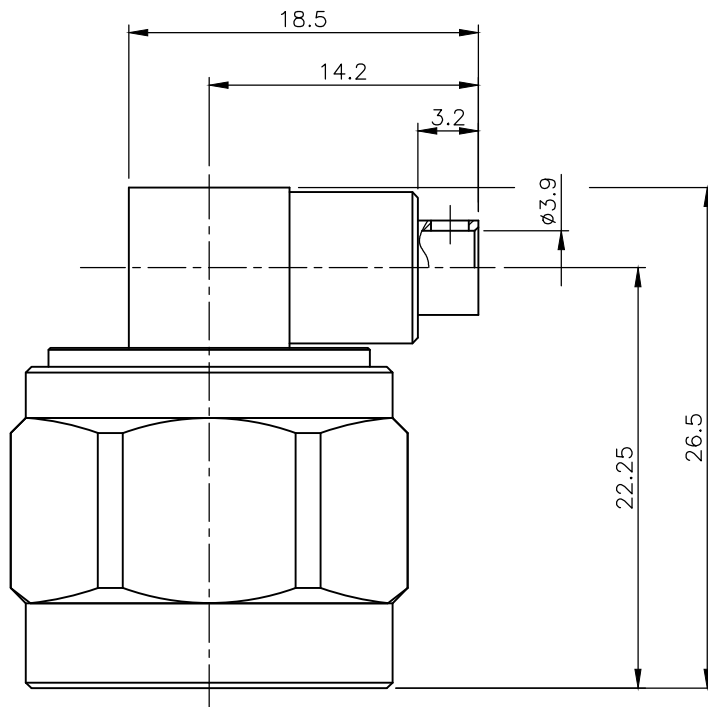

ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~8.5GHz
3. VSWR (Max) : 1.2

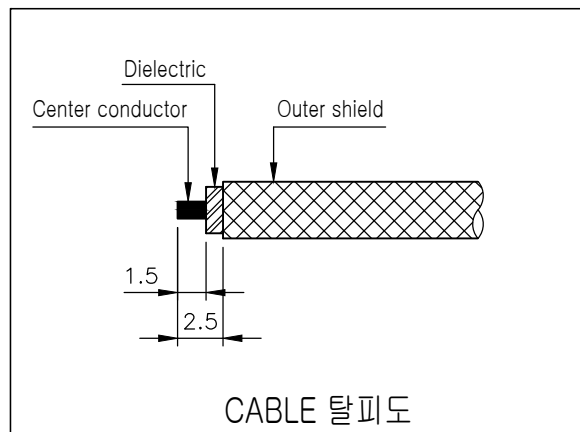

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.H.KIM		2023.07.12.

7	SPRING RING		1	PBR	Nickel Plate	DSR000020-5/1	
6	COVER		1	MBsBD C3604BD-F	Nickel Plate	DCO000087-5/1	
5	COUPLING CAP		1	MBsBD C3604BD-F	Nickel Plate	DCU000063-5/3	
4	INSULATOR		1	TEFLON		DIN03051-N/3	
3	GASKET		1	SILICONE RUB		DGK000013-N/1	
2	CONTACT		1	MBsBD C3604BD-F	Gold Plate	DCT04338-5/1	
1	1-2	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBB00324-5/3	DBD03189-1/3
	1-1	BODY	1	MBsBD C3604BD-F	Nickel Plate		DBD04866-1/1
NO.		DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE	

TOLERANCE	Decimal	DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017				
	±0.3	2023. 07. 12.							
	Angle	APPROVED BY							
MATERIAL	±1°	CHECKED BY				TITLE N50 CABLE PL 141F(50Ω)			
		DRAWN BY	S.H.KIM						
FINISH		SCALE	UNIT		A4	DWG NO.		CN02889-7/9	
		2.5/1	mm			REVISION		I R	SHEET