

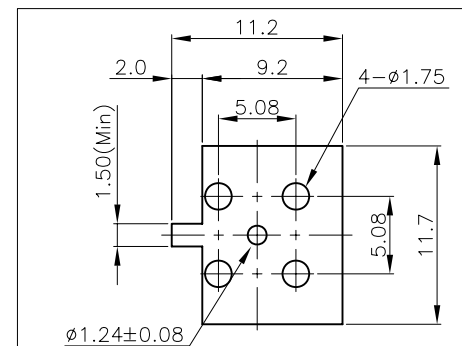
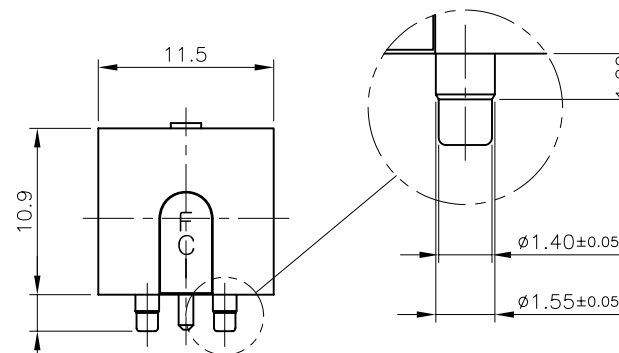
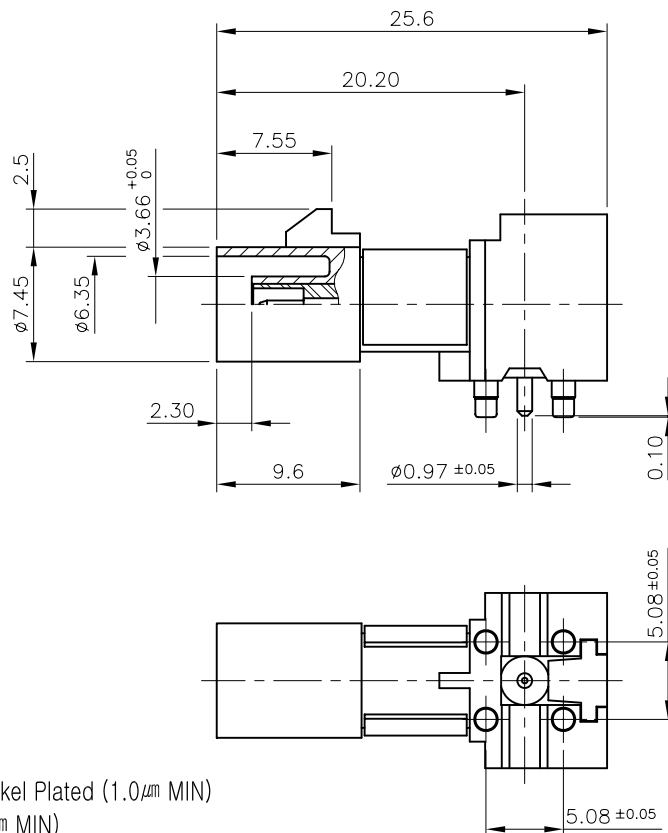
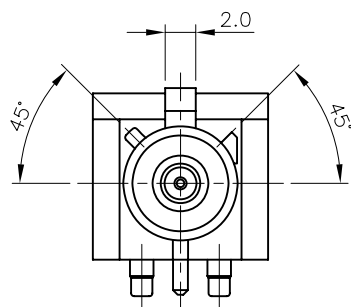


** Keying Type & Color Table

Fig.	
Type	B
Color	SIGNAL WHITE

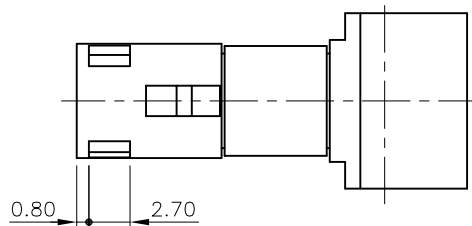

PCB MOUNTING HOLE
Board Area (min) ()

NOTE

1. MATERIALS AND FINISHES

A. BODY, CAP - ZINC Alloy /

Tin Plated (0.8μm MIN), Nickel Plated (1.0μm MIN)

B. CONTACT - BRASS / Gold Plated (0.03μm MIN)

C. INSULATOR - PTFE Teflon

D. COLOR RING - NYLON66

2. ELECTRICAL

A. IMPEDANCE : 50Ω Nominal

B. FREQUENCY RANGE DC ~ 4GHz

C. DIELECTRIC WITHSTANDING VOLTAGE : 1000 VRMS MIN

3. MECHANICAL

A. DURABILITY : 100 CYCLES

B. TEMPERATURE RANGE : -40°C ~ 100°C

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration	I.C.KIM	I.C.KIM	2013.01.02.

TOLERANCE Decimal .X = ±0.2 .XX = ±0.1 Angle ±1°	DATE 2013. 01. 02.		 KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	APPROVED BY	I.C.KIM	
MATERIAL	CHECKED BY	E.H.KIM	TITLE FAKRA-JL-4R-R ("B" TYPE)
	DRAWN BY	I.C.KIM	
FINISH	SCALE	2/1	DWG NO. CN02913-7/1
	UNIT	mm	
			A4
		REVISION	I R
		SHEET	1 of 1