


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration	E.H.KIM	I.C.KIM	2013.02.18.

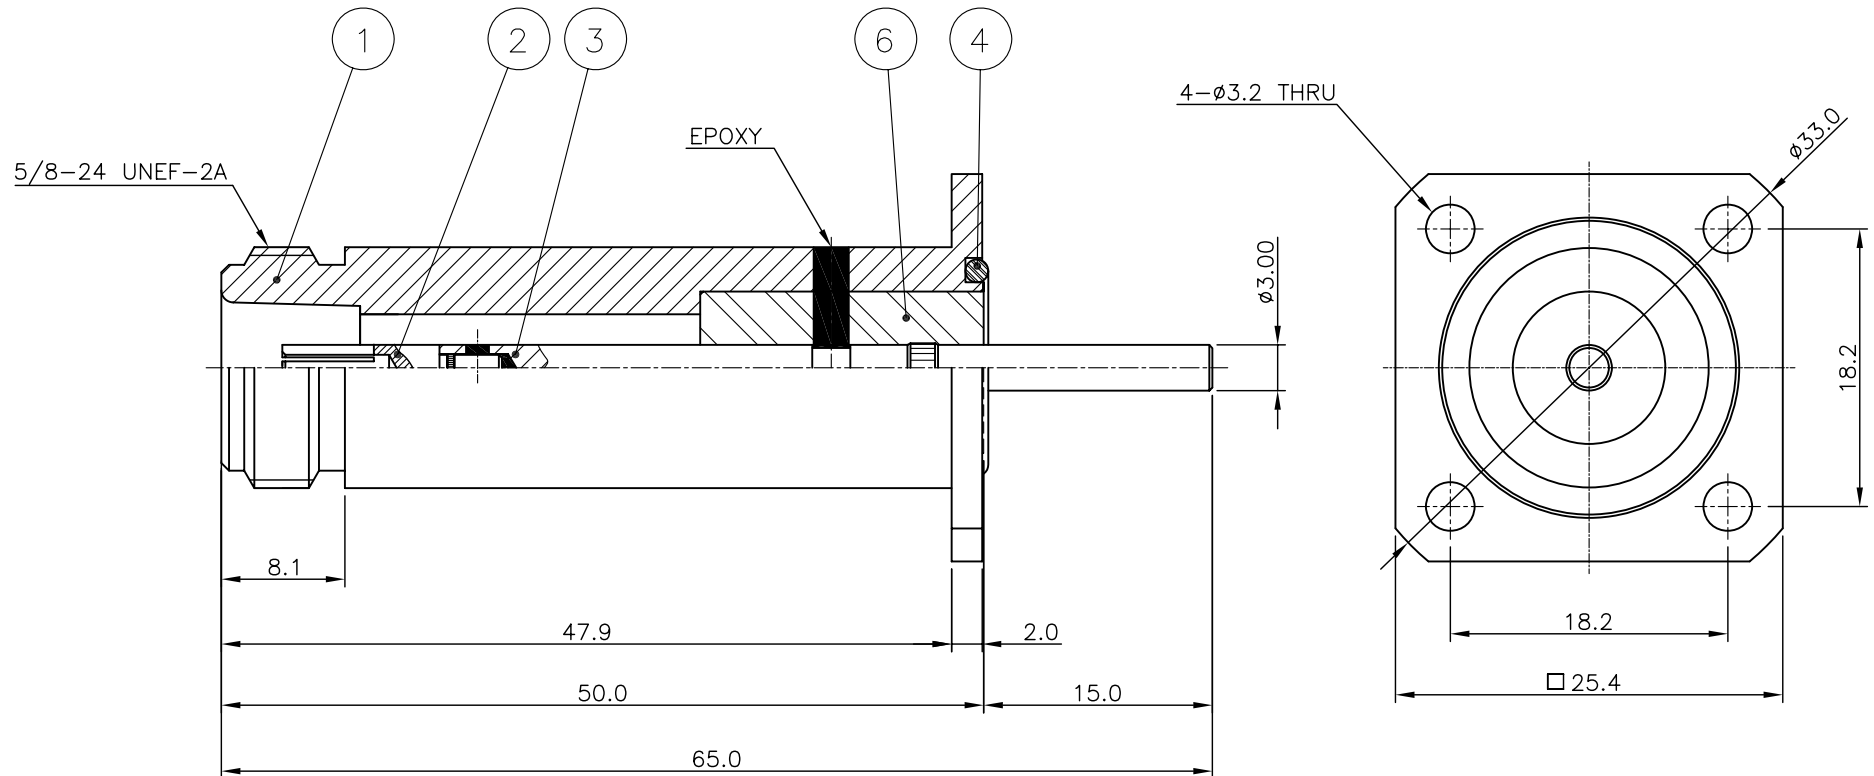

* ELECTRICAL SPECIFICATIONS

Impedance : 50Ω

Frequency Range : DC~3GHz

V.S.W.R (Max) : 1.2

PIMD : 145dBc @ 20W 2tone (CDMA, WCDMA)

5	INSULATOR	1	TEFLON		DIN00648-N/1
4	GASKET	1	SILICONE RUB		DGK00032-N/1
3	CONTACT	1	MBsBD	Silver Plate	DCT02774-5/1
2	CONTACT	1	BeCu	Silver Plate	DCT01575-5/1
1	BODY	1	MBsBD	SUCO Plate (3 μ m)	DBD03266-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2013. 02. 18.			 KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM		
MATERIAL	$\pm 1^{\circ}$	CHECKED BY	TITLE N50 SOLDER END JS-4H		
	_____	DRAWN BY			
FINISH	_____	SCALE 2/1	UNIT mm	 A4	DWG NO. CN02941-7/1
					REVISION I R