
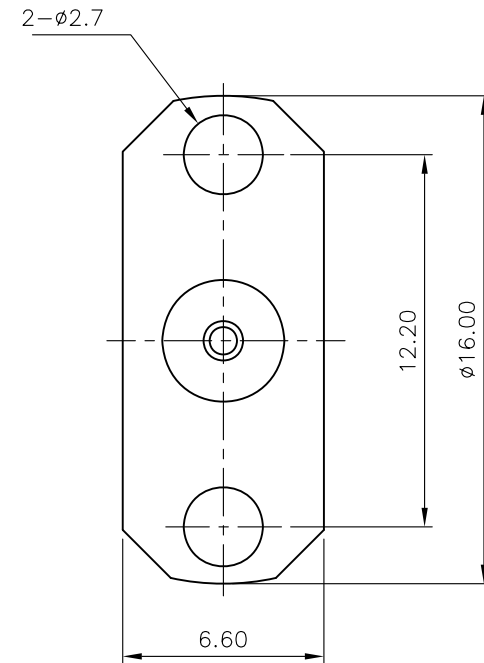


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	M.H.SONG	I.C.KIM	2013.08.07.

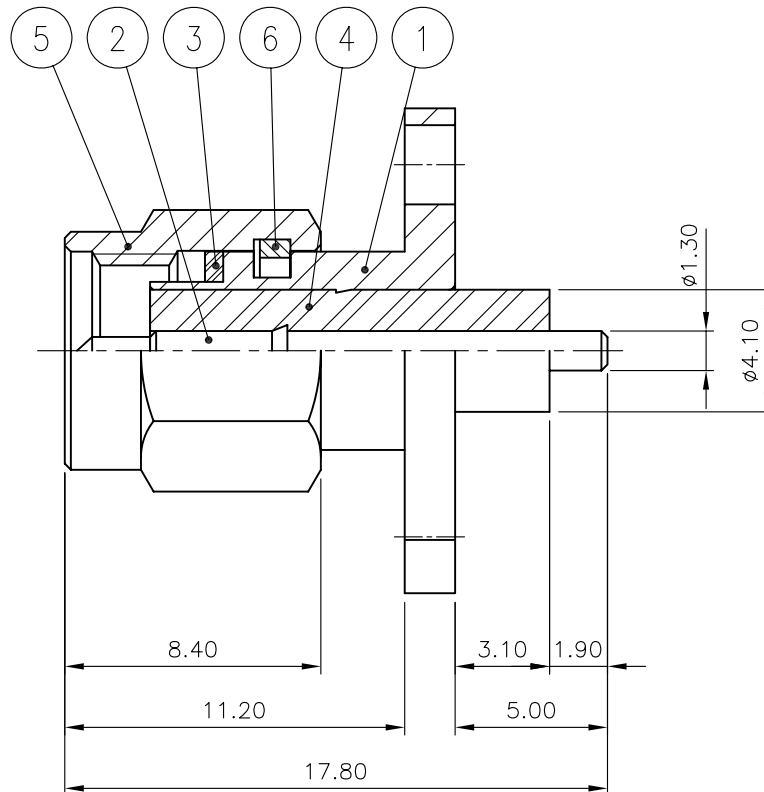

[SPECIFICATIONS]

1. IMPEDANCE: 50 Ohm
2. FREQUENCY RANGE: DC~6GHz
3. VSWR(Max) : 1.05 + 0.03 X F (F:Frequency range)
4. DIELECTRIC WITHSTANDING VOLTAGE: 1500V rms
5. WORKING VOLTAGE: 500V rms
6. INSULATION RESISTANCE: 5000 MOhm Min
7. CONTACT RESISTANCE INNER CONDUCTOR: <3.0m Ohm
8. CONTACT RESISTANCE OUTER CONDUCTOR: <2.5m Ohm
9. DURABILITY: 500 CYCLES
10. TEMPERATURE RANGE : -40°C~+120°C

6	SPRING RING	1	SUS	Passivate	DSR00002-5/1
5	COUPLING CAP	1	MBsBD	Nickel Plate	DCU00005-5/2
4	INSULATOR	1	TEFLON		DIN02222-N/1
3	GASKET	1	SILICONE Rub		DGK00004-N/1
2	CONTACT	1	MBsBD	Gold Plate	DCT02899-5/1
1	BODY	1	MBsBD	Nickel Plate	DBD03403-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2013. 08. 07.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY	E.H.KIM	KJ COMTECH CO.,LTD. TITLE SMA50 SOLDER END PS-4H
		DRAWN BY	M.H.SONG	
FINISH		SCALE	UNIT	A4 DWG NO. CN02989-7/1 REVISION I R SHEET 1 of 1
		4/1	mm	