
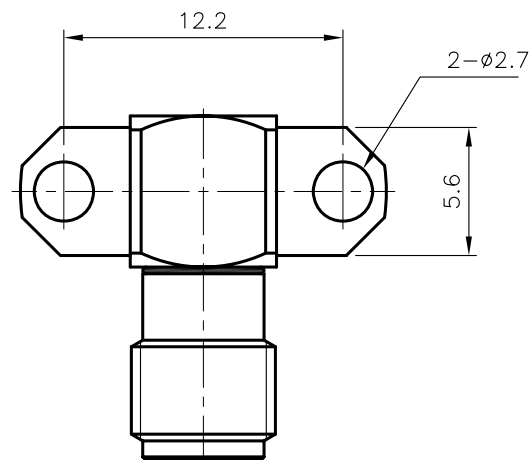


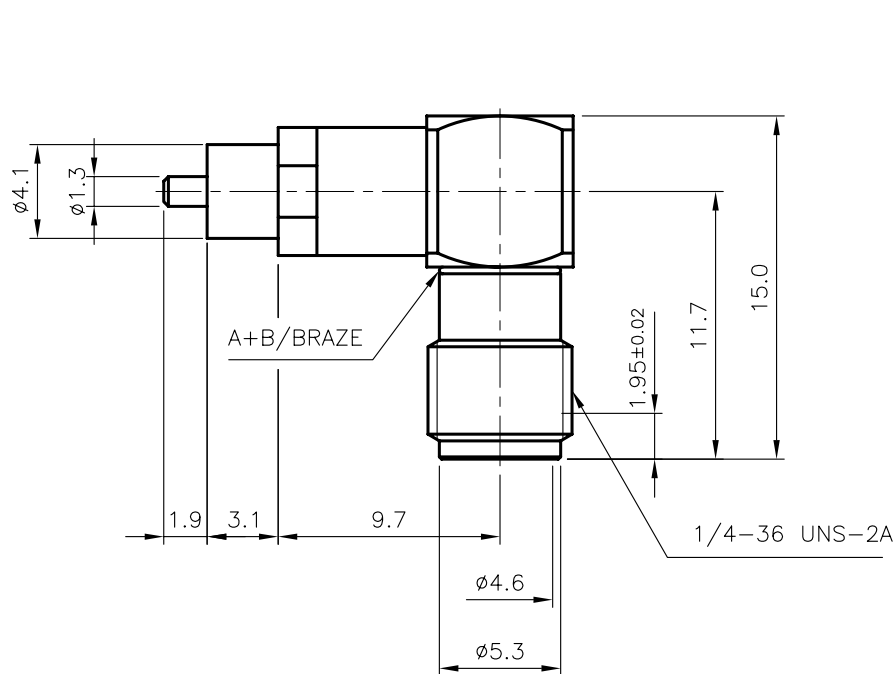

[SPECIFICATIONS]

1. IMPEDANCE: 50 Ohm
2. FREQUENCY RANGE: DC~6GHz
3. VSWR(Max) : 1.05 + 0.03 X F (F:Frequency range)
4. DIELECTRIC WITHSTANDING VOLTAGE: 1500V rms
5. WORKING VOLTAGE: 500V rms
6. INSULATION RESISTANCE: 5000 MOhm Min
7. CONTACT RESISTANCE INNER CONDUCTOR: <3.0m Ohm
8. CONTACT RESISTANCE OUTER CONDUCTOR: <2.5m Ohm
9. DURABILITY: 500 CYCLES
10. TEMPERATURE RANGE : -40°C~+120°C

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	M.H.SONG	I.C.KIM	2013.07.18.
1	[설변No.201901-0004] 납시바늘 추가 및 공용화 치수 적용	S.Y.EUN	I.C.KIM	2019.01.21.
2	[설변No.202111-0005] A+B/은땜 공용화 치수 적용	S.Y.EUN	I.C.KIM	2021.11.11.

3	6	COVER	1	MBsBD C3604BD-F	Nickel Plate	DCO00042-5/4 DCO00042-5/3
	5	INSULATOR	1	TEFLON		DIN00112-N/1
1	4	INSULATOR	1	TEFLON		DIN02206-N/1
	3	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT02876-5/1
2	2	CONTACT	1	BeCu C17300	Gold Plate	DCT00151-5/1
	1-2	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD00206-1/4 DBD00206-1/4
	1-1	BODY	1	MBsBD C3604BD-F		DBD00072-5/2 DBD00223-1/4 DBD00223-1/4

TOLERANCE	Decimal	DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	± 0.2	2021. 11. 11.					
	Angle	APPROVED BY	I.C.KIM		KJ COMTECH CO.,LTD.		
$\pm 1^{\circ}$	CHECKED BY						
MATERIAL		DRAWN BY		S.Y.EUN		TITLE	
						SMA50 SOLDER END JL-2H	
FINISH		SCALE	UNIT		A4	DWG NO.	CN03029-7/1
		3/1	mm			REVISION	3