

ELECTRICAL DATA :



1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~3GHz
3. VSWR (Max) : 1.2
4. DIELECTRIC WITHSTANDING VOLTAGE : 750 V RMS
5. CENTER CONTACT RESISTANCE : $\leq 5.0\text{m}\Omega$
6. OUTER CONTACT RESISTANCE : $\leq 1.0\text{m}\Omega$

ENVIRONMENTAL DATA:

1. TEMPERATURE RANGE : $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2021. 06. 08.

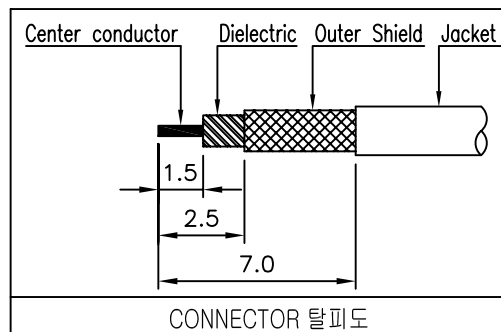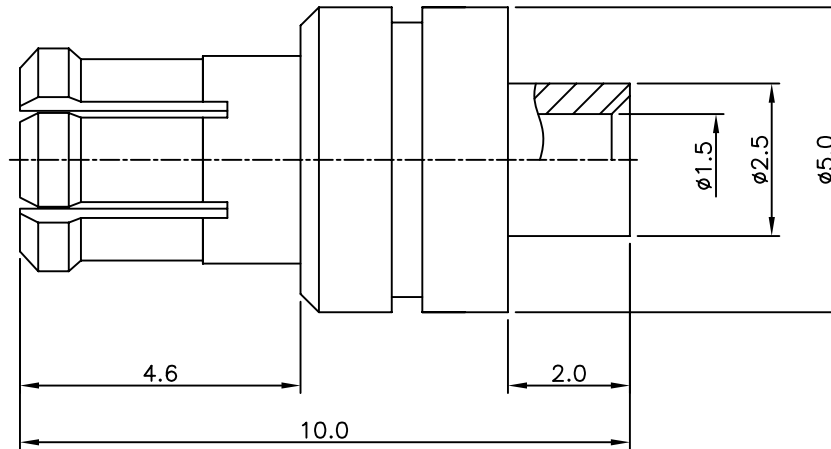

3	INSULATOR	1	TEFLON		DIN03226-N/1
2	CONACT	1	MBsBD C3604BD-F	Gold Plate	DCT03250-5/1
1	BODY	1	BeCu C17300	Gold Plate	DBD03748-5/3
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.1	DATE 2021. 06. 08.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	I.C.KIM		
MATERIAL -		CHECKED BY	TITLE MCX50 CABLE PS 47TP		
		DRAWN BY			
FINISH -		SCALE 8/1	UNIT mm		A4
		REVISION I R		SHEET 1 of 1	