
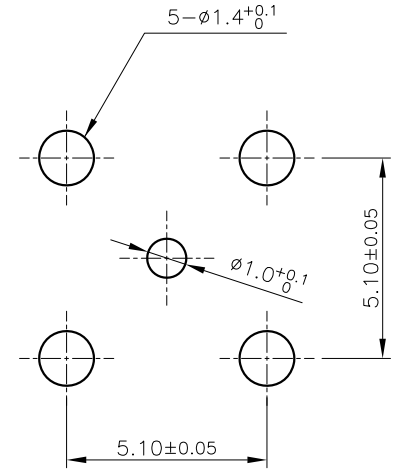
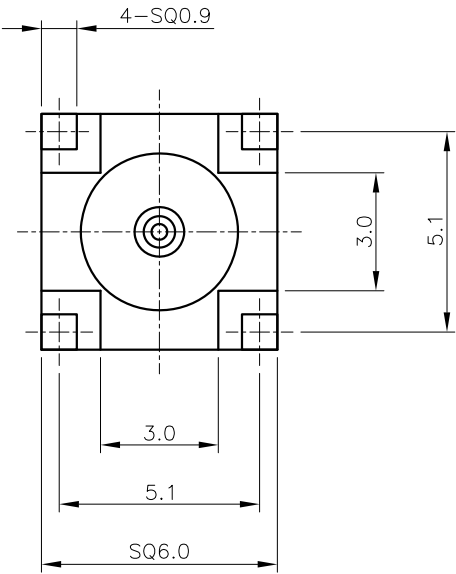


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1 R	Initial Registration	S.H.KIM		2024.11.12.

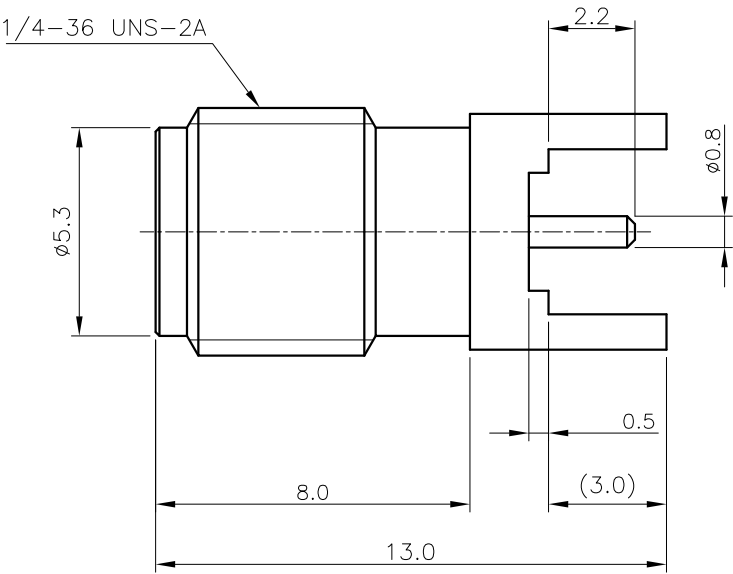

PCB MOUNTING HOLE

- ELECTRICAL DATA :
- 1. IMPEDANCE : 50Ω
 - 2. FREQUENCY RANGE : DC~8GHz
 - 3. VSWR (Max) : 1.2
 - 4. DIELECTRIC WITHSTANDING VOLTAGE : 750 V RMS Min.
 - 5. INSULATION RESISTANCE : 5000MΩ
 - 6. CENTER CONTACT RESISTANCE : ≤ 3mΩ
 - 7. OUTER CONTACT RESISTANCE : ≤ 2.5mΩ

3	INSULATOR	1	TEFLON		DIN00090-N/1
2	CONTACT	1	BeCu C17300	Gold Plate	DCT04452-5/1
1	BODY	1	MBsBD C3604BD-F	Gold Plate	DBD03903-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.2	DATE 2024. 11. 12.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		
	Angle ±1°	APPROVED BY					
MATERIAL -		CHECKED BY			TITLE SMA50 PCB JS-4R		
		DRAWN BY S.H.KIM					
FINISH -		SCALE 5/1	UNIT mm		A4	PART NO. CN03310-7/3	
						REVISION	I R