

A

B

C

D


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration	C.K.KIM	I.C.KIM	2016.08.23.
1	전장 길이 및 SOLDER 부 외경 치수 변경	I.C.KIM		2018.12.20.
2	[설번처리No.202108-0002]조립성 및 CAP 걸림현상 개선	I.C.KIM		2021.08.27.
3	[설번처리No.202204-0001]바디 납땜HOLE 제거 - SHORT 불량 방지 개선	S.H.KIM		2022.04.13.

A

B

C

D

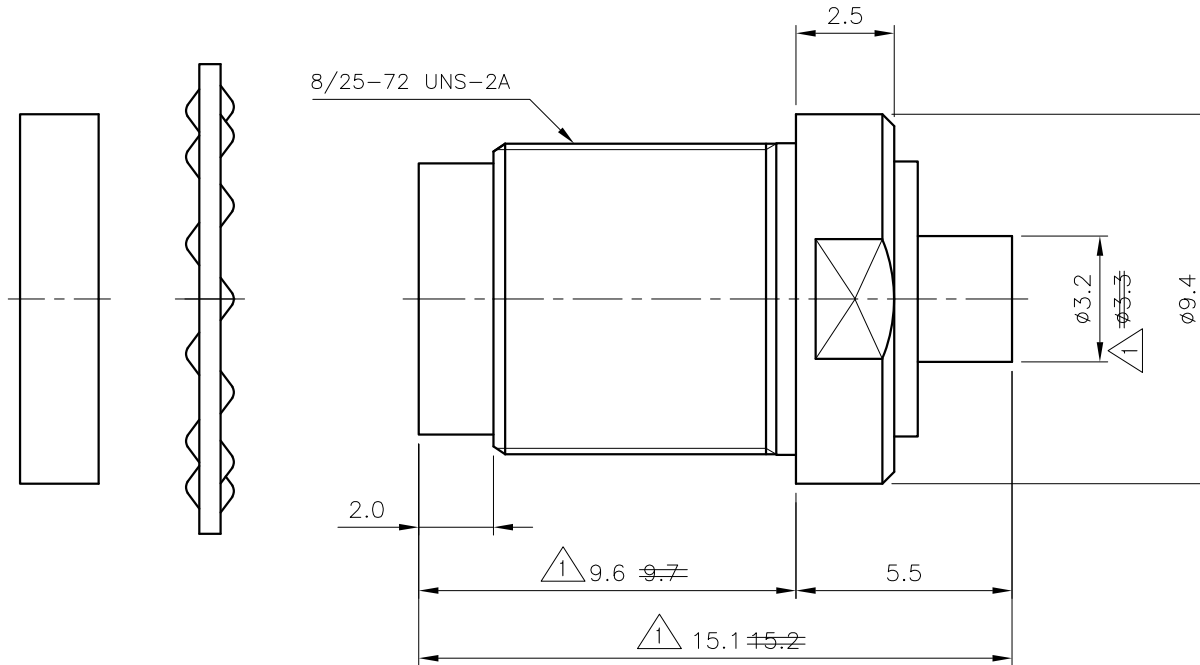

*삽/이탈력 (상대물 핀 Ø0.92기준)

- 삽입력 : 0.4~1.4kgf

- 이탈력 : 0.2~0.7kgf

10	NUT	1	MBsBD C3604BD-F	Nickel Plate	DNT00096-5/1
9	WASHER	1	SUS	Passivate	DWA00133-5/1
8	E형 멈춤링	1	SUS	Passivate	DSR01128-5/1
7	PLATE SPRING	1	BeCu C17300	Gold Plate	DPS00002-5/1
6	SPRING	1	SUS	Passivate	DSR01129-5/1
5	INSULATOR	1	TEFLON		DIN02820-N/1
4	COVER	1	MBsBD C3604BD-F	Gold Plate	DIB00026-5/1
3	CONTACT	1	BeCu C17300	Gold Plate (1.27μm)	DCT03747-5/2 DCT03747-5/1
2	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD04214-5/3 DBD04214-5/2
1	BODY	1	MBsBD C3604BD-F	Gold Plate	DBD04213-5/3 DBD04213-5/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.1	DATE 2022. 04. 13.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY			
MATERIAL _____	CHECKED BY			TITLE BMA50 CABLE JB(F/N) 85F	
	DRAWN BY S.H.KIM				
FINISH _____	SCALE 5/1	UNIT mm		A4	DWG NO. CN03374-7/2
					REVISION 3