




*플랜지 2H 좌측커팅

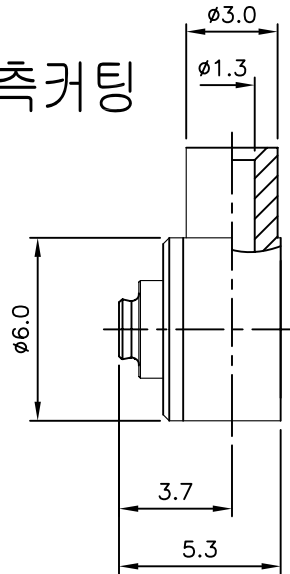

■레이저 각인 위치
(각인JIG : DEQ01188-2/6)

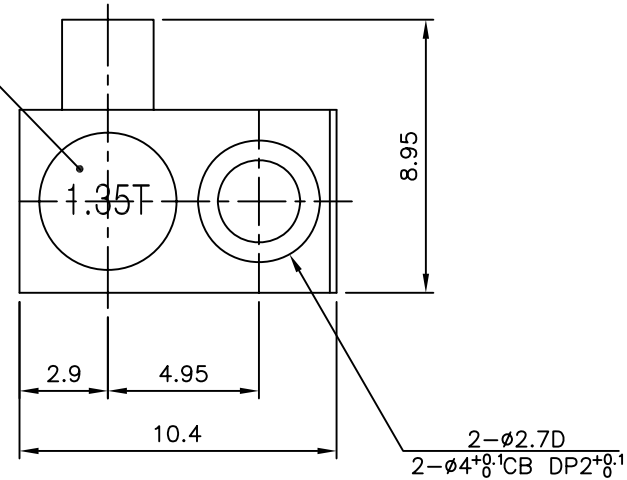

* 삼이탈력 확인 (KMS-156) - 상대물 체결
-삽입력 : 1.0~1.3Kgf
-이탈력 : 0.6~0.9Kgf

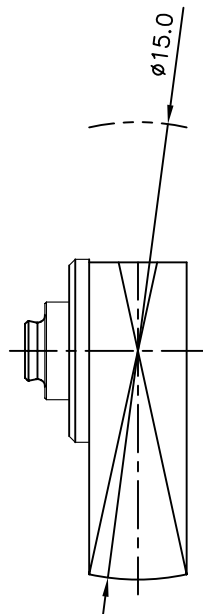

5	COVER	1	MBsBD C3604BD-F	Nickel Plate	DCO00020-5/2
4	INSULATOR	1	TEFLON		DIN00921-N/1
3	INSULATOR	1	TEFLON		DIN02565-N/2
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT03436-5/2 DCT03436-5/4 DCT03436-5/3
1-2	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD03906-3/7
1-1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD03905-3/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.2 Angle ±1°	DATE 2019. 10. 11.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
MATERIAL	—	APPROVED BY I.C.KIM			
FINISH	—	CHECKED BY	TITLE KMS156 CABLE JL-2H		
		DRAWN BY S.Y.EUN	RF-ø1.37		
		SCALE 4/1	UNIT mm	DWG NO. CN03404-7/5	
				REVISION 2	SHEET 1 of 1

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2019.06.04.
1	[설변No.201909-0005] 작업성 개선으로 인한 핀 변경	S.Y.EUN	I.C.KIM	2019.09.23.
2	[설변No.201910-0001] 특성 개선으로 인한 핀 변경	S.Y.EUN	I.C.KIM	2019.10.11.