

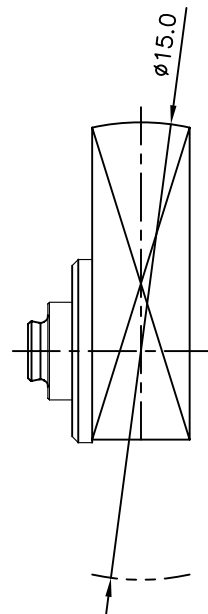


*플랜지 2H 우측커팅

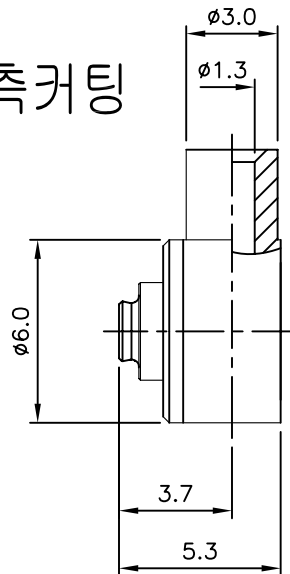

2- $\phi 2.7D^{+0.1}_{-0}$
2- $\phi 4^{+0.1}_{-0}$ CB DP2

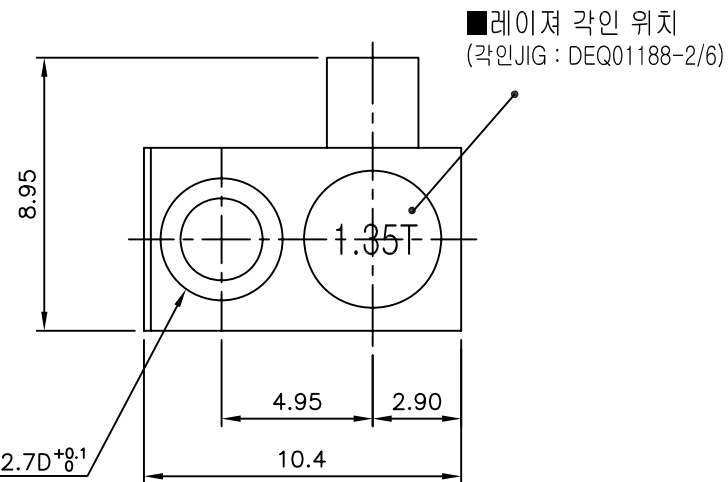

* 삼이탈력 확인 (KMS-156) - 상대물 체결

-삽입력 : 1.0~1.3Kgf

-이탈력 : 0.6~0.9Kgf

※ 핀높이 별도 표시 A 참조 ※



TOLERANCE	Decimal	DATE 2019. 10. 11.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL	_____	CHECKED BY		TITLE KMS156 CABLE JL-2H RF- $\phi 1.37$
		DRAWN BY	S.Y.EUN	
FINISH	_____	SCALE	4/1	 A4 DWG NO. CN03404-7/6 REVISION 2 SHEET 1 of 1
		UNIT	mm	

5	COVER	1	MBsBD C3604BD-F	Nickel Plate	DCO00020-5/2
4	INSULATOR	1	TEFLON		DIN00921-N/1
3	INSULATOR	1	TEFLON		DIN02565-N/2
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT03436-5/2 DCT03436-5/4 DCT03436-5/3
1	1-2 BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD03906-3/8
	1-1 BODY	1			DBD03905-3/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2019.06.04.
1	[설번No.201909-0005] 작업성 개선으로 인한 핀 변경	S.Y.EUN	I.C.KIM	2019.09.23.
2	[설번No.201910-0001] 특성 개선으로 인한 핀 변경	S.Y.EUN	I.C.KIM	2019.10.11.