





* ②번 부품 커팅 방향 맞게 조립 할 것

* 삽입력 확인 (MS-180) - 상대물 체결

-삽입력 : 1.1~1.6Kgf

-이탈력 : 0.5~0.7Kgf

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	H.J.LEE	I.C.KIM	2015.05.14.

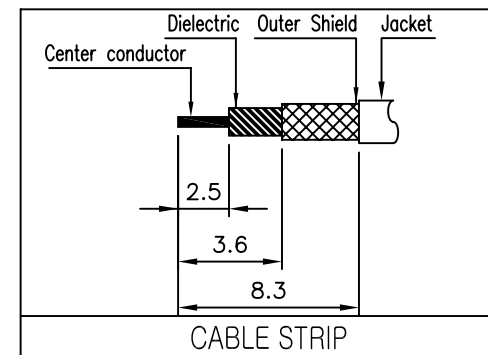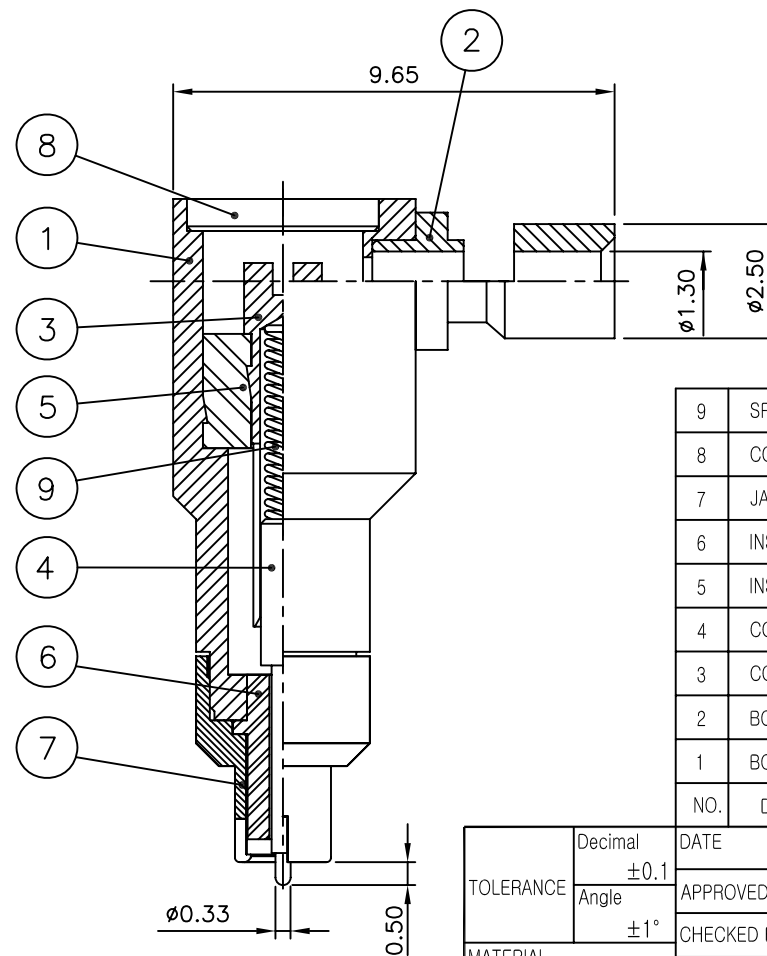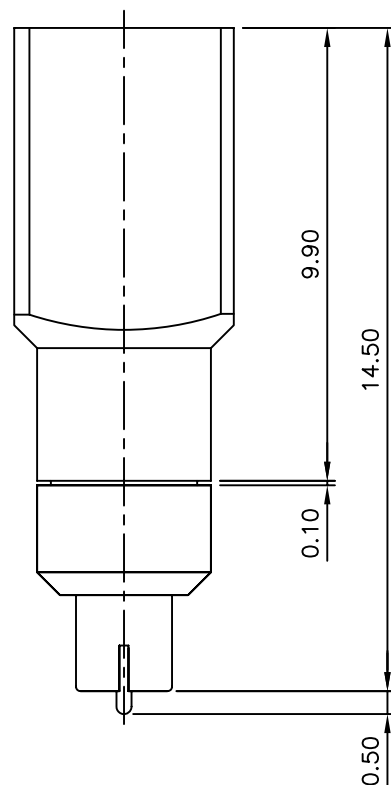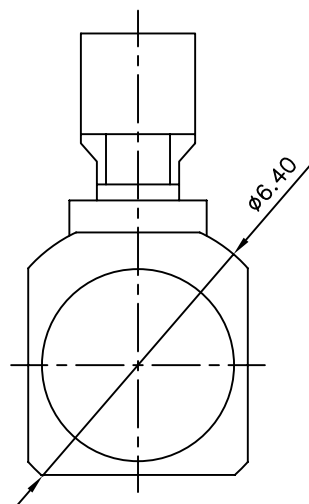

9	SPRING	1	SUS303	Passivated	DSR01135-N/1
8	COVER	1	MBsBD C3604BD-F	Nickel Plate	DCO00016-5/2
7	JACK	1	BeCu C17300	Gold Plate	DJA00219-5/1
6	INSULATOR	1	TEFLON		DIN02596-N/1
5	INSULATOR	1	TEFLON		DIN02595-N/1
4	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT03488-5/1
3	CONTACT	1	BeCu C17300	Gold Plate	DCT03489-5/1
2	BODY	1	MBsBD C3604BD-F	Gold Plate	DBD03940-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD03939-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2015. 05. 14.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY	S.M.LEE	TITLE MS-180 CABLE PL MCB (#59-Ø1.13)
		DRAWN BY	H.J.LEE	
FINISH		SCALE	UNIT	DWG NO. CN03426-7/1 REVISION I R SHEET 1 of 1
		6/1	mm	