
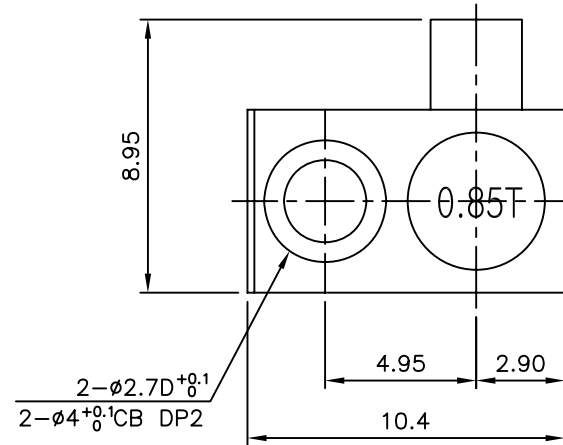



* 삽이탈력 확인 (KMS-180) - 상대물 체결

-삽입력 : 0.6~1.0Kgf


-이탈력 : 0.5~0.9Kgf

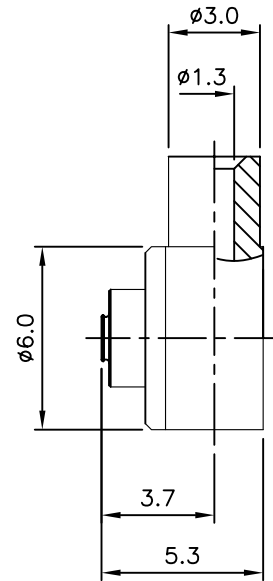

*플랜지 2H 우측커팅



②, ③ CONNECTOR CABLE 탈피도

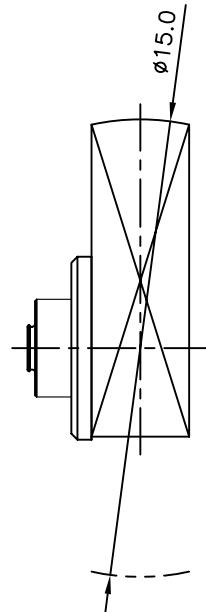

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019.09.20.

5	COVER	1	MBsBD C3604BD-F	Nickel Plate	DCO00020-5/2
4	INSULATOR	1	TEFLON		DIN00921-N/1
3	INSULATOR	1	TEFLON		DIN03049-N/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT03492-5/3
1	1-2 BODY	1	MBsBD C3604BD-F	Nickel Plate	DBB00416-3/5
	1-1 BODY	1	SUS	Nickel Plate	DBD03947-5/4
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2019. 09. 20.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE KMS-180 CABLE JL-2H RF-01.37
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	4/1	DWG NO. CN03429-7/5 REVISION I R SHEET 1 of 1
		UNIT	mm	