

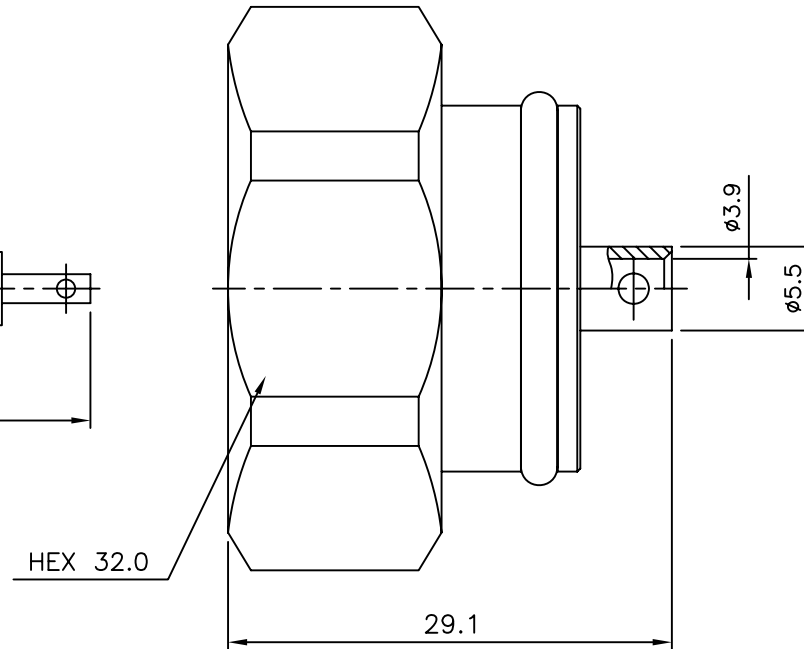
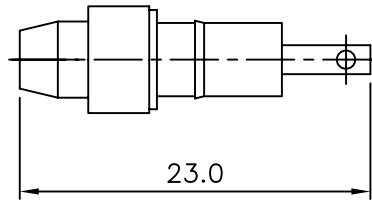



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2017.07.25.



*ELECTRICAL SPEC

1. Frequency Range : DC ~ 3GHz
2. Impedance : 50Ω (Nominal)
3. V.S.W.R.(Max) : 1.2
4. PIMD : -160dBc (20Wx2Tone)
[CDMA / WCDMA 장비 기준]

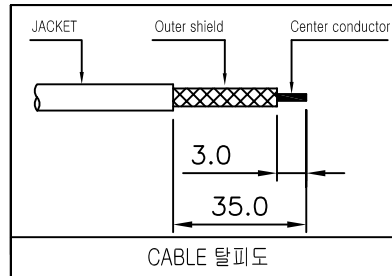

6	COUPLING CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU02266-5/3
5	INSULATOR	1	TEFLON		DIN02644-N/2
4	GASKET	2	SILICONE RUB		DGK00054-N/1
3	FERRULE	1	MBsBD C3604BD-F	Nickel Plate	DFE00205-5/1
2	CONTACT	1	MBsBD C3604BD-F	Silver Plate (5μm)	DCT03543-5/3
1	BODY	1	MBsBD C3604BD-F	SUCO Plate (3μm)	DBD03997-5/5
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2017. 07. 25.	
	Angle	APPROVED BY	I.C.KIM
MATERIAL		CHECKED BY	
		DRAWN BY	S.Y.EUN
FINISH		SCALE	UNIT
		2/1	mm



RF & MICROWAVE
TECHNOLOGY
Tel : 82-32-347-8015
Fax : 82-32-347-8017

TITLE 7/16 DIN50 CABLE PS 141FJ/141MF			
DWG NO. CN03466-7/4		SHEET 1 of 1	
REVISION	I R		

A4