
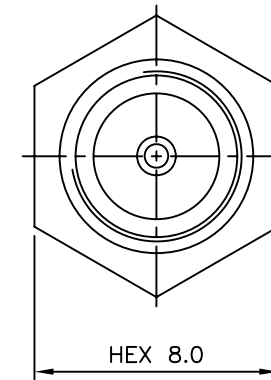


REVISION					
REV	DESCRIPTION	DRAWN	APPR	DATE	
IR	Initial Registration	H.J.LEE	I.C.KIM	2015.08.17	
1	[설변No.201806-0002] QMA 표준화 치수 변경	S.Y.EUN	I.C.KIM	2018.06.07	

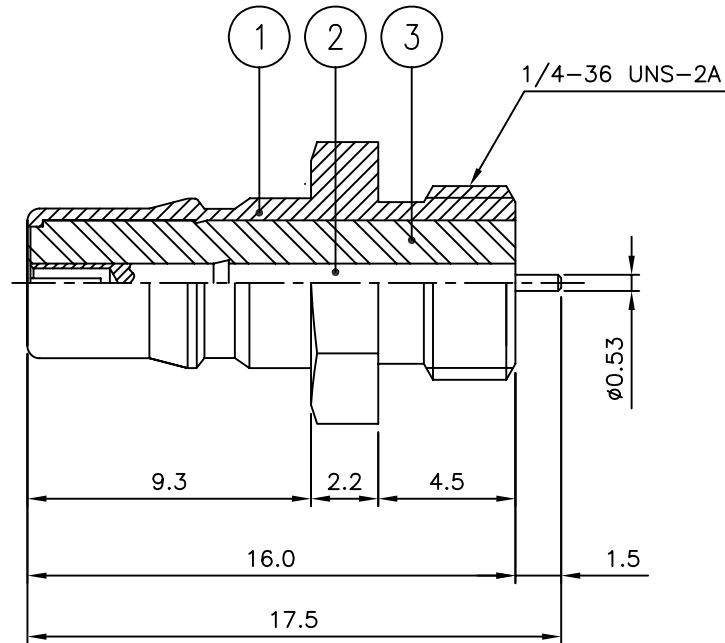

* ELECTRICAL SPECIFICATIONS

- Frequency Range : DC~3GHz
- Impedance : 50Ω(Nominal)
- VSWR(Max) : 1.2
- Insulation resistance : $\geq 5000M\Omega$
- Center contact resistance : $\leq 3m\Omega$
- Outer contact resistance : $\leq 2.5m\Omega$
- Dielectric withstanding voltage : 750V
- Operating temperature : $-40^{\circ}C \sim +85^{\circ}C$
- This connector is complied with ROHS requirement.

3	INSULATOR	1	TEFLON		DIN02643-N/1
2	CONTACT	1	BeCu C17300	Gold Plate	DCT03549-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD04005-5/2 DBD04005-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2018. 06. 07.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE KQMA50 SOLDER END JB
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	4/1	DWG NO. CN03473-7/2 REVISION 1 SHEET 1 of 1
		UNIT	mm	