





1 2 3 4 5 6

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.M.LEE	I.C.KIM	2015.10.20.



CABLE 탈피도

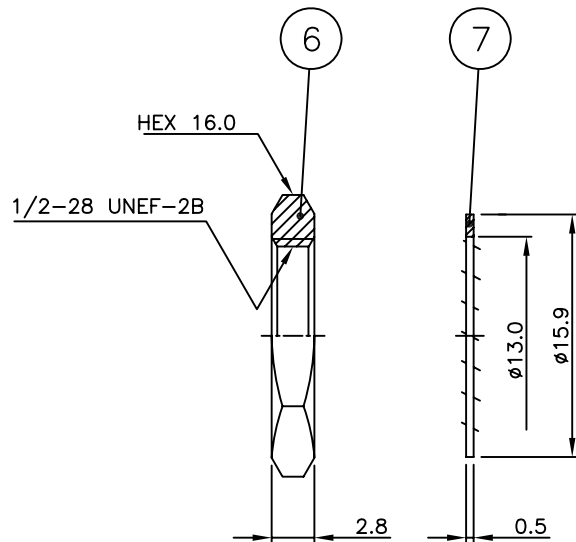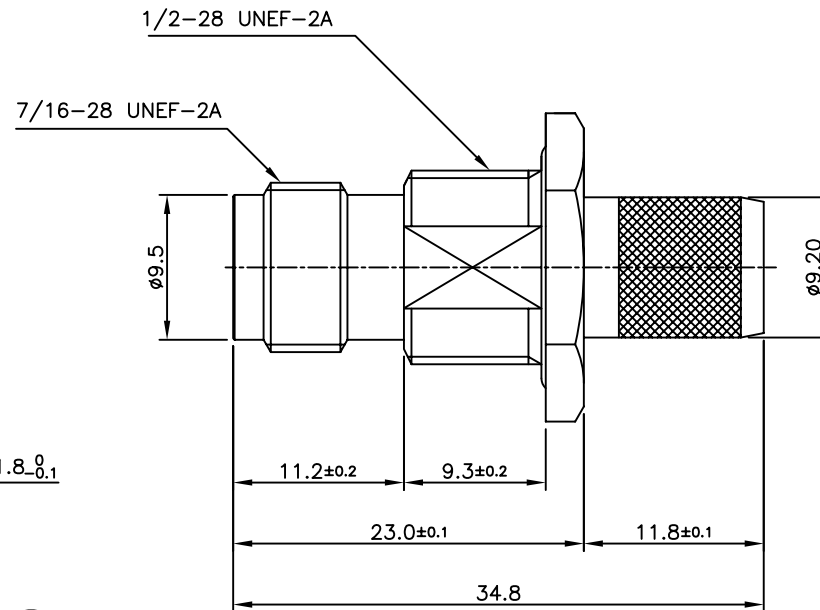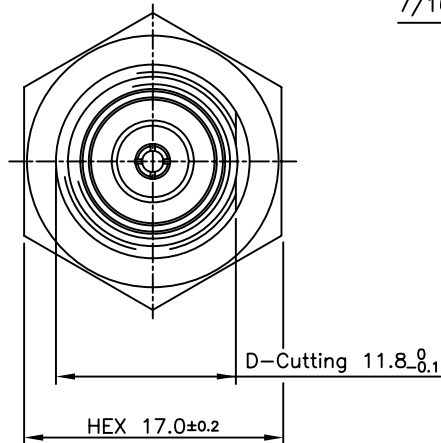

* 도금은 이원합금(BODY, NUT, WASHER)이며,
염수분무 720시간을 만족함

7	WASHER	1	BsS C2680	이원합금 (Ni/TIN)	DWA00022-5/4
6	NUT	1	MBsBD C3604BD-F	이원합금 (Ni/TIN)	DNT00020-5/4
5	FERRULE	1	MBsBD C3604BD-F	Nickel Plate	DFF00070-5/1
4	GASKET	1	SILICONE RUB		DGK00036-N/1
3	INSULATOR	1	PTFE		DIN02670-N/1
2	CONTACT	1	BeCu C17300	Gold Plate	DCT03575-5/1
1	BODY	1	MBsBD C3604BD-F	이원합금 (Ni/TIN)	DBD04047-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2015. 10. 20.	
	Angle	APPROVED BY	I.C.KIM
MATERIAL	±1°	CHECKED BY	H.J.LEE
	-	DRAWN BY	S.M.LEE
FINISH	-	SCALE	UNIT
	-	2/1	mm



RF & MICROWAVE
TECHNOLOGY
Tel : 82-32-347-8015
Fax : 82-32-347-8017

TITLE		TNC50 CABLE JB (F/N) LMR400	
A4	DWG NO.	CN03497-7/1	
	REVISION	IR	SHEET 1 of 1

1 2 3 4 5 6