
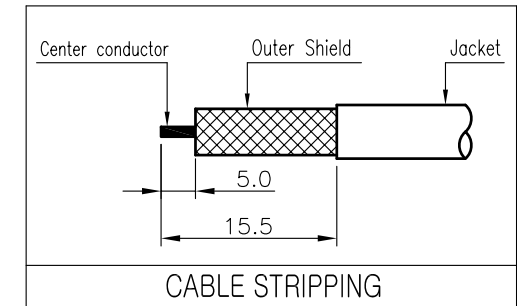


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	H.J.LEE	I.C.KIM	2016.03.11.
1	[실변처리 No.201803-0008] 상대품 체결시 가스켓 누림현상 없음 -바디,캡 수정	S.Y.EUN	I.C.KIM	2018.04.02.

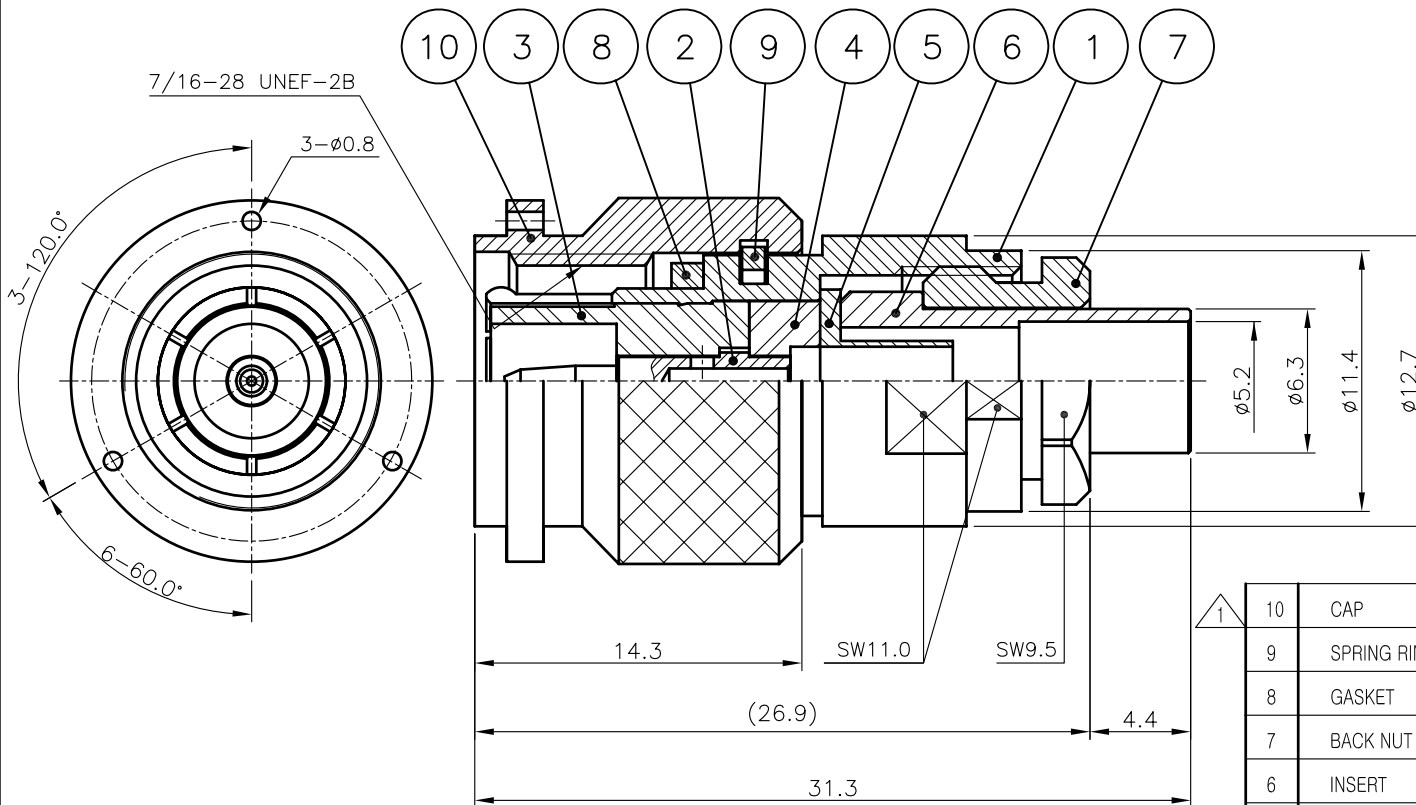

Applicable Standards : MIL-STD 348 / MIL-PRF-39012

ENVIRONMENTAL DATA:

1. TEMPERATURE RANGE : -40°C ~ +150°C

ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~6GHz
3. VSWR (Max) : 1.2
4. INSULATION RESISTANCE : 5000MΩ
5. CENTER CONTACT RESISTANCE : ≤ 1.5mΩ
6. OUTER CONTACT RESISTANCE : ≤ 1mΩ
7. Voltage Rating : 500 VRMS

10	CAP	1	MBsBD C3604BD-F	Gold Plated	DCU02276-5/2 DCU02276-5/1
9	SPRING RING	1	SUS	Passivated	DSR00024-5/1
8	GASKET	1	SILICON RUB		DGK00008-N/1
7	BACK NUT	1	MBsBD C3604BD-F	Gold Plated	DBN00205-5/1
6	INSERT	1	MBsBD C3604BD-F	Gold Plated	DIS00249-5/1
5	INSERT	1	MBsBD C3604BD-F	Gold Plated	DIS00248-5/1
4	INSULATOR	1	TEFLON		DIN02736-N/1
3	INSULATOR	1	TEFLON		DIN02735-N/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plated	DCT03660-5/1
1	BODY	1	MBsBD C3604BD-F	Gold Plated	DBD04131-5/2 DBD04131-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2018. 04. 02.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE TNC50 CABLE PS RG142
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	3/1	A4 DWG NO. CN03575-7/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	