
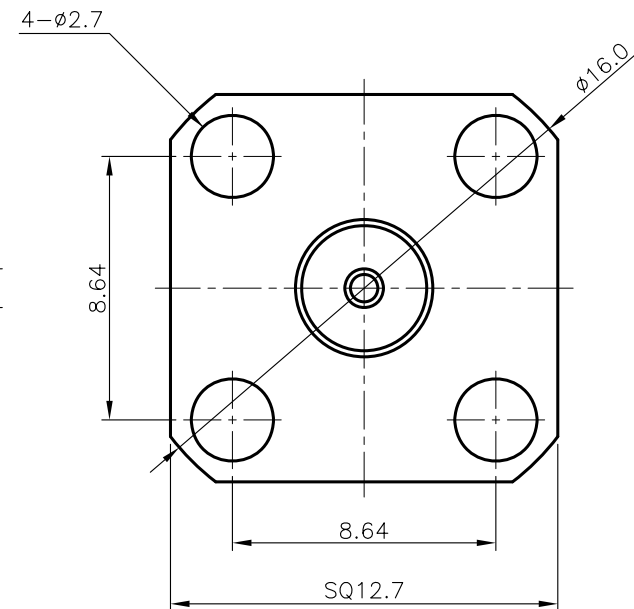


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	H.J.LEE	I.C.KIM	2016.12.08.
1	BODY 중복 코드로 인해 구성 코드 변경	S.H.KIM		2022.03.18.

1/4-36 UNS-2A

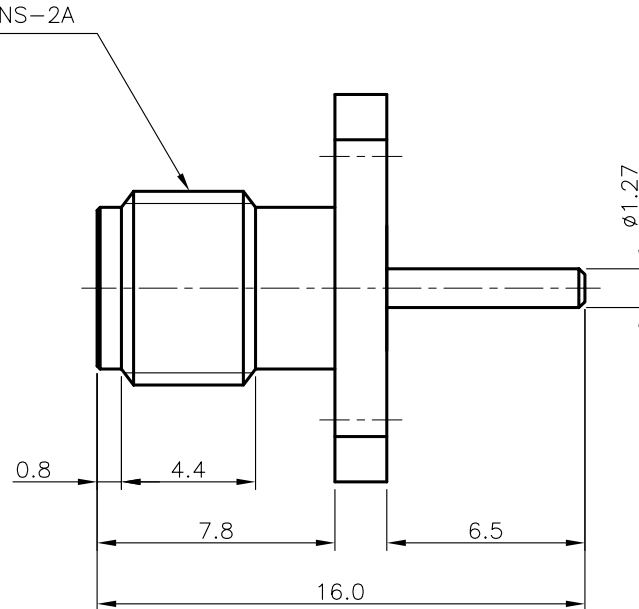

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES

2-1. SMA JS 4H---▶▷BODY : Gold Plate
CONTACT : Gold Plate
INSULATOR : TEFLON

*Electrical Spec

1. Frequency range : DC ~ 8GHz
2. Impedance : 50Ω (Nominal)
3. V.S.W.R (MAX) :1.2
4. Insertion loss (MIN) : -0.2dB
5. Insulation resistance : 5000MΩ
6. Dielectric withstanding : 750Vrms

*Mechanical Spec

Coupling nut toraue : 0.8Nm ~ 1.1Nm

3	INSULATOR	1	TEFLON		DIN00090-N/1
2	CONTACT	1	BeCu C17300	Gold Plate	DCT03708-5/1
1	BODY	1	MBsBD C3604BD-F	Gold Plate	DBD00363-5/1 DBD00360-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE



TOLERANCE	Decimal	DATE 2022. 03. 18.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY		
MATERIAL		CHECKED BY		TITLE SMA50 SOLDER END JS-4H
		DRAWN BY	S.H.KIM	
FINISH		SCALE	4/1	DWG NO. CN03605-7/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	

A4