
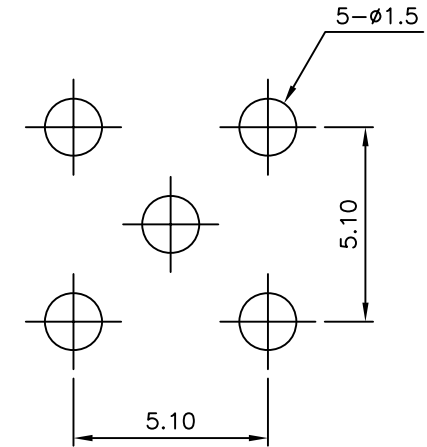
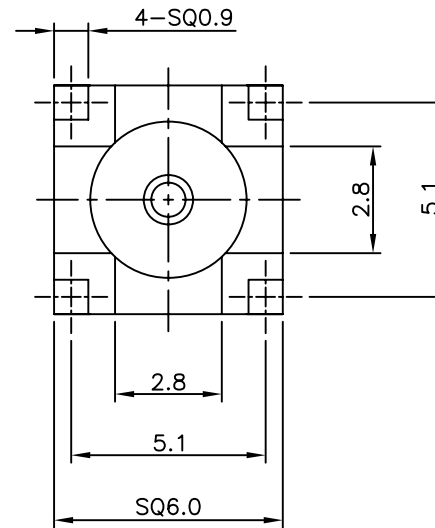


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2021. 06. 09.

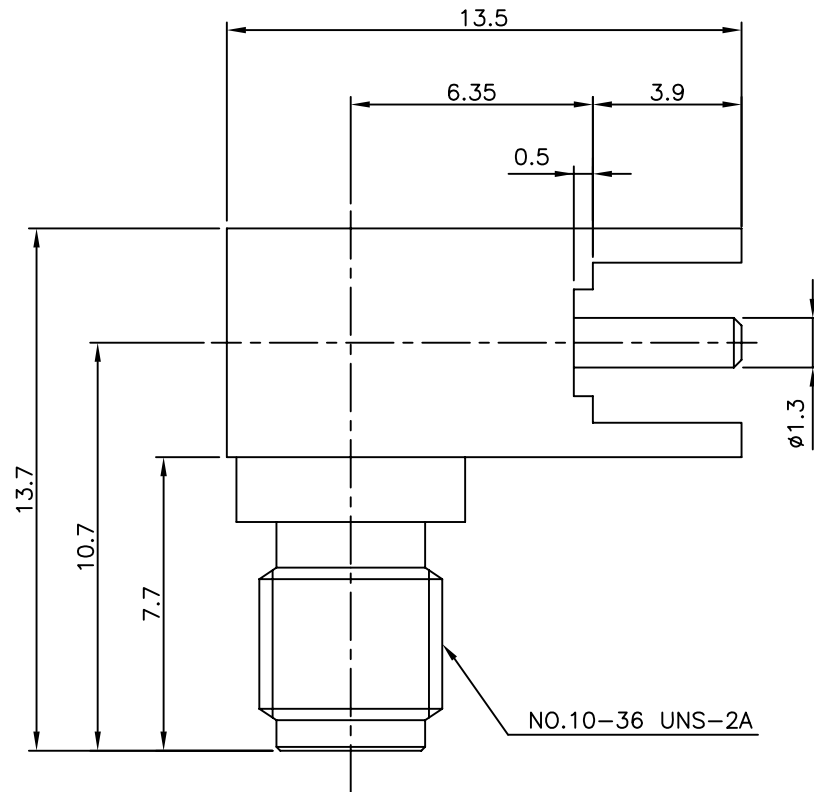

PCB MOUNTING HOLE SIZE

ENVIRONMENTAL DATA:

1. TEMPERATURE RANGE : -40°C ~ +85°C

ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~6GHz
3. VSWR (Max) : 1.2 @ DC~3GHz
1.3 @ 3~6GHz
4. INSULATION RESISTANCE : $\geq 10000M\Omega$
5. CENTER CONTACT RESISTANCE : $\leq 4m\Omega$
6. OUTER CONTACT RESISTANCE : $\leq 2.5m\Omega$
7. DIELECTRIC WITHSTANDING : 750 V RMS

ELECTRICAL DATA :

1. CONNECTOR DURABILITY : 500 Mating cycles min

6	COVER	1	MBsBD C3604BD-F	Gold Plate	DCO00113-5/1	
5	INSULATOR	1	TEFLON		DIN02793-N/1	
4	INSULATOR	1	TEFLON		DIN02792-N/1	
3	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT02842-5/1	
2	CONTACT	1	BeCu C17300	Gold Plate	DCT03719-5/1	
1	1-2 BODY	1	MBsBD C3604BD-F	Gold Plate	DBB00444-5/2	DBD04185-1/2
	1-1 BODY	1	MBsBD C3604BD-F	Gold Plate		DBD04184-1/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE	

TOLERANCE	Decimal	DATE 2021. 06. 09.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE SSMA50 PCB JL-4R
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	5/1	DWG NO. CN03615-7/2 REVISION I R SHEET 1 of 1
		UNIT	mm	