

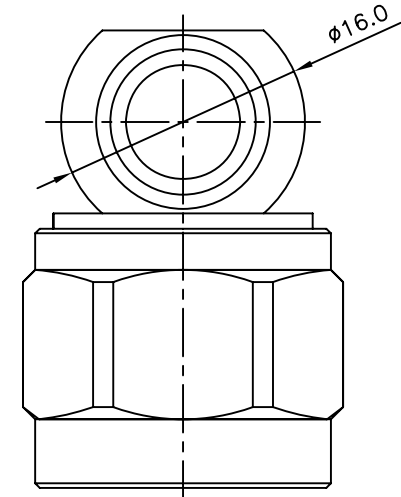
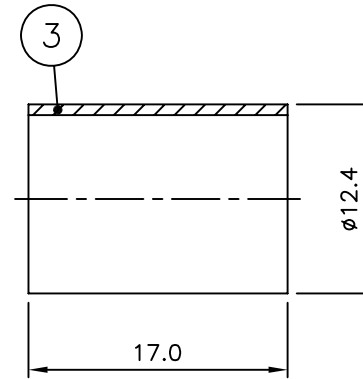


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	G.Y.KIM	I.C.KIM	2016.12.02.

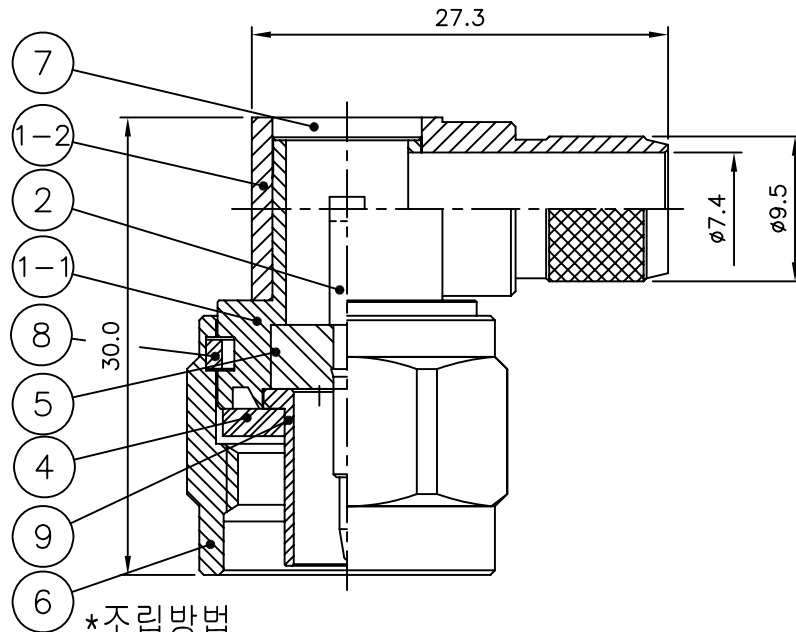

*조립방법

- ①번 BODY(A)에 ⑤⑨번 TEFLON, JACK 순서로 조립한다.
- ①번 BODY(A)에 가시미작업을 하여 ⑨번 JACK을 고정한다.
- ④ GASKET을 조립한다.
- ①번 BODY(A)에 ②번 PIN을 조립한다.
- ①번 BODY(A)에 ⑦번 COVER를 조립한다.
- ⑧번 SPRING RING을 조립한다.
- ⑥번 CAP을 ①번 BODY(A)에 조립한다.

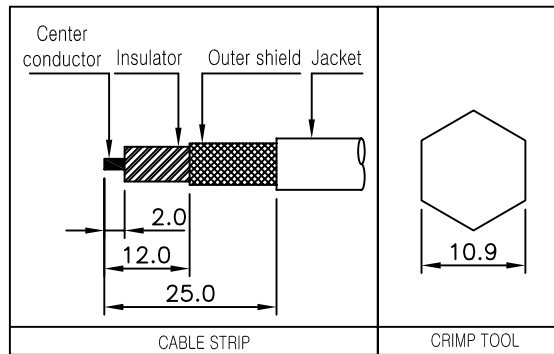

9	JACK	1	MBsBD C3604BD-F	Nickel Plate	DJA00044-5/1
8	SPRING RING	1	PBR	Nickel Plate	DSR00020-5/1
7	COVER	1	MBsBD C3604BD-F	Nickel Plate	DCO00085-5/1
6	COUPLING CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00063-5/3
5	INSULATOR	1	TEFLON		DIN02855-N/1
4	GASKET	1	SILICONE RUB		DGK00013-N/1
3	FERRULE	1	MBsBD C3604BD-F	Nickel Plate	DFE00070-5/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT03788-5/1
1-2	BODY(B)	1	MBsBD C3604BD-F	Nickel Plate	DBD04261-3/1
1-1	BODY(A)	1	MBsBD C3604BD-F	Nickel Plate	DBB00458-5/1 DBD04260-3/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2016. 12. 02.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY	C.K.KIM	KJ COMTECH CO.,LTD. TITLE N75 CABLE PL RG216(75Ω)
		DRAWN BY	G.Y.KIM	
FINISH		SCALE	2/1	A4 DWG NO. CN03663-7/1 REVISION I R SHEET 1 of 1
		UNIT	mm	