


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2017.03.22.

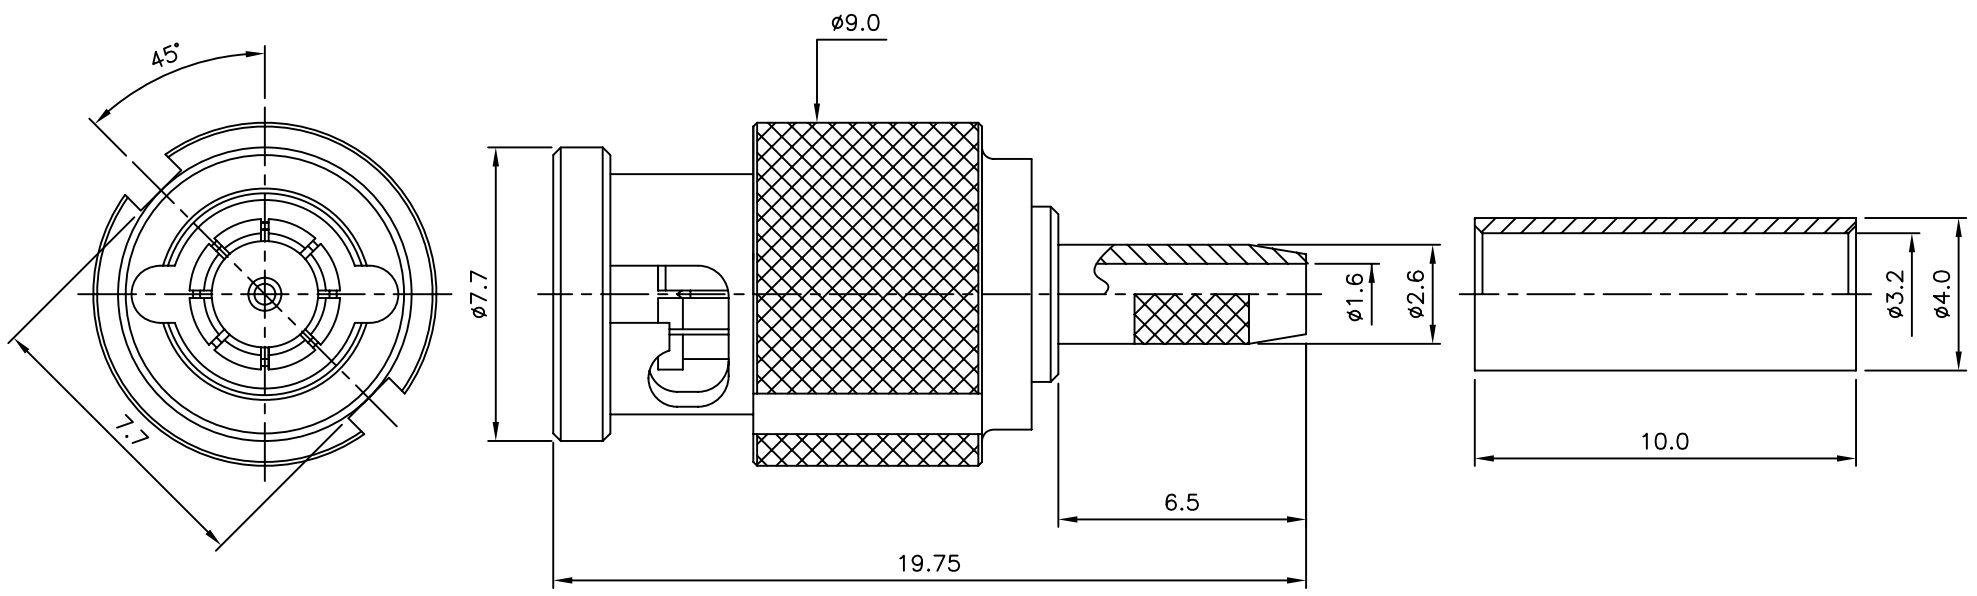

MATERIAL & FINISHES DATA :

1. BODY - BRASS , Nickel Plating
2. CONTACT - BRASS , Gold Plating
3. INSULATOR - PTFE
4. CAP - BRASS , Nickel Plating


ELECTRICAL DATA :

1. IMPEDANCE : 50Ω
2. FREQUENCY RANGE : DC~6GHz
3. VSWR (Max) : 1.35
4. DIELECTRIC WITHSTANDING VOLTAGE : 750 V RMS Min.
5. INSULATION RESISTANCE : 1000MΩ
6. CENTER CONTACT RESISTANCE : ≤ 20mΩ
7. OUTER CONTACT RESISTANCE : ≤ 10mΩ

MECHANICAL DATA :

1. DURABILITY : 500 CYCLES MIN.
2. TEMPERATURE RANGE : -65° C ~ 165° C

*Compliance with standard IP68

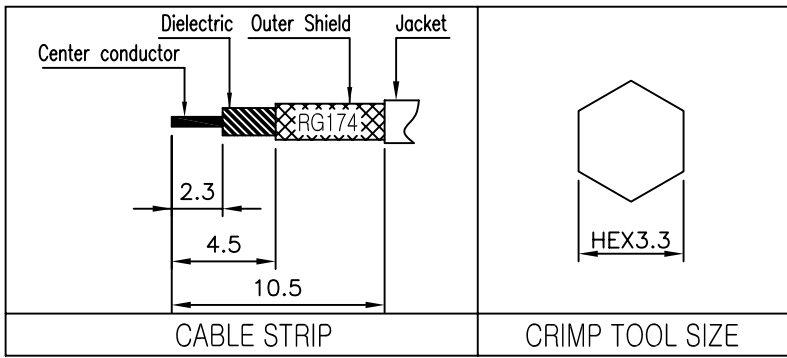

8	SPRING	1	SUS303	Passivated	DSR01156-N/1
7	WASHER	1	MBsBD C3604BD-F	Nickel Plate	DWA00137-5/1
6	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU02289-5/1
5	INSULATOR	1	TEFLON		DIN02889-N/1
4	GASKET	1	SILICONE RUB		DGK00003-N/1
3	FERRULE	1	MBsBD C3604BD-F	Nickel Plate	DFE00034-5/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT03827-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD04305-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2017. 03. 22.		 KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY		
MATERIAL	±1°	CHECKED BY		TITLE UM-BNC50 CABLE PS RG174
		DRAWN BY	I.C.KIM	
FINISH		SCALE	5/1	DWG NO. CN03689-7/1 REVISION I R SHEET 1 of 1
		UNIT	mm	