


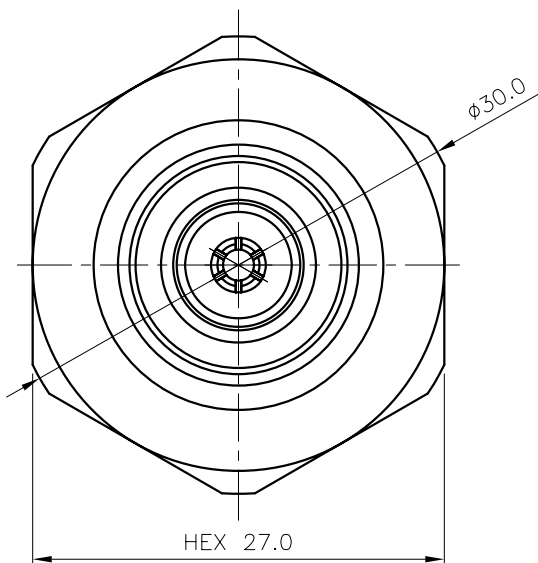


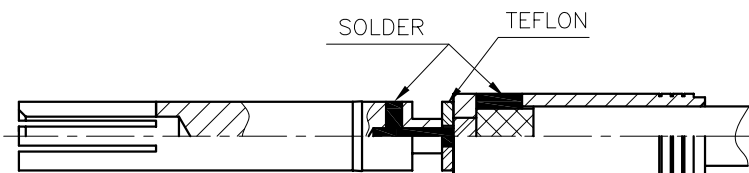


5/8-24 UNEF-2A

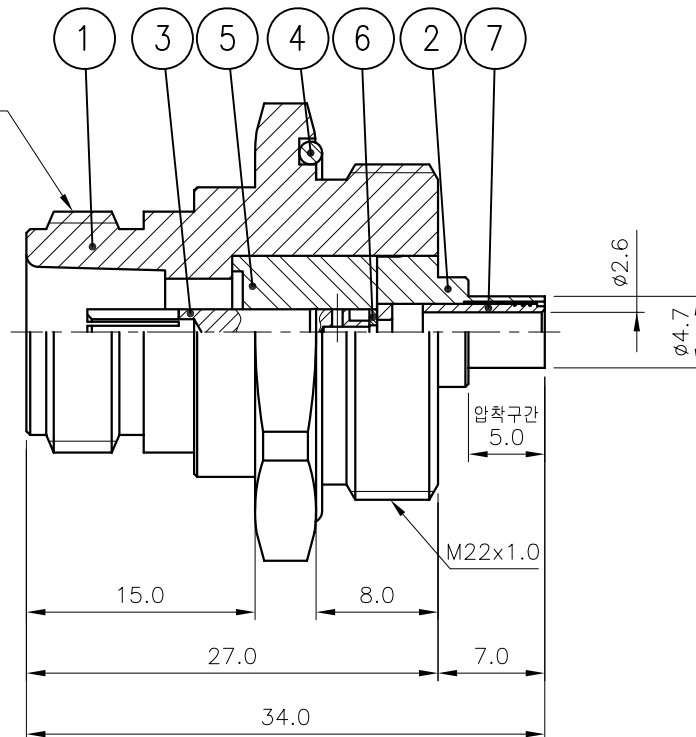

그림과 같이 조립 후 BODY에 끼워넣고 압착한다.

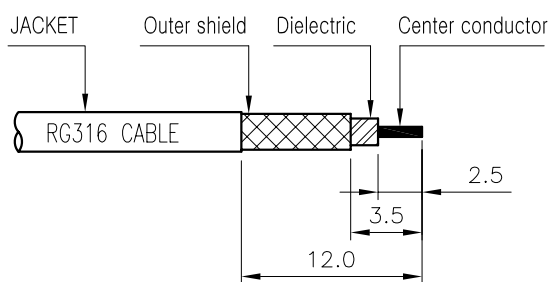

CABLE 탈피도



압착 TOOL SIZE

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2017.07.24.

7	INSERT	1	MBsBD C3604BD-F	Gold Plate	DIS00269-5/1
6	INSULATOR	1	TEFLON		DIN01179-N/1
5	INSULATOR	1	TEFLON		DIN02802-N/1
4	GASKET	1	SILICONE RUB		DGK00191-N/1
3	CONTACT	1	BeCu C17300	Gold Plate	DCT03726-5/2
2	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD04346-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD04328-5/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE	2017. 07. 24.
	Angle	APPROVED BY	
MATERIAL	_____	CHECKED BY	
	_____	DRAWN BY	I.C.KIM
FINISH	_____	SCALE	2/1
	_____	UNIT	mm



RF & MICROWAVE
TECHNOLOGY
Tel : 82-32-347-8015
Fax : 82-32-347-8017

TITLE N50 CABLE JS RG316

DWG NO. CN03706-7/2

REVISION I R SHEET 1 of 1

A4