





Mate compatible table	
SMA [~18GHz]	Mate
3.5mm [~26.5GHz]	
2.92mm(K) [~40GHz]	
2.4mm [~50GHz]	Mate
1.85mm(V) [~65GHz]	

Un mate

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2020.01.30.

ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~40GHz
3. VSWR (Max) : 1.2

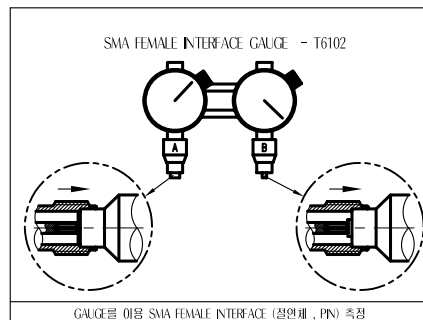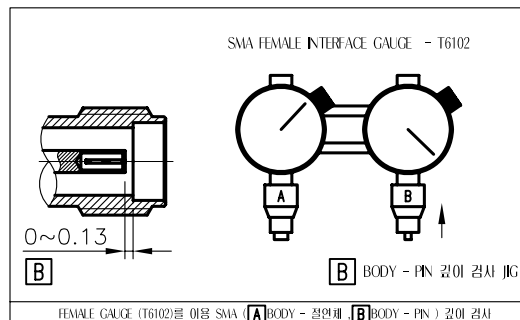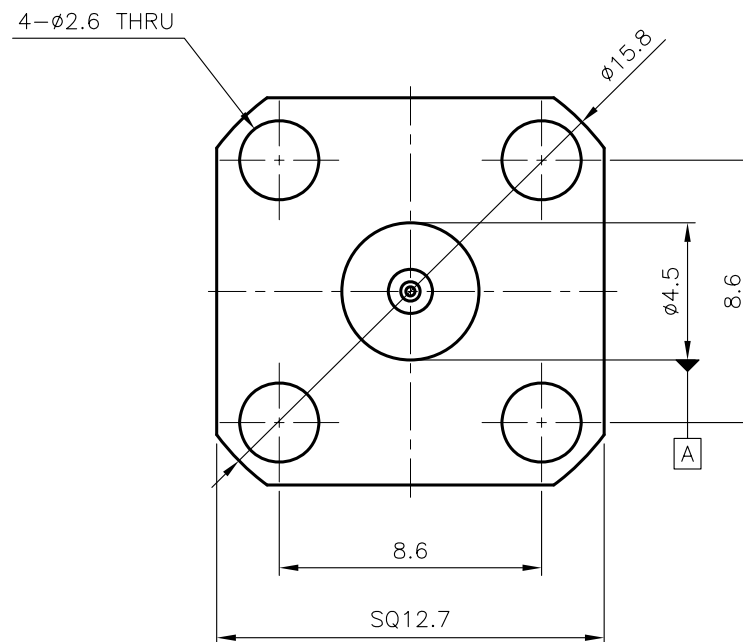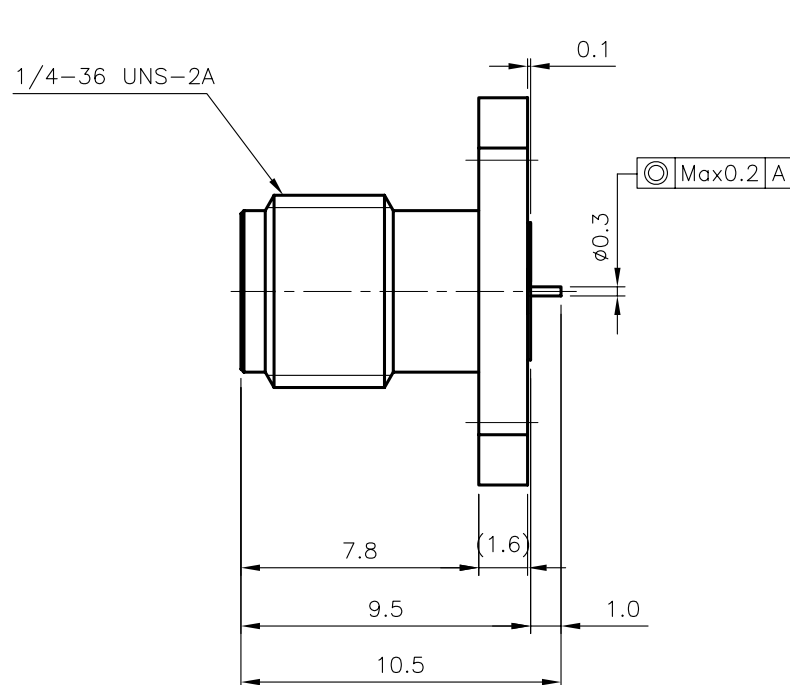

** PIN 높이 검사 방법 **

3	INSULATOR	1	TEFLON		DIN02928-N/1
2	CONTACT	1	BeCu C17300	Gold Plate	DCT03864-5/6
1	BODY	1	SUS	Passivated	DBD04342-5/3
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017			
	±0.2	2020. 01. 30.						
	Angle	APPROVED BY	I.C.KIM					
MATERIAL	±1°	CHECKED BY	TITLE 2.92mm SOLDER END JS-4H					
	_____	DRAWN BY				S.Y.EUN		
FINISH	_____	SCALE	UNIT		A4	DWG NO.	CN03716-7/6	
		4/1	mm			REVISION	I R	SHEET