


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2020.04.02.

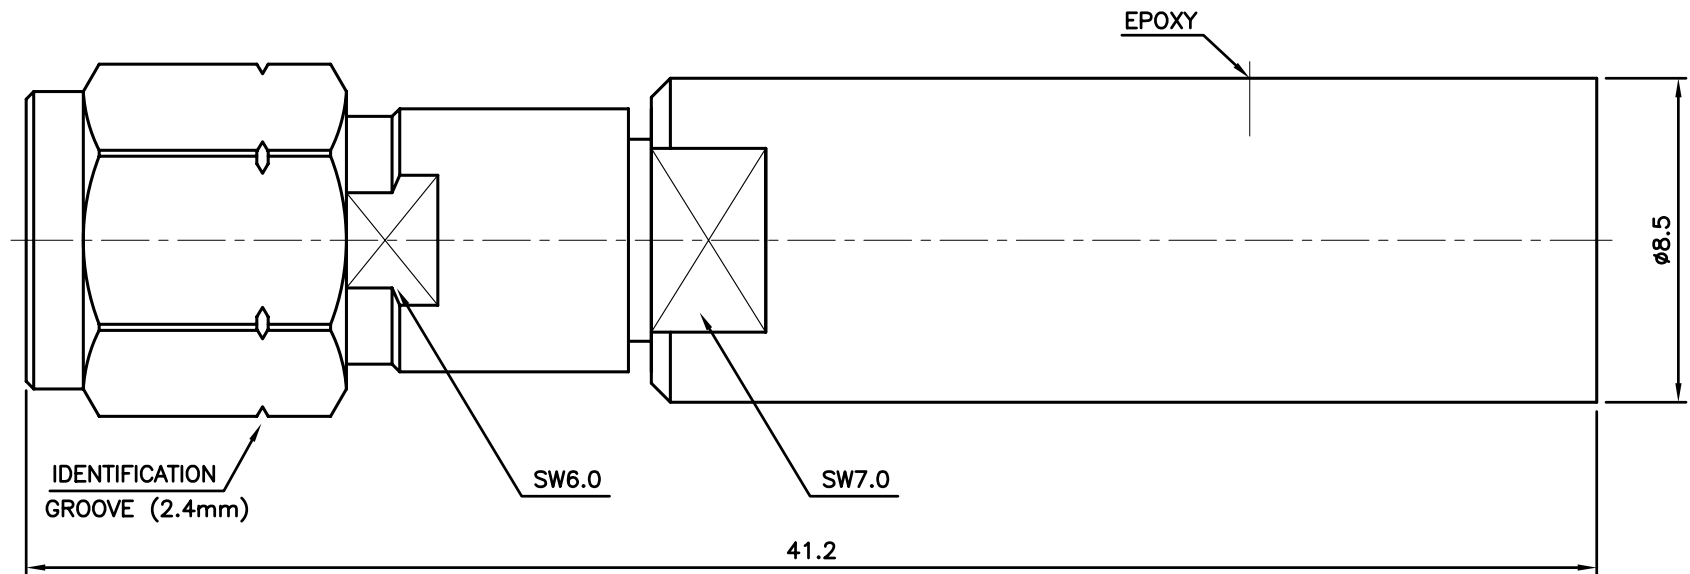


ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~50GHz
3. VSWR (Max) : 1.25

Mate compatible table	
SMA [~18GHz]	Mate
3.5mm [~26.5GHz]	
2.92mm(K) [~40GHz]	
2.4mm [~50GHz]	Mate
1.85mm(V) [~65GHz]	

Un mate

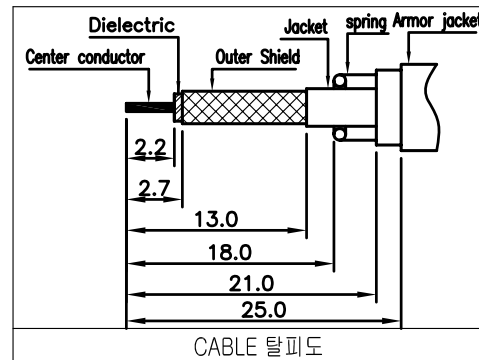

8	CLAMP	1	MBsBD C3604BD-F	Nickel Plate	DBN00213-5/5
7	CAP	1	SUS	Passivated	DCU02297-5/2
6	SPRING RING	1	SUS	Passivated	DSR00002-5/1
5	INSERT	1	MBsBD C3604BD-F	Gold Plate	DIS00286-5/2
4	INSERT	1	SUS	Passivated	DIS00285-5/4
3	INSULATOR	1	PEEK		DIN02989-N/8
2	CONTACT	1	BeCu C17300	Gold Plate	DCT03950-5/A
1	BODY	1	SUS	Passivated	DBD04404-5/3
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2020. 04. 02.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE 2.4mm CABLE PS MUAF05SD Armor type
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	UNIT	DWG NO. CN03783-7/4 REVISION I R SHEET 1 of 1
		5/1	mm	

A4