
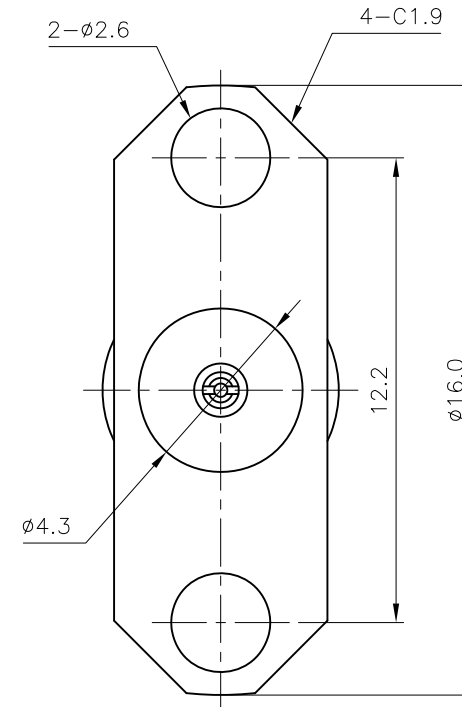


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2019.02.11.
2	결합 Pin 내경 변경(ø0.36)	S.L.SON	J.H.YOUN	2019.08.07.

1/4-36 UNS-2A

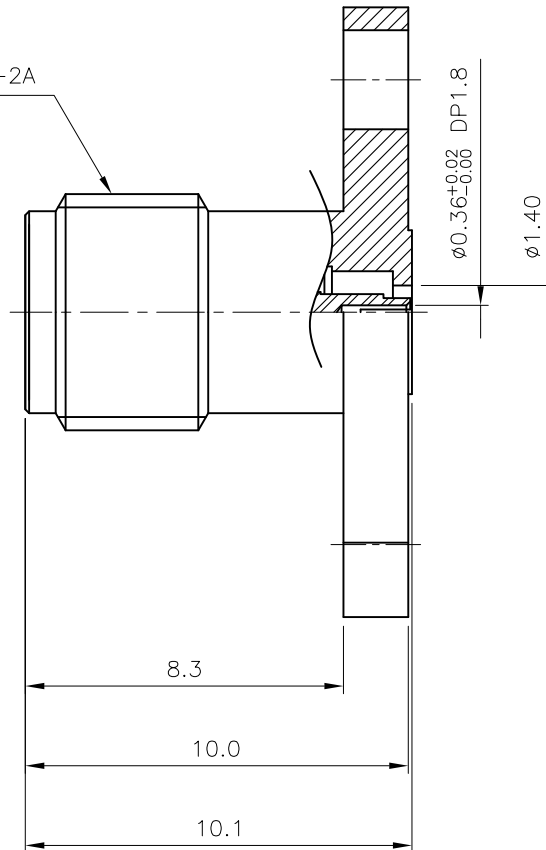

Insulator + Insert

- 상 지그
: DEQ00147
- 하 지그
: DEQ00512-2/4

절연체 PEEK 절단 지그

- 상 지그
: DEQ00500-1/1
- 하 지그 (절연체 절단 하 JIG)
: DEQ00502-1/1
- 하 지그 (절연체 절단 고정 JIG)
: DEQ00501-1/4

ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~40GHz
3. VSWR (Max) : 1.3:1

4	INSERT	1	SUS303	Passivated	DIS00288-5/2
3	INSULATOR	1	PEEK		DIN02942-N/I
2	CONTACT	1	BeCu C17300	Gold Plate	DCT03957-5/7
1	BODY	1	SUS303	Passivated	DBD04413-5/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2019. 08. 07.	
	Angle	APPROVED BY J.H.YOUN	
MATERIAL		CHECKED BY	
		DRAWN BY S.L.SON	
FINISH		SCALE	UNIT
		5/1	mm



RF & MICROWAVE
TECHNOLOGY
Tel : 82-32-347-8015
Fax : 82-32-347-8017

TITLE
SMA 2.92mm (F) 2 Hole Flanged

A4	DWG NO.	CN03789-7/2	
	REVISION	2	SHEET 1 of 1