
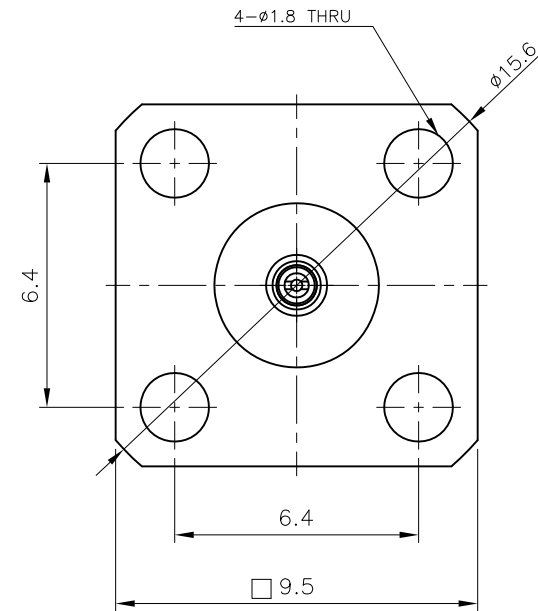


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2019.09.19.

2.92mm FEMALE

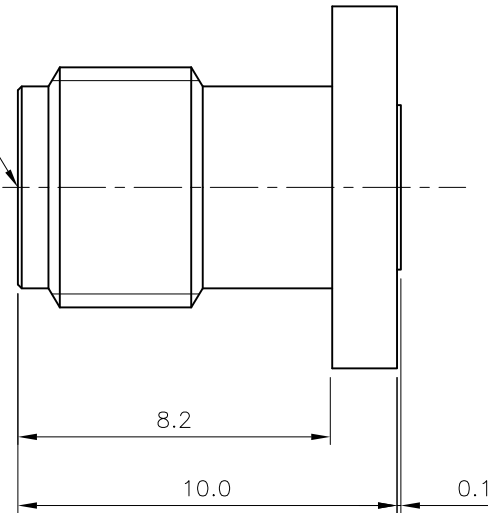

Insulator + Insert

- 상 지그
: DEQ00147
- 하 지그
: DEQ00512-2/4

절연체 PEEK 절단 지그

- 상 지그
: DEQ00500-1/1
- 하 지그 (절연체 절단 하 JIG)
: DEQ00502-1/1
- 하 지그 (절연체 절단 고정 JIG)
: DEQ00501-1/4

ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~40GHz
3. VSWR (Max) : 1.2

4	INSERT	1	SUS303	Passivated	DIS00288-5/2
3	INSULATOR	1	PEEK		DIN02942-N/I
2	CONTACT	1	BeCu C17300	Gold Plate	DCT03961-5/4
1	BODY	1	SUS303	Passivated	DBD04418-5/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2018. 09. 19.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE 2.92mm (J) 4Hole Flanged
		DRAWN BY	S.L.SON	
FINISH		SCALE	5/1	DWG NO. CN03790-7/1
		UNIT	mm	REVISION 1 SHEET 1 of 1