
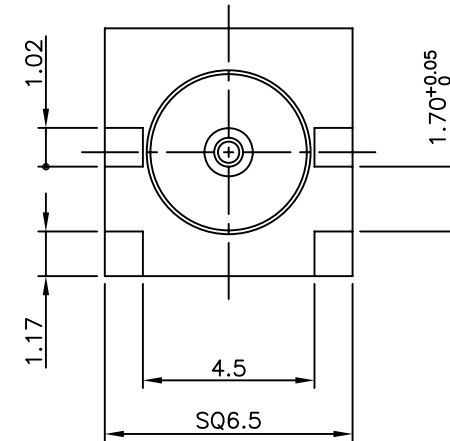


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2018.11.20.
1	[설번처리No.201812-0002] 절연체 돌출방지로 인한 변경	S.Y.EUN	I.C.KIM	2018.12.06.

1/4-36 UNS-2A

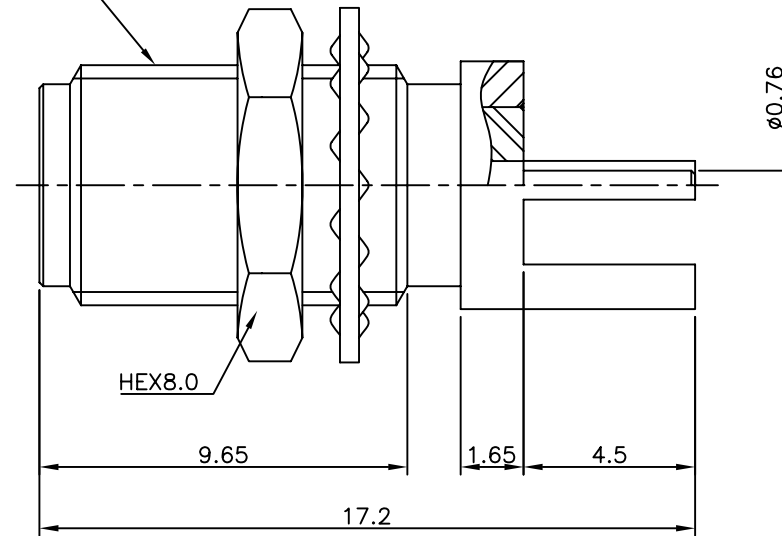

ENVIRONMENTAL DATA:

1. TEMPERATURE RANGE : -65°C ~ +85°C
2. Vibration : MIL-STD-202
3. Shock : MIL-STD-202

ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~8GHz
3. VSWR (Max) : 1.2
4. INSULATION RESISTANCE : 5000MΩ (min)
5. INTERFACE : MIL-C-39012
6. RF Leakage : -60dBm (min), 2~3GHz

MECHANICAL DATA :

1. RECOMMENDED COUPLING NUT TORQUE : 0.8Nm~1.1Nm
2. Durability : 500 Mating

5	WASHER	1	BsS	Gold Plate	DWA00005-5/1
4	NUT	1	MBsBD C3604BD-F	Gold Plate	DNT00025-5/1
3	INSULATOR	1	TEFLON		DIN00103-N/2 DIN00103-N/1
2	CONTACT	1	BeCu C17300	Gold Plate	DCT01662-5/2
1	BODY	1	MBsBD C3604BD-F	Gold Plate	DBD04442-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2018. 12. 06.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE SMA50 PCB JS-4R (edge)
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	5/1	A4 DWG NO. CN03801-7/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	