


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2018.11.12.

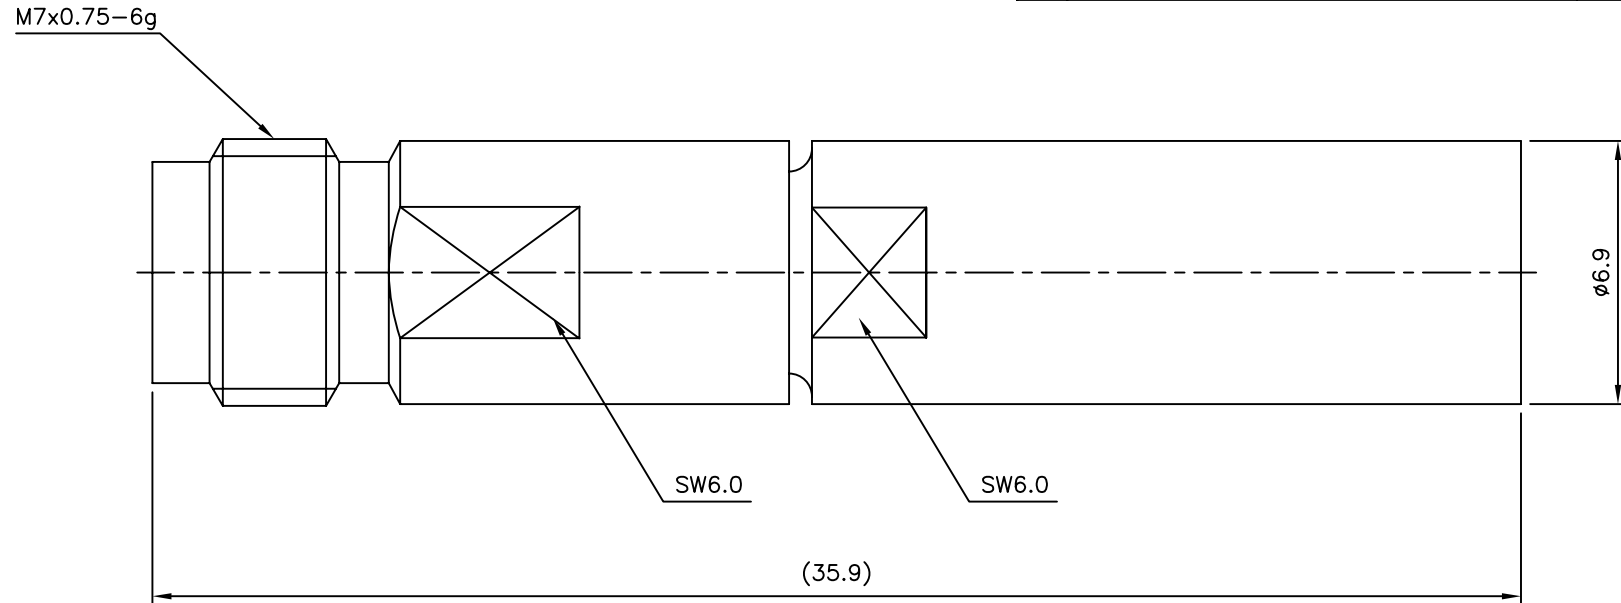


ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~50GHz
3. VSWR (Max) : 1.25

Mate compatible table	
SMA [~18GHz]	Mate
3.5mm [~26.5GHz]	
2.92mm(K) [~40GHz]	
2.4mm [~50GHz]	Mate
1.85mm(V) [~65GHz]	

Un mate

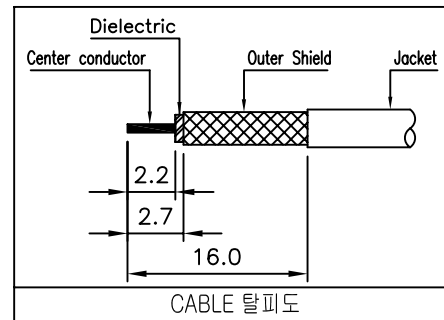

6	CLAMP	1	MBsBD C3604BD-F	Nickel Plate	DBN00213-5/4
5	INSERT	1	MBsBD C3604BD-F	Gold Plate	DIS00286-5/2
4	INSERT	1	SUS303	Passivated	DIS00290-5/1
3	INSULATOR	1	PEEK		DIN02989-N/8
2	CONTACT	1	BeCu C17300	Gold Plate	DCT03978-5/1
1	BODY	1	SUS303	Passivated	DBD04440-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2018. 11. 12.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY			
MATERIAL	±0.2	CHECKED BY			TITLE 2.4mm CABLE JS MUAF05SD
	±1°	DRAWN BY I.C.KIM			
FINISH		SCALE 5/1	UNIT mm		DWG NO. CN03803-7/1
					REVISION I R
					SHEET 1 of 1