

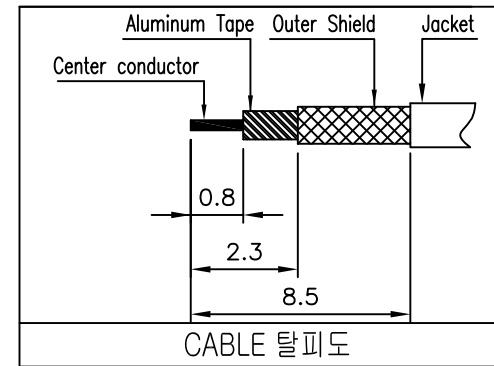


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	S.H.KIM	2022.06.23.

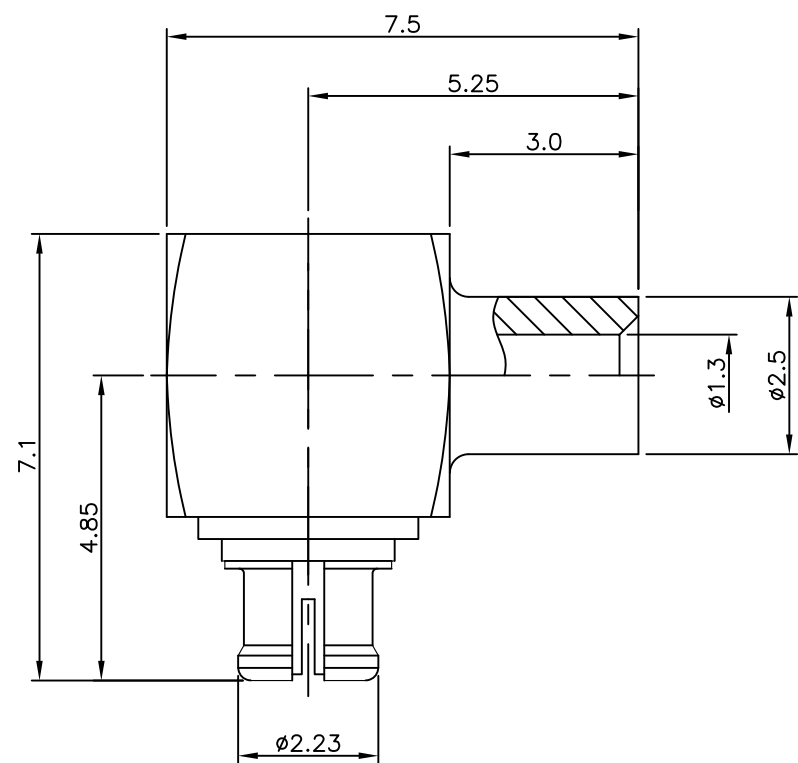

■ Mating 검사 진행

SMPM Female SMPM Male

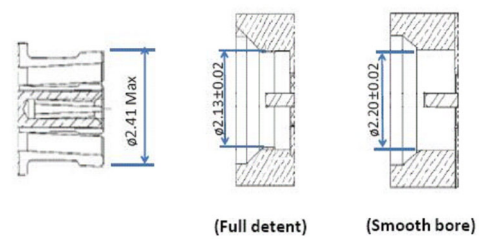

■ SMPM Female ↔ Male KJ 제품Code

SMPM Female	SMPM Male (Full detent)	SMPM Male (Smooth bore)
AD00660	CN03826	CN03815

■ Frequency range : DC ~ 65GHz

Engagement force	Full detent : < 36N (=3.67kgf) Smooth detent : < 18N (=1.83kgf)
Disengagement force	Full detent : < 36N (=3.67kgf) Smooth detent : < 18N (=1.83kgf)

4	COVER	1	MBsBD C3604BD-F	Nickel Plate	DCO00006-5/1
3	INSULATOR	1	TEFLON		DIN03091-N/2
2	CONTACT	1	BeCu C17300	Gold Plate	DCT04073-5/3
1	1-2 BODY (B)	1	BeCu C17300	Gold Plate	DBD04559-5/3
	1-1 BODY (A)	1	MBsBD C3604BD-F	Nickel Plate (납땜성향상)	DBD04558-5/3
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.2	DATE 2022. 06. 23.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		
	Angle ±1°	APPROVED BY S.H.KIM					
MATERIAL _____		CHECKED BY			TITLE SMPM50 CABLE JL 47F		
		DRAWN BY S.Y.EUN					
FINISH _____		SCALE 8/1	UNIT mm		A4	DWG NO. CN03885-7/4	
						REVISION	I R