
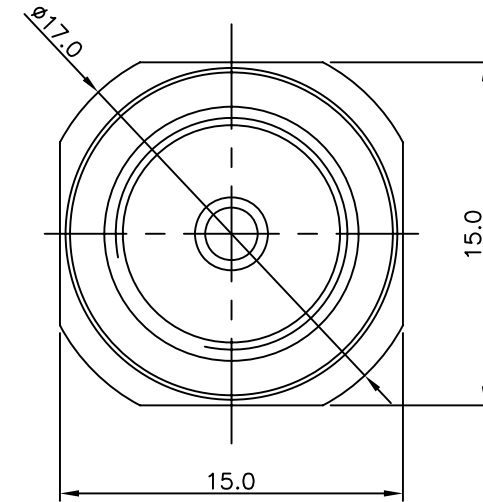


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2021.12.06.

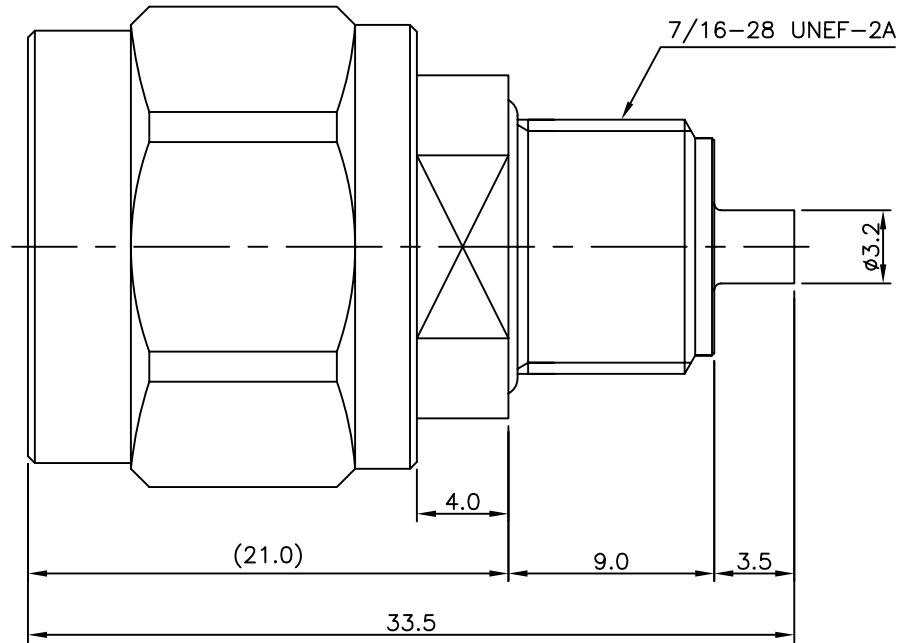

■ ELECTRICAL DATA :

1. IMPEDANCE : 50Ω
2. FREQUENCY RANGE : DC~5.9GHz
3. VSWR (Max) : 1.25

■ Compliance with standard IP67

7	SPRING RING	1	PBR	Nickel Plated	DSR00020-5/1
6	COUPLING CAP	1	MBsBD C3604BD-F	이원합금 (Ni/Tin)	DCU00063-5/6
5	INSULATOR	1	TEFLON		DIN03051-N/1
4	GASKET	1	SILICONE		DGK00032-N/1
3	GASKET	1	SILICONE		DGK00013-N/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plated	DCT04016-5/2
1	BODY	1	MBsBD C3604BD-F	이원합금 (Ni/Tin)	DBD04618-5/3
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2021. 12. 06.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle	APPROVED BY	I.C.KIM			
	$\pm 1^{\circ}$	CHECKED BY				
MATERIAL	_____	DRAWN BY	S.Y.EUN		TITLE N50 CABLE PB (R/N) 85F	
FINISH	_____	SCALE 3/1	UNIT mm			
A4					DWG NO. CN03925-7/4	
					REVISION I R	SHEET 1 of 1

A4 DWG NO. CN03925-7/4 REVISION I R SHEET 1 of 1