


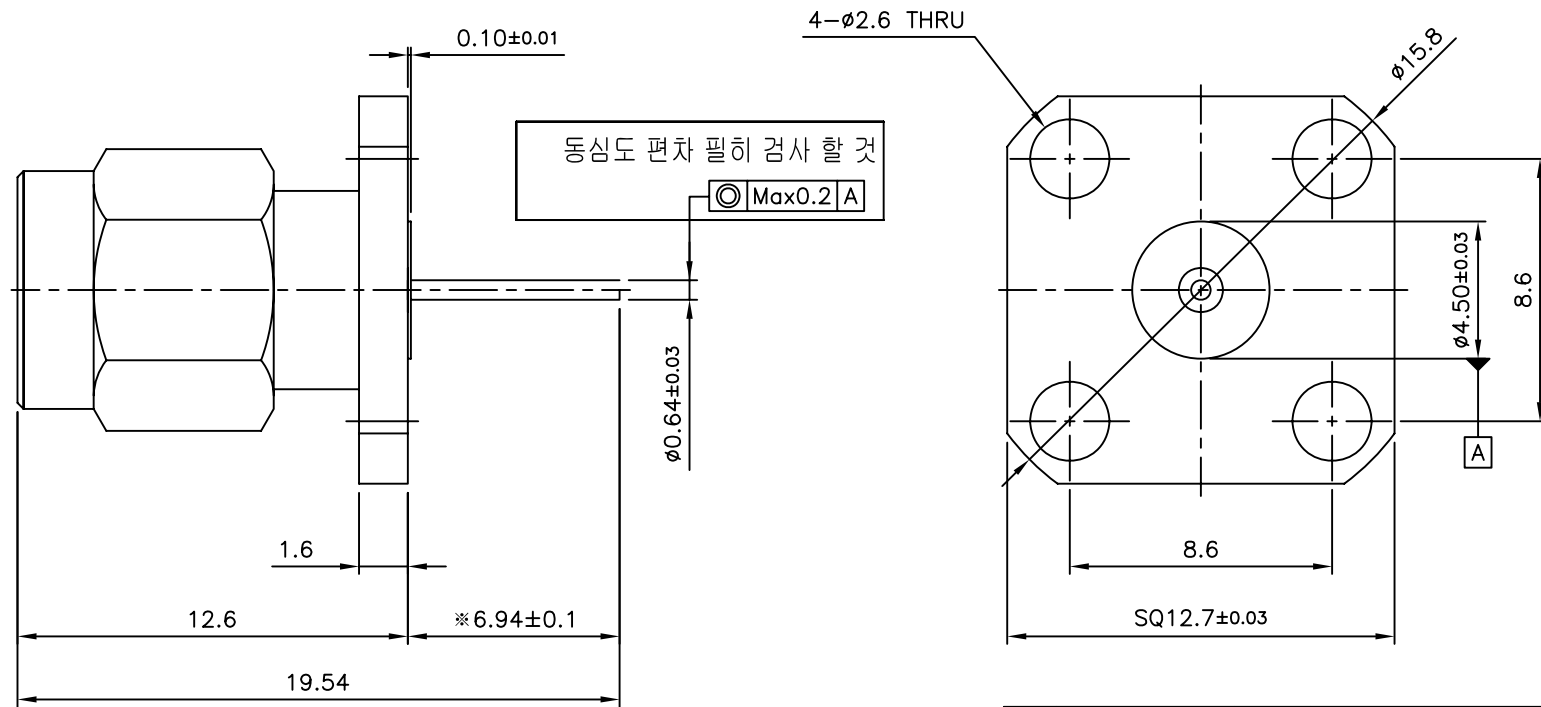

ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~40GHz
3. VSWR (Max) : 1.2

Mate compatible table	
SMA [~18GHz]	Mate
3.5mm [~26.5GHz]	
2.92mm(K) [~40GHz]	
2.4mm [~50GHz]	Mate
1.85mm(V) [~65GHz]	

Un mate

7	포장금형 GASKET	1	NBR	BLACK	DGK00335-N/1
6	SPRING RING	1	SUS	Passivate	DSR00002-5/1
5	CAP	1	SUS		DCU00006-5/1
4	INSERT	1	SUS	Passivate	DIS00281-5/5
3	INSULATOR	1	PEEK		DIN02942-N/C
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT04159-5/2
1	BODY	1	SUS	Passivated	DBD04661-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2020. 10. 12.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL	±1°	CHECKED BY		TITLE 2.92mm SOLDER END PS-4H
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	4/1	DWG NO. CN03952-7/1
		UNIT	mm	
		A4		REVISION I R
				SHEET 1 of 1