


REVISION						
REV	DESCRIPTION			DRAWN	APPR	DATE
IR	Initial Registration			S.Y.EUN	I.C.KIM	2020.10.12.

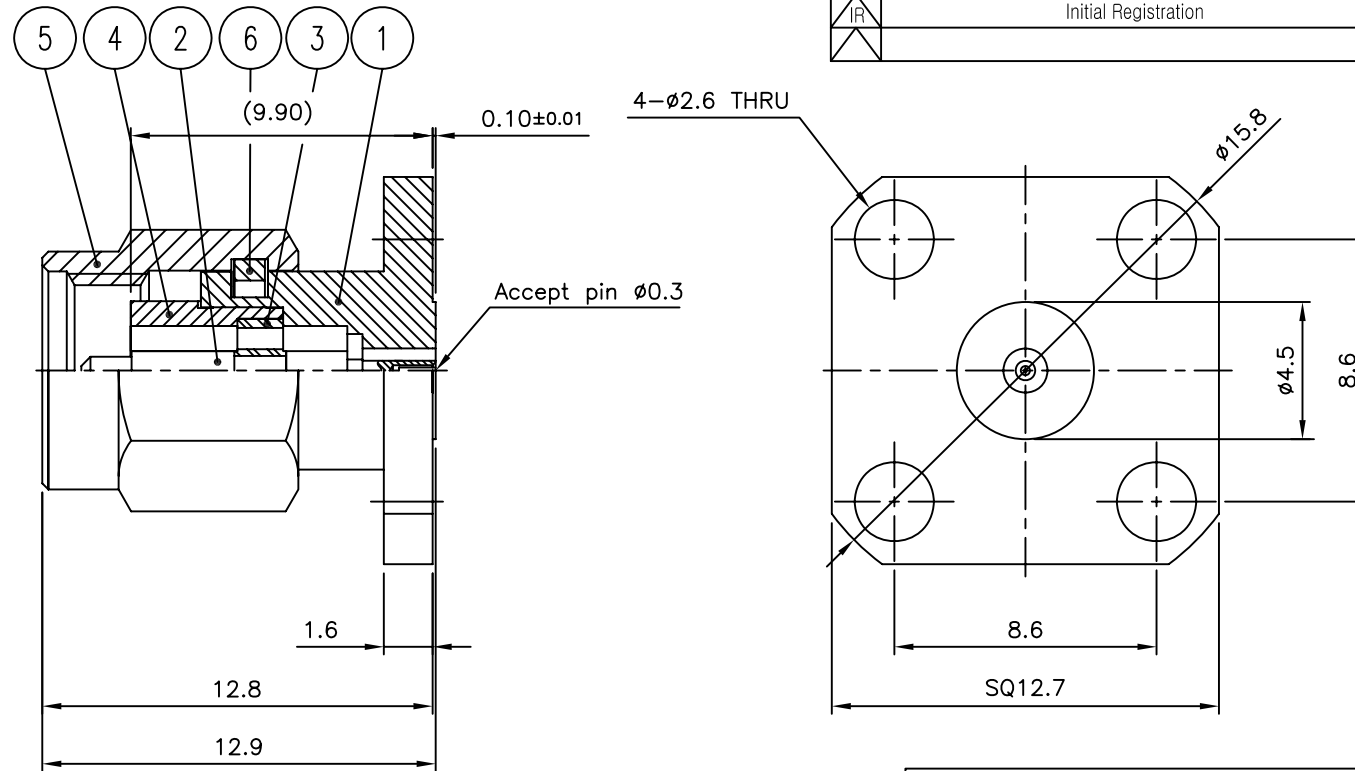


ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~40GHz
3. VSWR (Max) : 1.2

Mate compatible table	
SMA [~18GHz]	Mate
3.5mm [~26.5GHz]	
2.92mm(K) [~40GHz]	
2.4mm [~50GHz]	Mate
1.85mm(V) [~65GHz]	

Un mate

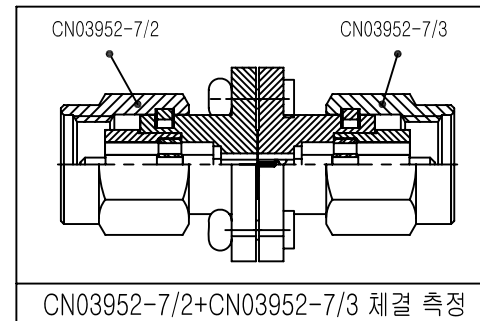

CN03952-7/2+CN03952-7/3 체결 측정

※ CN03952-7/1 검증용 커넥터 (B)

6	SPRING RING	1	SUS	Passivate	DSR00002-5/1
5	CAP	1	SUS		DCU00006-5/1
4	INSERT	1	SUS	Passivate	DIS00281-5/5
3	INSULATOR	1	PEEK		DIN02942-N/C
2	CONTACT	1	BeCu C17300	Gold Plate	DCT04159-5/5
1	BODY	1	SUS	Passivated	DBD04661-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2020. 10. 12.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL	_____	CHECKED BY		KJ COMTECH CO.,LTD. TITLE 2.92mm SOLDER END PS-4H
		DRAWN BY	S.Y.EUN	
FINISH	_____	SCALE	4/1	A4 DWG NO. CN03952-7/3 REVISION I R SHEET 1 of 1
		UNIT	mm	